


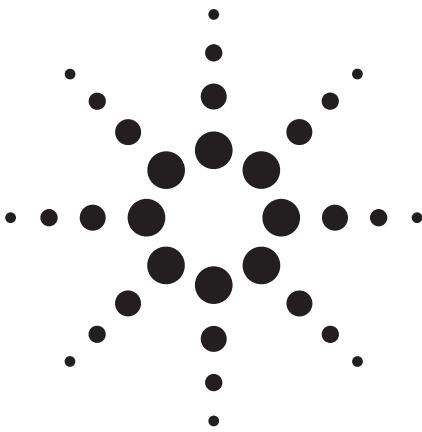


Agilent E1505A

8-Channel Current Source SCP

Data Sheet

- Use with Agilent E1413C/E1415A/E1419A
- Eight programmable current sources
- Input over-voltage protection
- Current source for resistance and temperature measurements

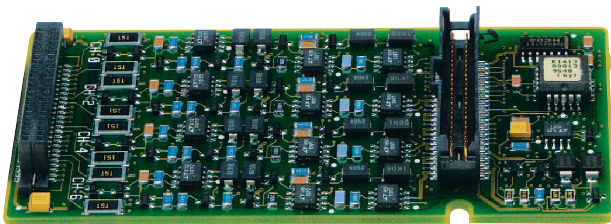

Agilent E1505A

Description

The Agilent E1505A 8-Channel Current Source SCP provides eight current sources programmable to one of two current levels. Each current source can be programmed to provide either 30 μA or 488 μA . The E1505A SCP is used to supply excitation current to resistance and resistance-temperature measurements. It also provides over-voltage protection on each channel.

Use the E1505A with the following VXI modules:

Model	Description
E1413C	64-Channel Scanning A/D Converter
E1415A	Algorithmic Closed Loop Controller
E1419A	Multifunction Measurement and Control Module

Refer to the Agilent Technologies Website for recent product updates, if applicable.


Resistance Measurements

Resistance is measured using the E1505A 8-Channel Current Source SCP and an input SCP. Measurements are made by applying a dc current to the unknown and measuring the voltage drop across the unknown resistance. The current source is provided through the E1505A.

The recommended application is as shown here using four-wire Ω connections. Two-wire Ω measurement is possible but not recommended since two 150 Ω series resistors protecting the input FET multiplexer are included in the measurement.



Agilent Technologies
Innovating the HP Way

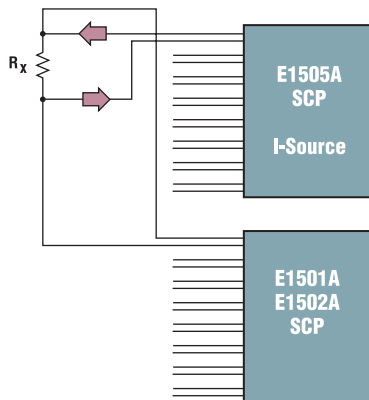

Product Specifications

These specifications for the E1505A reflect the combined performance of the scanning A/D and the E1505A SCP.

Current Source

Minimum: 30.5 $\mu\text{A} \pm 9 \text{ nA}$
Maximum: 488.3 $\mu\text{A} \pm 60 \text{ nA}$

Output Accuracy

90-day, 23 °C ± 1 °C (with *CAL? done 1 hr after warm up)

Current Amplitude:

30.518 μA : $\pm 9 \text{ nA}$
488.28 μA : $\pm 60 \text{ nA}$

Resistance Measurements

Range Ω s FS	Current Amplitude	A/D Range (Vdc)	Maximum Resolution
131.1 k	30.518 μA	4	4 Ω
32.77 k	30.518 μA	1	1 Ω
8.192 k	30.518 μA	.25	.25 Ω
8.192 k	488.28 μA	4	.25 Ω
2.048 k	488.28 μA	1	.0625 Ω
512	488.28 μA	.25	.015 Ω
128	488.28 μA	.0625	.0039 Ω

Resistance Accuracy

Any input SCP/most sensitive range. Four-wire connection.

Gain:

30.518 μA : $\pm 0.035\%$ of rdg

488.28 μA : $\pm 0.02\%$ of rdg

Offset Ω :

[offset of input SCP (in Volts)]/[current source value (in Amps)]

Noise Ω :

[noise of input SCP (in Volts)]/[current source value (in Amps)]

Current Requirements (Amps)

5 V max	24 V max	-24 V max
0.02	0.03	0.03

Ordering Information

Description	Product No.
8-Channel Current Source SCP	E1505A

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax

United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5966-2387E



Agilent Technologies
Innovating the HP Way