



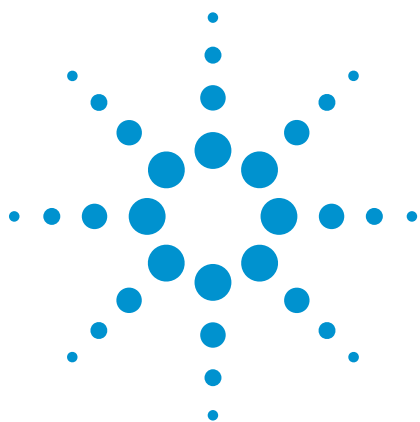

Serial Bus Applications for InfiniiVision 3000 X-Series Oscilloscopes

Data Sheet

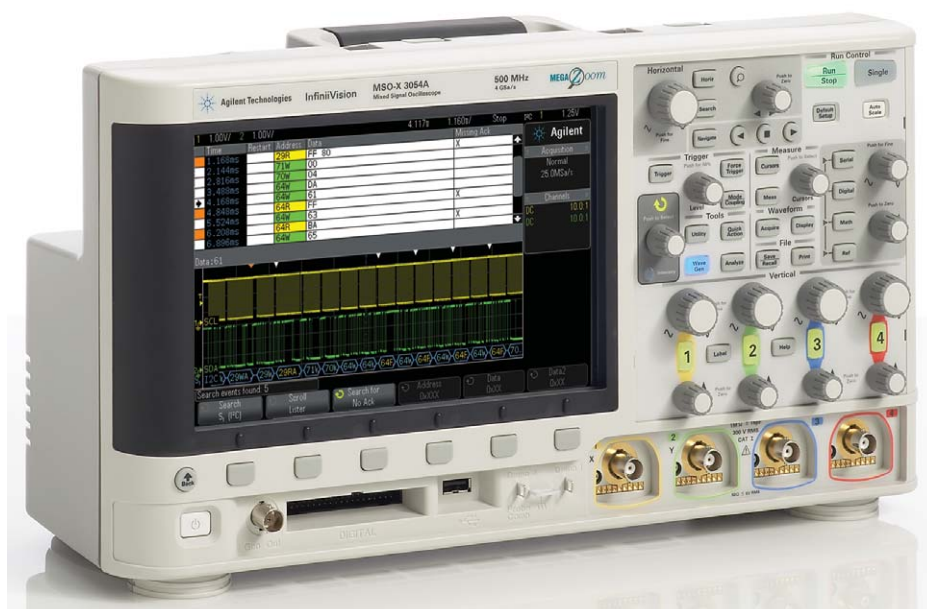

Supported protocols and features

- I²C
- SPI
- RS232/UART
- I²S
- CAN
- LIN
- FlexRay
- MIL-STD 1553
- ARINC 429
- Hardware-based decoding
- Multi-bus analysis
- Automatic search and navigation
- Compatibility with segmented memory acquisition
- Eye-diagram mask files available for CAN, FlexRay, MIL-STD 1553, and ARINC 429 (requires DS0X3MASK mask test option)

Introduction

Serial buses are pervasive in today's digital designs and are used for a variety of purposes including on-board chip-to-chip communication, CPU to peripheral control, as well as for remote sensor data transfer and control. Without intelligent oscilloscope serial bus triggering and protocol decode, it can be difficult to debug these buses and correlate data transfers with other mixed signal interactions in your system. Agilent's InfiniiVision 3000 X-Series oscilloscopes (DSOs) and mixed signal oscilloscopes (MSOs) offer optional integrated serial bus triggering and hardware-based protocol decoding solutions that give you the tools you need to accelerate debug of your designs that include serial bus communication.



Hardware-Based Decoding

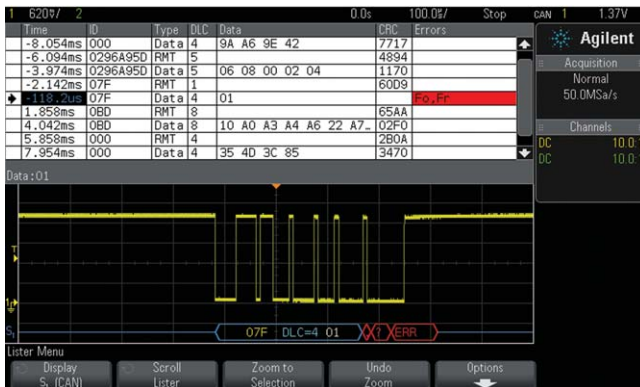


Figure 1: Hardware-based decoding quickly reveals serial communication errors.

Agilent's InfiniiVision Series oscilloscopes are the industry's only scopes to use hardware-based decoding. Other vendor's scopes with serial bus triggering and protocol decode, use software post-processing techniques to decode serial packets/frames. With these software techniques, waveform and decode-update rates tend to be slow (sometimes seconds per update.) That's especially true when using deep memory, which is often required to capture multiple packetized serial bus signals. And when analyzing multiple serial buses simultaneously, software techniques can make decode update rates even slower.

Faster decoding with hardware-based technology enhances scope usability, and more importantly, the probability of capturing infrequent serial communication errors. Figure 1 shows an example of an Agilent 3000 X-Series scope capturing a random and infrequent CAN error frame. The upper half of the scope's display shows the decoded data in a "Lister" format, along with a time-correlated decode trace shown below the waveform.

Automatic Search and Navigation

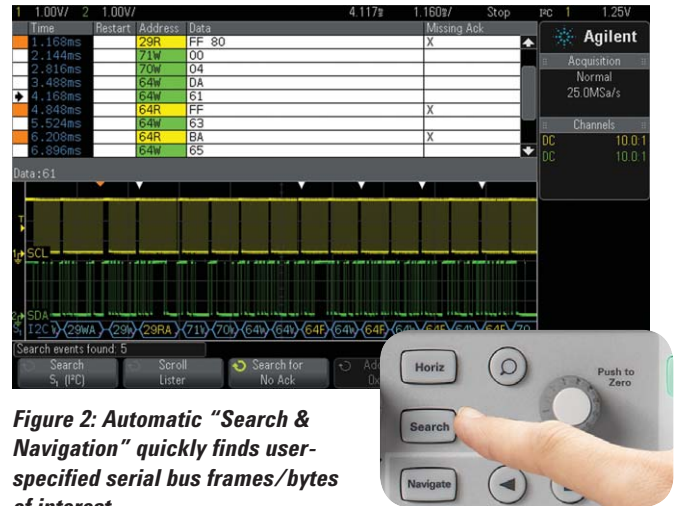


Figure 2: Automatic "Search & Navigation" quickly finds user-specified serial bus frames/bytes of interest.

After capturing a long record of serial bus communication using the InfiniiVision scope's *MegaZoom* deep memory, you can easily perform a search operation based on specific criteria that you enter. Then, you can quickly navigate to bytes/frames of serial data that satisfy the entered search criteria. Figure 2 shows an example of searching on captured I²C data to find all occurrences of Read or Write operations with "No Ack." In this case, the scope found five occurrences of data transfers with "No Ack," and marked each occurrence with a white triangle to show where in time they happened relative to the captured waveform. Navigating and zooming-in on each marked byte/frame is quick and easy using the scope's front panel navigation keys.

Multi-bus Analysis

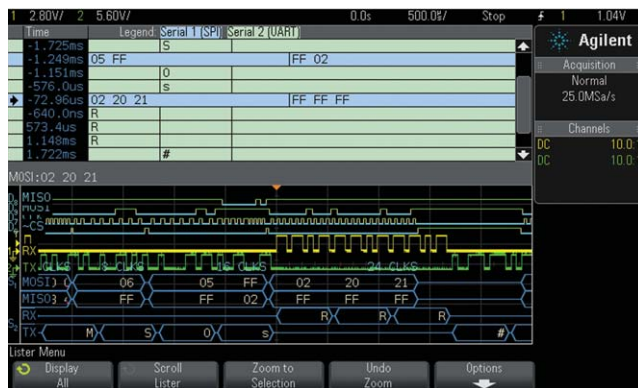


Figure 3: An interleaved “Lister” makes it easier to time-correlate activity between two decoded serial buses.

Many of today’s designs include multiple serial buses. Sometimes it may be necessary to correlate data from one serial bus to another. Agilent’s InfiniiVision 3000 X-Series oscilloscope can decode two serial buses simultaneously using hardware-based decoding. Plus it is the only scope on the market that can also display the captured data in a time-interleaved “Lister” display, as shown in Figure 3. In this particular example, the scope has decoded a 4-wire SPI bus in a HEX format, along with transmit and receive RS232/UART signals in an ASCII-decoded format.

Using Segmented Memory to Capture Multiple Serial Bus Packets

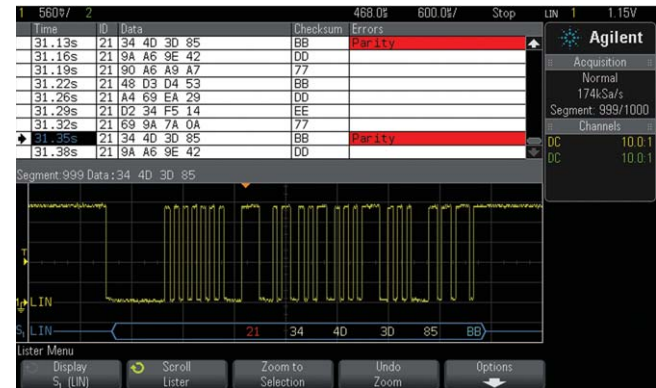


Figure 4: Segmented memory acquisition selectively captures more packets/bytes of serial bus activity.

The segmented memory option for Agilent’s InfiniiVision 3000 X-Series oscilloscope can optimize your scope’s memory, letting you capture more packets/frames of serial bus activity. Segmented memory acquisition optimizes the number of packetized serial communication frames that can be captured consecutively. Segmented memory does this by capturing just the selective frames/bytes of interest while ignoring (not digitizing) idle time and other unimportant frames/bytes. Figure 4 shows an example of the 3000 X-Series oscilloscope capturing 1,000 consecutive LIN serial bus frames qualified with a 21_{HEX} frame ID for a total acquisition time of over 30 seconds. Capturing this much data using conventional oscilloscope acquisition memory would be impossible.

Agilent’s InfiniiVision Series oscilloscopes are the only scopes on the market today that can acquire segments on up to four analog channels of acquisition, and time-correlated segments on digital channels (using an MSO model), along with automatic hardware-based serial bus decoding for each segment. In addition, you can use the scope’s Search & Navigation capability after a segmented memory acquisition has been performed.

Serial Bus Eye-diagram and Pulse Mask Testing

With the addition of the DSOX3MASK mask test option, which can perform over 200,000 pass/fail tests per second, you can perform eye-diagram and pulse mask testing on CAN, FlexRay, MIL-STD 1553, and ARINC 429 signals. Eye-diagram measurements provide a comprehensive signal quality test of the integrity of your transmitted and received signals. Agilent provides various mask files that you can download at no charge. The mask files are based on published industry mask standards and/or derived from physical layer/electrical specifications.

The following CAN mask files are available:

- 125 kbps – 400 meters
- 250 kbps – 200 meters
- 500 kbps – 10 meters
- 500 kbps – 80 meters
- 800 kbps – 40 meters
- 1000 kbps – 25 meters

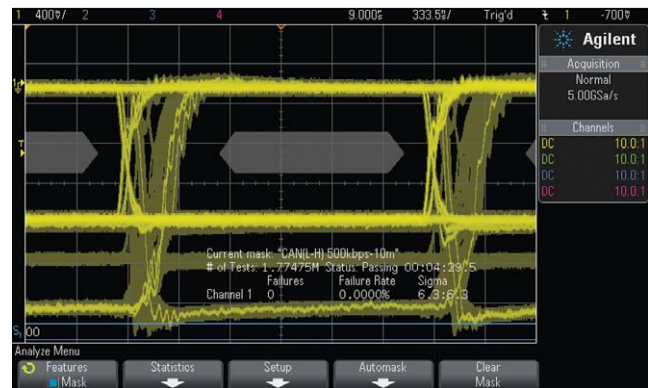


Figure 5: CAN 500 kbps mask test on 10 meter system

The following FlexRay mask test files are available:

- TP1 standard voltage (10 Mbps only)
- TP1 increased voltage (10 Mbps only)
- TP11 standard voltage (10 Mbps only)
- TP11 increased voltage (10 Mbps only)
- TP4 10 Mbps
- TP4 5 Mbps
- TP4 2.5 Mbps

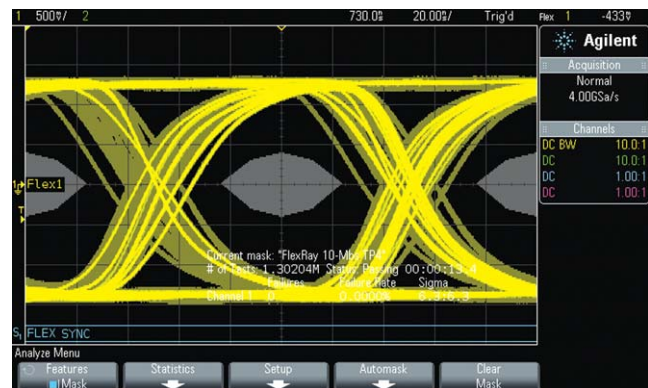


Figure 6: FlexRay TP4 eye-diagram mask test.

The following MIL-STD 1553 mask test files are available:

- System xfrm-coupled Input
- System direct-coupled Input
- BC xfrm-coupled Input
- BC direct-coupled Input
- RT xfrm-coupled Input
- RT direct-coupled Input

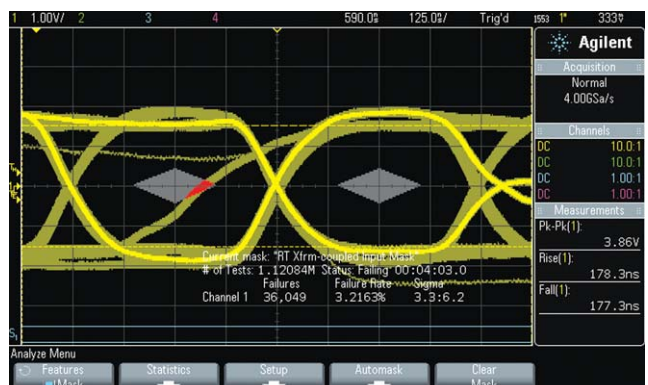


Figure 7: MIL-STD 1553 BC to RT xfrm-coupled input mask test reveals a shifted bit that violates the pass/fail mask.

The following ARINC 429 mask/pulse test files are available:

- 100 kbps Eye Test
- 100 kbps 1's Pulse Test
- 100 kbps 0's Pulse Test
- 100 kbps Null Level Test
- 12.5 kbps Eye Test
- 12.5 kbps 1's Pulse Test
- 12.5 kbps 0's Pulse Test
- 12.5 kbps Null Level Test

For additional information about eye-diagram mask testing on CAN, FlexRay, MIL-STD 1553, and ARINC 429 signals, refer to the application notes listed at the end of this document.

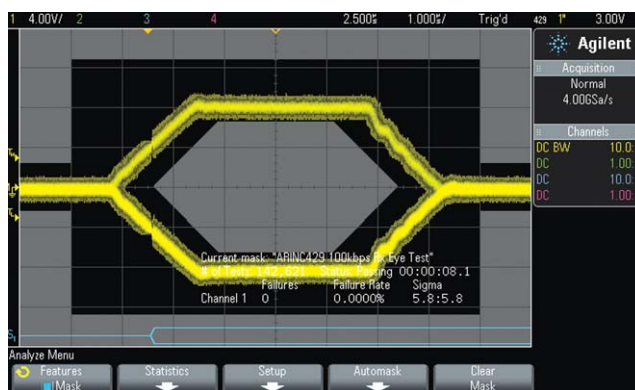


Figure 8: ARINC 429 100 kbps eye-diagram mask test.

Probing Differential Serial Buses

Some of today's serial buses are based on differential signaling, such as CAN, FlexRay, MIL-STD 1553, and ARINC 429. Probing differential serial buses such as these requires that you use a differential active probe. Agilent offers a range of differential active probes compatible with the InfiniiVision 3000 X-Series oscilloscopes for various bandwidth and dynamic range applications.

For CAN, MIL-STD 1553, and ARINC 429 differential bus applications, Agilent recommends the 25-MHz bandwidth N2791A differential active probe shown in Figure 9.

For both CAN and FlexRay applications, Agilent recommends the 200-MHz bandwidth N2792A differential active probe shown in Figure 10. Also available for FlexRay applications is the 800-MHz bandwidth N2793A differential active probe.

If you need to connect to DB9-SubD connectors on your differential CAN and/or FlexRay bus, Agilent also offers the CAN/FlexRay DB9 probe head (Part number 0960-2926). This differential probe head, which is shown in the insert of Figure 9, is compatible with both the N2791A and N2792A differential active probes and allows you to connect easily to your CAN and/or FlexRay differential bus.

If you already own a significant installed-base of Tektronix active probes, Agilent offers a Tek-to-Agilent probe adapter (N2744A). Agilent also offers a variety of higher bandwidth differential and single-ended active probes not shown here.




Figure 9: Agilent N2791A 25-MHz differential active probe.



Figure 10: Agilent N2792A 200-MHz differential active probe.


Specifications/Characteristics

I ² C specifications/characteristics (DSOX3EMBD)	
Clock and data input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15
Max clock/data rate	Up to 3.4 Mbps
Triggering	Start condition Stop condition Missing acknowledge Address with no acknowledge Restart EEPROM data read Frame (Start:Addr7:Read:Ack:Data) Frame (Start:Addr7:Write:Ack:Data) Frame (Start:Addr7:Read:Ack:Data:Ack:Data2) Frame (Start:Addr7:Write:Ack:Data:Ack:Data2) 10-bit write
Hardware-based decode	Data (HEX digits in white) Address decode size: 7 bits (excludes R/W bit) or 8 bits (includes R/W bit) Read address (HEX digits followed by "R" in yellow) Write address (HEX digits followed by "W" in light-blue) Restart addresses ("S" in green, followed by HEX digits, followed by "R" or "W") Acknowledges (suffixes "A" or "~A" in the same color as the data or address preceding it) Idle bus (mid-level bus trace in dark blue) Active bus (bi-level bus trace in dark blue) Unknown/error bus (bi-level bus trace in red)
Multi-bus analysis	I ² C plus one other serial bus (including another I ² C bus)

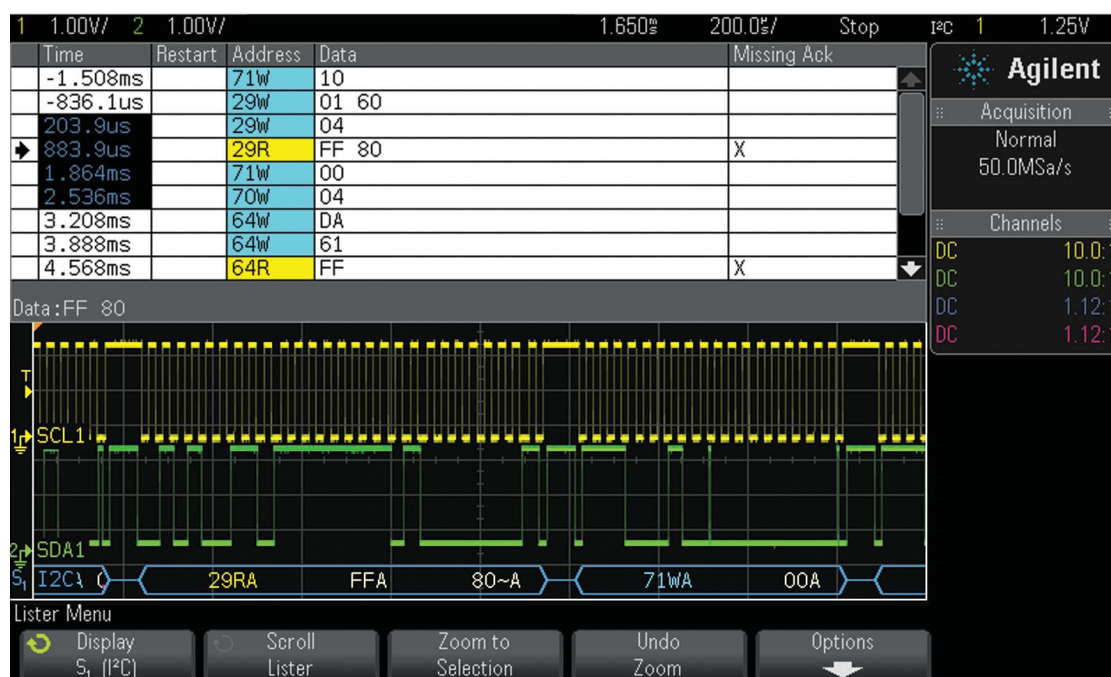


Specifications/Characteristics

SPI specifications/characteristics (DSOX3EMBD)	
MOSI, MISO, Clock, and CS input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15
Max clock/data rate	Up to 25 Mb/s
Triggering	4- to 64-bit data pattern during a user-specified framing period Framing period can be a positive or negative chip select (CS or ~CS) or clock idle time (timeout)
Hardware-based decode	Number of decode traces: 2 independent traces (MISO and MOSI) Data (hex digits in white) Unknown/error bus (bi-level bus trace in red) Number of clocks/packet ("XX CLKS" in light-blue above data packet) Idle bus (mid-level bus trace in dark blue) Active bus (bi-level bus trace in dark blue)
Multi-bus analysis	SPI plus one other serial bus (excluding another SPI bus)

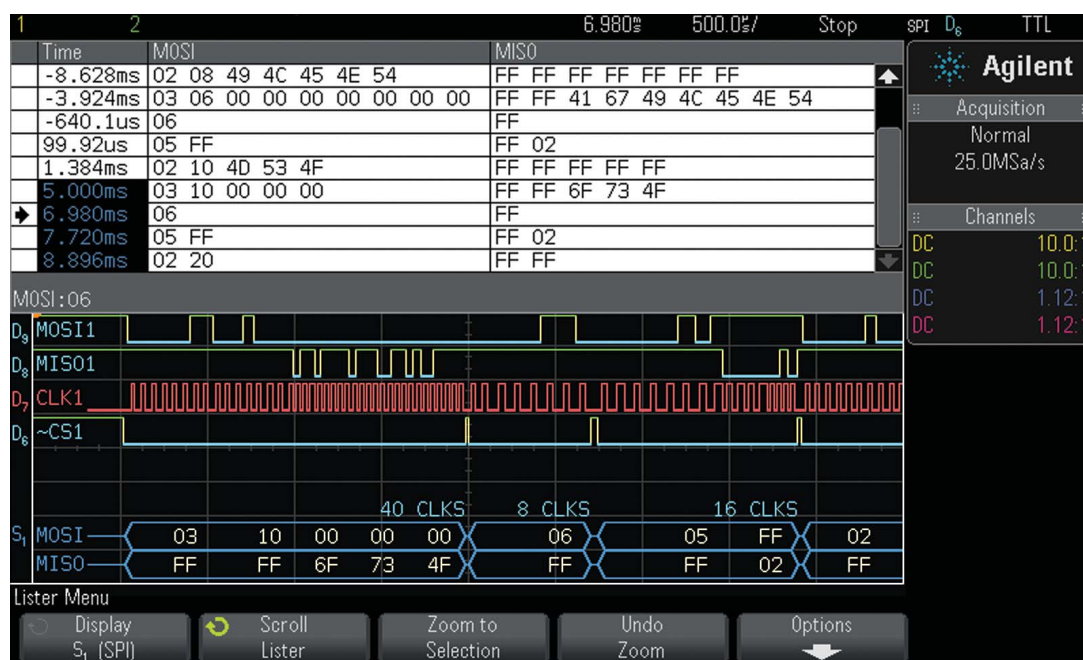


Specifications/Characteristics

RS232/UART specifications/characteristics (DSOX3COMP)	
Tx and Rx input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15
Bus configuration	
Baud rates	100 b/s up to 8 Mb/s
Number of bits	5 to 9
Parity	None, odd, or even
Polarity	Idle low or idle high
Bit order	LSB out first or MSB out first
Triggering	Rx start bit Rx stop bit Rx data Rx 1:data (9-bit format) Rx 0:data (9-bit format) Rx X:data (9-bit format) Rx or Tx parity error Tx start bit Tx stop bit Tx data Tx 1:data (9-bit format) Tx 0:data (9-bit format) Tx X:data (9-bit format) Burst (nth frame within burst defined by timeout)
Hardware-based decode	
Number of decode traces	2 independent traces (Tx and Rx)
Data format	Binary, hex, or ASCII-code characters
Data byte display	White characters if no parity error, red characters if parity or bus error
Idle bus trace	Mid-level bus trace in blue
Active bus trace	Bi-level trace in blue
Multi-bus analysis	RS232/UART plus one other serial bus (including another RS232/UART bus)
Totalize/counter function	Total received frames Total transmitted frames Total parity error frames (with percentage)

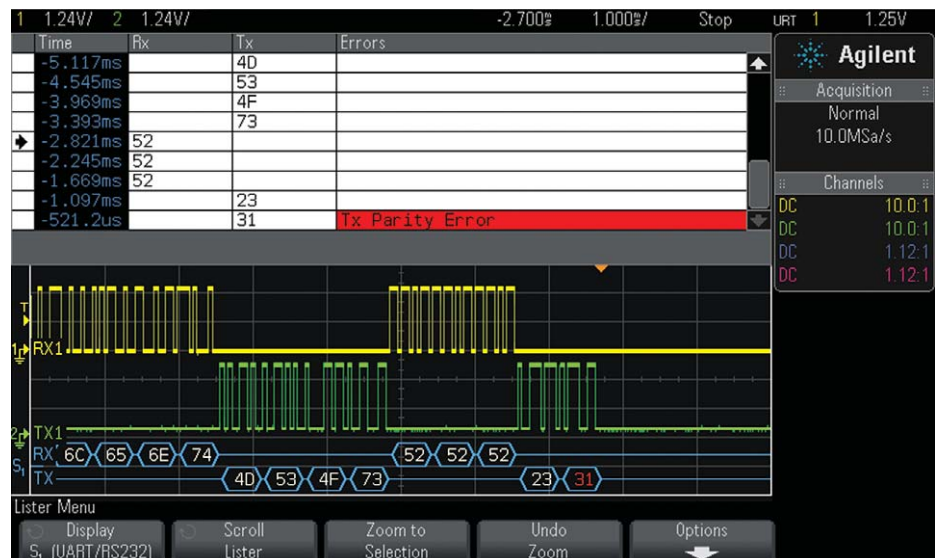


Specifications/Characteristics

CAN specifications/characteristics (DSOX3AUTO)	
CAN input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15 (non-differential)
Signal types	Rx Tx CAN_L CAN_H Diff (L-H) Diff (H-L)
Baud rates	10 kb/s up to 5 Mb/s
Triggering	Start-of-frame (SOF) Remote frame ID (RMT) Data frame ID (~RMT) Remote or data frame ID Data frame ID and data Error frame All errors (includes protocol “form” errors that may not generate flagged error frames) Acknowledge errors Overload frames ID length: 11 bits or 29 bits (extended)
Hardware-based decode	Frame ID (hex digits in yellow) Remote frame (RMT in green) Data length code (DLC in blue) Data bytes (hex digits in white) CRC (hex digits in blue = valid, hex digits in red = error) Error frame (bi-level bus trace and ERR message in red) Form error (bi-level bus trace and “?” in red) Overload frame (“OVRD” in blue) Idle bus (mid-level bus trace in dark blue) Active bus (bi-level bus trace in dark blue)
Multi-bus analysis	CAN plus one other serial bus (including another CAN bus)
Totalize function	Total frames, Total overload frames, Total error frames, Bus utilization (bus load)
Eye-diagram Mask Testing (requires DSOX3MASK)	Various downloadable mask files available based on differential probing polarity, baud rate, and network length

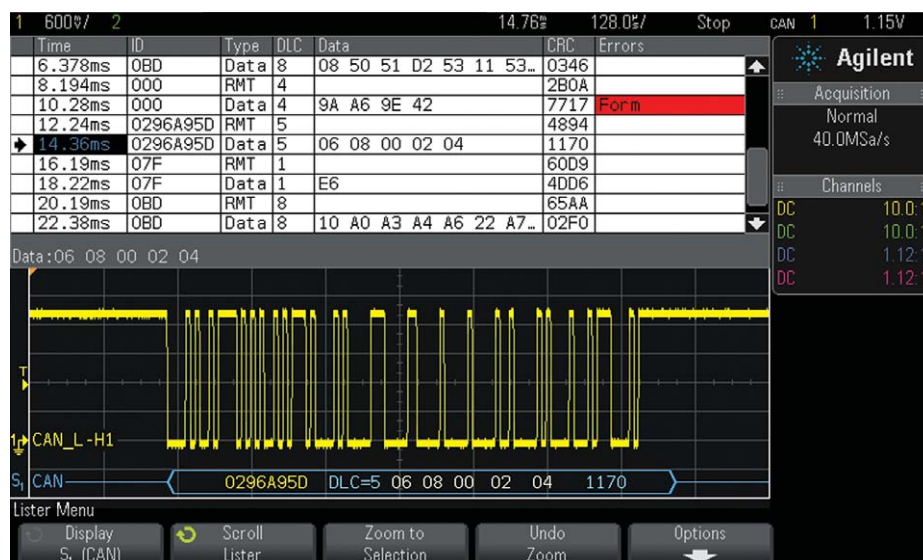


Specifications/Characteristics

LIN specifications/characteristics (DSOX3AUTO)	
LIN input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15
LIN standards	LIN 1.3 or LIN 2.0
Baud rates	2400 b/s to 625 kb/s
Triggering	Sync break Frame ID (0X00 _{HEX} to 0X3F _{HEX}) Frame ID and data
Hardware-based decode	Frame ID (6-bit hex digits in yellow) Frame ID and optional parity bits (8-bit hex digits in yellow if valid, red if parity bit error) Data bytes (hex digits in white) Lin 2.0 check sum (hex digits in white) Lin 1.3 check sum (hex digits in blue = valid, hex digits in red = error) Sync error ("SYNC" in red) THeader-max ("THM" in red) TFrame-max ("TFM" in red) Parity error ("PAR" in red) LIN 1.3 wake-up error ("WUP" in red) LIN 1.3 idle bus (mid-level bus trace in dark blue) LIN 2.0 idle bus (bi-level bus trace in dark blue) Active bus (bi-level bus trace in dark blue)
Multi-bus analysis	LIN plus one other serial bus (including another LIN bus)

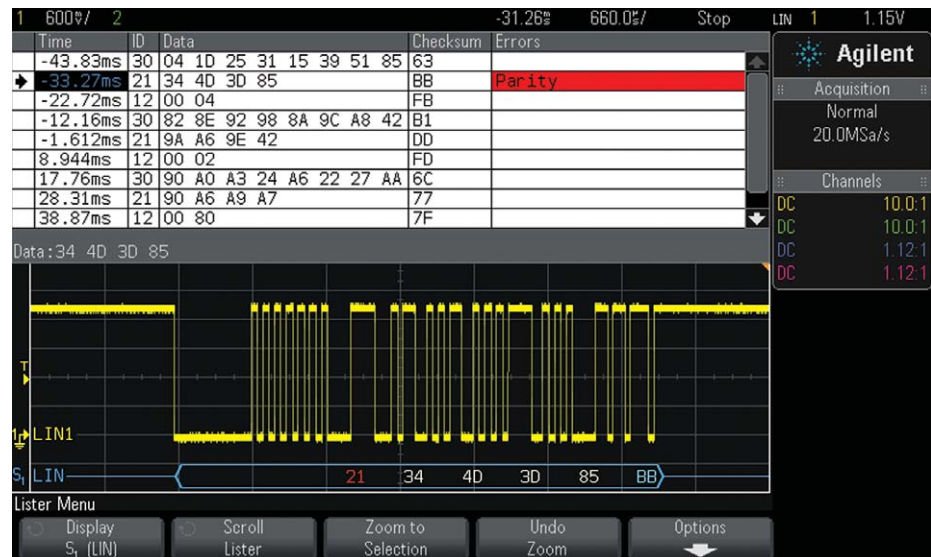


Specifications/Characteristics

FlexRay specifications/characteristics (DSOX3FLEX)	
FlexRay input source	Channel 1, 2, 3, or 4 (using differential probe)
FlexRay Channels	A or B
Baud rates	2.5 Mbps, 5.0 Mbps, and 10 Mbps
Frame triggering	- Frame type: startup (SUP), not startup (~SUP), sync (SYNC), not sync (~SYNC), null (NULL), not null (~NULL), normal (NORM), and All - Frame ID: 1 to 2047 (decimal format), and All - Cycle - - Base: 0 to 63 (decimal format), and All - Repetition: 1, 2, 4, 8, 16, 32, 64 (decimal format), and All
Error triggering	- All errors - Header CRC error - Frame CRC error
Event Triggering	- Wake-up - TSS (transmission start sequence) - BSS (byte start sequence) - FES/DTS (frame end or dynamic trailing sequence)
Frame decoding	- Frame type (NORM, SYNC, SUP, NULL in blue) - Frame ID (decimal digits in yellow) - Payload-length (decimal number of words in green) - Header CRC (hex digits in blue if valid, or red digits if invalid) - Cycle number (decimal digits in yellow) - Data bytes (HEX digits in white) - Frame CRC (hex digits in blue if valid, or red digits)
Totalize function	- Total frames - Total synchronization frames - Total null frames
Eye-diagram Mask Testing (requires DSOX3MASK mask test option plus downloadable mask files)	TP1 standard voltage (10 Mbps only) TP1 increased voltage (10 Mbps only) TP11 standard voltage (10 Mbps only) TP11 increased voltage (10 Mbps only) TP4 10 Mbps, TP4 5 Mbps and TP4 2.5 Mbps
Multi-bus Analysis	FlexRay plus one other serial bus (including another FlexRay bus)

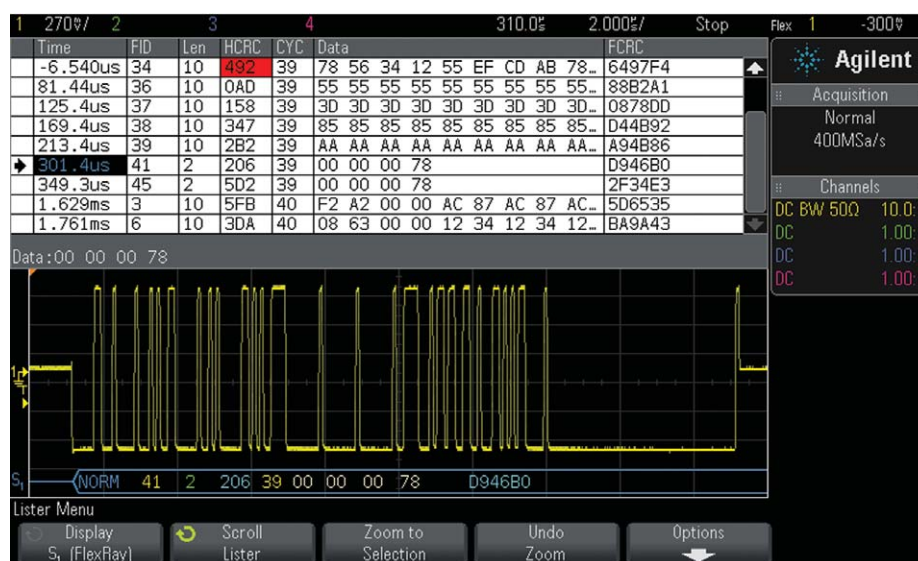


Specifications/Characteristics

I ² S specifications/characteristics (DSOX3AUDIO)	
SCLK, WS, and SDATA input source	Analog channels 1, 2, 3, or 4 Digital channels D0 to D15
Bus configuration:	
Transmitted word size	4 to 32 bits (user selectable)
Decoded/Receiver word size	4 to 32 bits (user selectable)
Alignment	Standard, left-justified, or right-justified
Word select - low	Left-channel or right-channel
SCLK slope	Rising edge or falling edge
Decoded base	Hex (2's complement) or signed decimal
Baud rates	2400 b/s to 625 kb/s
Triggering:	
Audio channel	Audio left, audio right, or either
Trigger modes	= (Equal to entered data value) ≠ (Not equal to entered data value) < (Less than entered data value) > (Greater than entered data value) >< (Within range of entered data values) <> (Out of range of entered data values) Increasing value that crosses armed (<=) and trigger (>=) entered data values Decreasing value that crosses armed (>=) and trigger (<=) entered data values
Hardware-based decode:	
Left channel	L: "decoded value" in white
Right channel	R: "decoded value" in green
Error	ERR in red (mismatch between transmitted and received word size, or invalid input signaling)
Word size indicator	"# of TX / # of RX" CLKS in blue displayed above each decoded word
Multi-bus analysis	I ² S plus one other serial bus (excluding another I ² S bus)

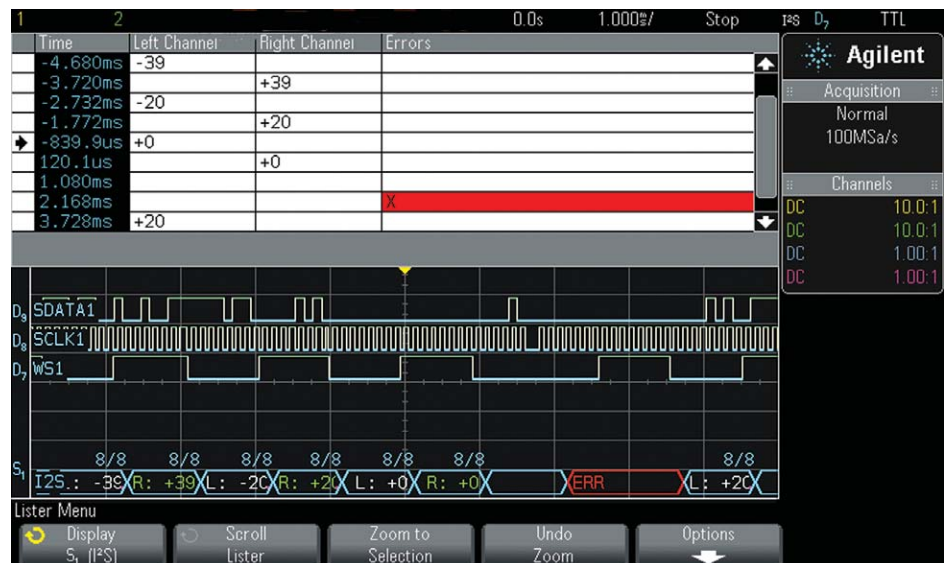

Specifications/Characteristics


MIL-STD 1553 specifications/characteristics (DSOX3AERO)	
MIL-Std 1553 Input Source	Analog channels 1, 2, 3, or 4 (using a differential active probe)
Triggering	• Data Word Start • Data Word Stop • Command/Status Word Start • Command/Status Word Stop • Remote Terminal Address (hex) • Remote Terminal Address (hex) + 11 Bits (binary) • Parity Error • Sync Error • Manchester Error
Color-coded, hardware-accelerated decode	• Base: HEX or Binary • Command or Status Word ("C/S" in green) • Remote Terminal Address (hex or binary digits in green) • 11 Bits following RTA (hex or binary digits in green) • Data Word ("D" in white) • Data Word Bits (hex or binary digits in white) • Parity Error (all decoded text in red) • Synchronization Error ("Sync" in red) • Manchester Error ("Manch" in red)
Eye-diagram Mask Testing (requires DSOX3MASK mask test option plus downloadable mask files)	• System xfmr-coupled Input • System direct-coupled Input • BC xfmr-coupled Input • BC direct-coupled Input • RT xfmr-coupled Input • RT xfmr-coupled Input
Multi-bus Analysis	MIL-STD 1553 plus one other serial bus, (including another MIL-STD 1553 bus)

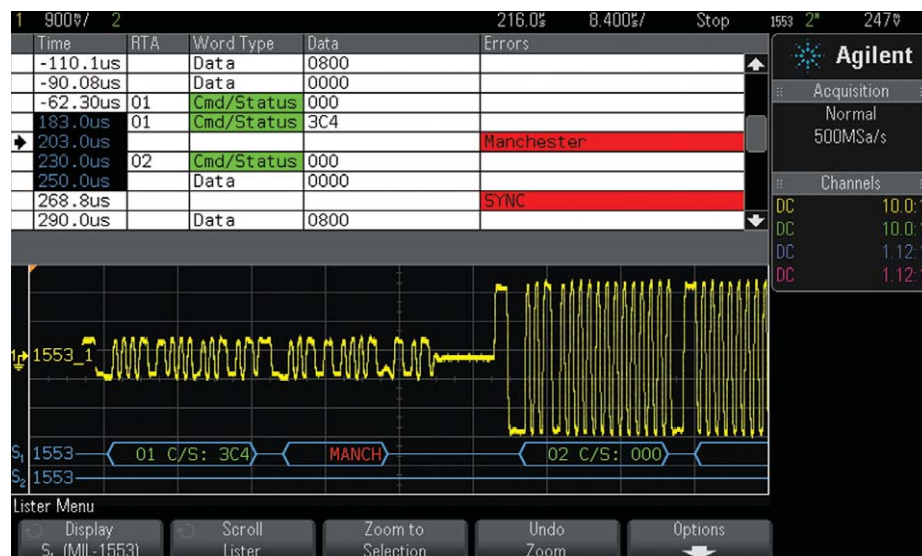

Specifications/Characteristics

ARINC 429 specifications/characteristics (DSOX3AERO)

ARINC 429 Input Source	Analog channels 1, 2, 3, or 4 (using a differential active probe)
Baud Rates	High (100 kbps) Low (12.5 kbps)
Triggering	Word Start Word Stop Label (octal) Label (octal) + Bits (binary) Label Range (octal) Parity Error Word Error Gap Error Word or Gap Error All Errors All Bits (useful for eye-diagram testing) All 0 Bits All 1 Bits
Color-coded, hardware-accelerated decode	Word Format: Label/SDI/Data/SSM or Label/Data/SSM or Label/Data Label (octal digits in yellow) SDI (binary digits in blue) Data (hex or binary digits in white) SSM (binary digits in green) Errors (text in red)
Totalize function	Total Words Total Errors
Eye-diagram and Pulse Mask Testing (requires DSOX3MASK plus downloadable mask files)	100 kbps Eye Test 100 kbps 1's Test 100 kbps 0's Test 100 kbps Null Test 12.5 kbps Eye Test 12.5 kbps 1's Test 12.5 kbps 0's Test 12.5 kbps Null Test
Multi-bus Analysis	ARINC 429 plus one other bus (including another ARINC 429 bus)

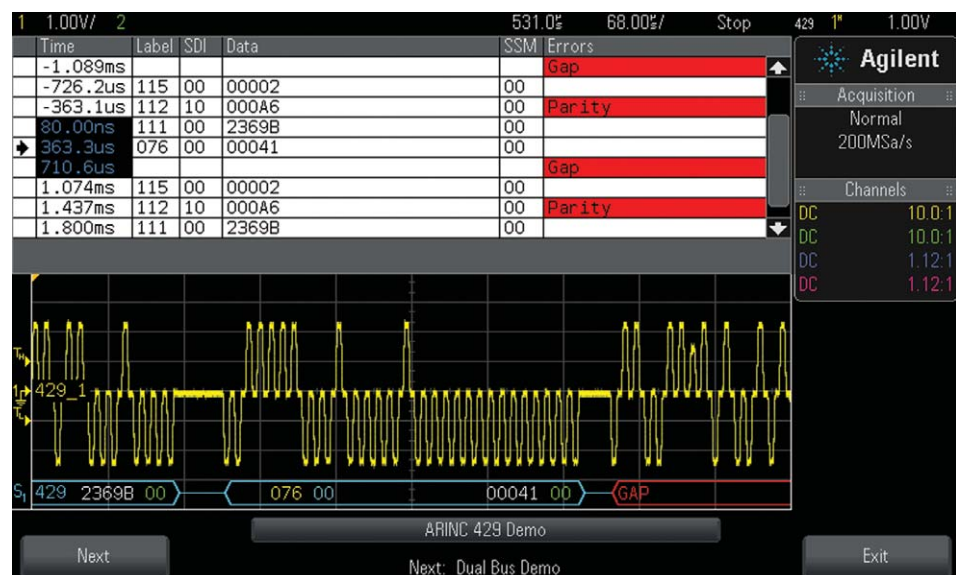

Ordering Information

The various serial bus options are compatible on all models of the Agilent InfiniiVision 3000 X-Series oscilloscopes. Existing InfiniiVision 3000 X-Series oscilloscopes can also be upgraded with these options.

Model number	Description
DSOX3EMBD	I ² C and SPI trigger and decode
DSOX3COMP	RS232/UART trigger and decode
DSOX3AUTO	CAN and LIN trigger and decode
DSOX3FLEX	FlexRay trigger and decode
DSOX3AERO	MIL-STD 1553 and ARINC 429 trigger and decode
DSOX3AUDIO	I ² S trigger and decode
DSOX3SGM	Segmented memory
DSOX3MASK	Mask test option
DSOX3ADMATH	Advanced waveform math
DSOX3PWR	Power measurements
DSOX3DVM	Integrated 3-digit voltmeter
DSOX3VID	HDTV triggering and analysis
DSOX3MEMUP	Acquisition memory upgrade
N2791A	25-MHz differential active probe (recommended for CAN, MIL-STD 1553, and ARINC 429 applications)
N2792A	200-MHz differential active probe (recommended for FlexRay applications)
N2793A	800-MHz differential active probe (recommended for FlexRay applications)
0960-2926	DB9 probe head adapter for N2791A and N2792A
0960-2927	DB9 probe head adapter for N2793

Additional options and accessories are available for Agilent's InfiniiVision 2000 and 3000 X-Series oscilloscopes. Refer to the *Agilent InfiniiVision Oscilloscope Probes and Accessories* selection guide or 2000 X-Series or 3000 X-Series data sheets for ordering information about these additional options and accessories.

Related Agilent literature

Publication Title	Publication Type	Publication Number
<i>Agilent InfiniiVision 2000 X-Series Oscilloscopes</i>	Data Sheet	5990-6618EN
<i>Agilent InfiniiVision 3000 X-Series Oscilloscope</i>	Data Sheet	5990-6619EN
<i>Agilent Technologies InfiniiVision Series Oscilloscope Probes and Accessories</i>	Selection Guide	5968-8153EN
<i>Evaluating Oscilloscope Segmented Memory for Serial Bus Applications</i>	Application Note	5990-5817EN
<i>CAN Eye-diagram Mask Testing</i>	Application Note	5991-0484EN
<i>FlexRay Eye-diagram Mask Testing</i>	Application Note	5990-4923EN
<i>MIL-STD 1553 Eye-diagram Mask Testing</i>	Application Note	5990-9324EN
<i>ARINC 429 Eye-diagram Mask Testing</i>	Application Note	5990-9325EN

To download these documents, insert the publication number in the URL:
<http://cp.literature.agilent.com/litweb/pdf/xxxx-xxxxEN.pdf>

Product Web site

For the most up-to-date and complete application and product information, please visit our product Web site at:
www.agilent.com/find/3000X-Series



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

www.agilent.com/find/advantageservices



Windows® is a U.S. registered trademark of Microsoft Corporation.

www.agilent.com

www.agilent.com/find/3000X-Series

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

www.agilent.com/find/contactus

Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012

Published in USA, May 24, 2012

5990-6677EN



Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications



Agilent Technologies