

# Agilent 89640A dc–2700 MHz Vector Signal Analyzer

## Data Sheet

Specifications describe warranted performance over a temperature range from 20 to 30° C, and include a 30-minute warm-up from ambient conditions. Parameters identified as “typical” or “characteristic” are included for informational purposes only, and are non-warranted.

Except where noted, these specifications also apply to the Agilent 89600S RF vector signal analyzer systems, provided that all components meet their individual specifications, and that the system has been configured and assembled in accordance with the 89600S Configuration Guide and all other applicable documents.

Operation of the 89600 series vector signal analyzers requires a personal computer meeting at least the following requirements:

Minimum requirements for a user-supplied desktop PC:

- 180 MHz Pentium, or AMD-K6, CPU (≥300 MHz CPU recommended)
- One empty PCI-bus slot (2 slots recommended)
- 192 MB RAM (256 MB recommended)

- 4 MB video RAM (8 MB recommended)
- Hard disk with 100 MB available space
- Microsoft® Windows NT® 4.0 (Service Pack 5 or greater required) or Windows® 2000
- CD-ROM drive (can be provided via network access)
- 3.5-inch floppy disk drive (can be provided via network access) (RF analyzers only)

Minimum requirements for a user-supplied laptop PC:

- >300 MHz Pentium, or AMD-K6, CPU
- One empty CardBus Type II slot (2 slots recommended)
- 192 MB RAM (256 MB recommended)
- 4 MB video RAM (8 MB recommended)
- Hard disk with 100 MB available space
- Microsoft Windows 2000
- CD-ROM drive (can be provided via network access)
- 3.5-inch floppy disk drive (can be provided via network access)
- Supported IEEE-1394-1995 interface

For a list of supported interfaces, go to [www.agilent.com/find/iolib](http://www.agilent.com/find/iolib) or contact your local Test and Measurement Call Center or sales office.

May not be available in all areas worldwide.

### Definitions

dBc: dB relative to largest input signal.

dBfs: dB relative to full scale amplitude range setting. Full scale is approximately 10 dB below ADC overload.

FS or fs: Full scale; synonymous with amplitude range or input range.

RBW: Resolution bandwidth.



**Agilent Technologies**

## Frequency

The Agilent 89640A consists of two separate applications for Microsoft Windows NT or Windows 2000. The 89600 series vector signal analyzer (VSA) performs vector analysis of complex signals in the time, frequency and modulation domains. The 89600 VSA emulates a traditional spectrum analyzer, providing fast, high-resolution signal magnitude measurements while sweeping across a user-defined frequency span.

### Frequency tuning

#### Frequency range

Band 1	36 <sup>1</sup> to 2700 MHz
Band 2	dc to 36 <sup>2</sup> MHz

#### Frequency spans

Spectrum analyzer application	<1 kHz to 2700 MHz
Vector signal analyzer application	<1 Hz to 36 <sup>2</sup> MHz

<b>Center frequency tuning resolution</b>	1 mHz
---	-------

#### Frequency points per span

Spectrum analyzer application	2–131,072 pts
Vector signal analyzer application	
Calibrated points	51–102,401 pts
Displayable points	51–131,072 pts

### Frequency accuracy

Frequency accuracy is the sum of initial accuracy, aging and temperature drift (ppb = parts per billion).

<b>Initial accuracy</b>	100 ppb
-------------------------	---------

<b>Aging</b>	1 ppb/day 100 ppb/year
--------------	---------------------------

<b>Temperature drift, 0–50° C</b>	50 ppb
-----------------------------------	--------

### Frequency stability (spectral purity)

#### Phase noise, 10 MHz input<sup>3</sup>

100 Hz Offset	<–108 dBc/Hz
1 kHz Offset	<–118 dBc/Hz
>10 kHz Offset	<–120 dBc/Hz

#### Phase noise, 1 GHz input<sup>3</sup>

>20 kHz Offset	<–99 dBc/Hz
>100 kHz Offset	<–110 dBc/Hz

### Resolution bandwidth

#### Range

Spectrum analyzer application	1 Hz to >5 MHz
Vector signal analyzer application	<1 Hz to 10 MHz

The range of available RBW choices is a function of the selected frequency span and the number of calculated frequency points. Users may step through the available range in a 1-3-10 sequence, or directly enter an arbitrarily-chosen bandwidth.

<sup>1</sup> In the vector signal analyzer application, 36 MHz is the minimum center frequency. With appropriate choice of frequency span, actual frequency coverage extends down to 20 MHz.

<sup>2</sup> Overrange provided to 37.11 MHz

<sup>3</sup> Specified for systems using Agilent E8408B VXI mainframe with options 001 and 918; for other mainframes, figures shown are typical.

## Amplitude

Except as noted, specifications apply within the following frequency ranges:

Vector signal analyzer application

Band 1 20–2700 MHz

Band 2 0–36 MHz

Spectrum analyzer application

Band 1 36–2700 MHz

Band 2 0–36 MHz

### RBW shape factor

The window choices below allow the user to optimize the RBW shape as needed for best amplitude accuracy, best dynamic range, or best response to transient signal characteristics.

Window	Selectivity (3:60 dB)	Passband flatness	Rejection
Flat top	0.41	0.01 dB	>95 dBc
Gaussian-top	0.25	0.68 dB	>125 dBc
Hanning	0.11	1.5 dB	>31 dBc
Uniform	0.0014	4.0 dB	>13 dBc

### Input range

#### Full-scale range

Band 1 –45 dBm to +20 dBm in 5 dB steps

Band 2 –30 dBm to +20 dBm in 5 dB steps

**Maximum safe input level** +20 dBm,  $\pm 5$  VDC

**ADC overload (typical) Band 1, 2** +10 dBfs

### Input ports

**Nominal impedance** 50 $\Omega$

**Connector** Type N

#### VSWR (return loss)

Band 1 (–20 dBm to +20 dBm ranges) 1.8:1 (10.7 dB)

Band 1 (–45 dBm to –25 dBm ranges) 2.5:1 (7.3 dB)

Band 2 (all ranges) 1.5:1 (14 dB)

### Amplitude accuracy

Accuracy specifications apply with flat-top window selected. Amplitude accuracy is the sum of absolute full-scale accuracy and amplitude linearity.

#### Absolute full-scale accuracy

##### Band 1

20–30° C  $\pm 2$  dB

0–50° C (typical)  $\pm 2$  dB

##### Band 2

0–50° C  $\pm 0.8$  dB

#### Amplitude linearity

0 to –30 dBfs  $\pm 0.10$  dB

–30 to –50 dBfs  $\pm 0.15$  dB

–50 to –70 dBfs  $\pm 0.20$  dB

### Flatness

Frequency response across the measurement span in vector signal analysis mode (included in amplitude accuracy specifications).

**Bands 1, 2 (typical)**  $\pm 0.2$  dB

## Phase (vector signal analyzer)

---

### Dynamic range

Dynamic range indicates the amplitude range that is free of erroneous signals within the measurement bandwidth.

---

### Intermodulation distortion

(two input signals, each  $-6$  dBfs to  $-10$  dBfs, separation  $>1$  MHz. Specified relative to either signal)

Third-order, bands 1 and 2	$<-70$ dBc
Second-order, band 1	$-55$ dBc (typical)
Second-order, band 2 ( $<30$ MHz)	$<-70$ dBc

---

### Harmonic distortion

(single input signal,  $0$  to  $-10$  dBfs)

Band 1	$-55$ dBc (typical)
Band 2	$<-70$ dBc

### Spurious responses

(full-scale input signal within analyzer frequency range)<sup>4</sup>

Bands 1, 2	$<-70$ dBc
------------	------------

---

### Spurious sidebands

(full-scale input signal)<sup>5</sup>

Band 1 ( $>1$ kHz offset)	$<-65$ dBc
Band 1 ( $>3$ kHz offset)	$<-70$ dBc
Band 2 ( $>1$ kHz offset)	$<-70$ dBc

---

### Residual responses

(input port terminated and shielded,  $>10$  kHz)

Bands 1, 2 maximum of:	$-77$ dBfs or $-100$ dBm
------------------------	--------------------------

---

### Input noise density (range $\geq -30$ dBm)

Band 1 ( $<1.2$ GHz)	$<-116$ dBfs/Hz
Band 1 ( $>1.2$ GHz)	$<-114$ dBfs/Hz
Band 2 ( $>0.1$ MHz)	$<-122$ dBfs/Hz

---

### Sensitivity

(most sensitive range)

Band 1 ( $<1.2$ GHz)	$<-158$ dBm/Hz
Band 1 ( $>1.2$ GHz)	$<-157$ dBm/Hz
Band 2	$<-152$ dBm/Hz

---

### Linearity

Group delay deviation across maximum measurement span, using flat-top window.

Band 1 (typical)	$\pm 8$ ns
Band 2 (typical)	$\pm 2$ ns

<sup>4</sup> Specification reduced by approximately 10 dB for out of band input signals in the frequency range from 26 to 44 MHz above the analyzer's center frequency.

<sup>5</sup> Specified for systems using Agilent E8408B VXI mainframes with options 001 and 918; for other mainframes, figures shown are typical.

**Time and waveform**  
(vector signal analyzer)

---

**Baseband versus zoom measurements**

These two signal processing modes affect the appearance and the duration of input waveforms as they are captured and displayed on the 89600 VSAs.

Most 89600 measurements are made with a non-zero start frequency, also called the *zoom* mode. In these cases, the time domain display shows a complex envelope representation of the input signal – that is, the magnitude and phase of the signal relative to the analyzer’s center frequency. This provides powerful capability to examine the baseband components of a signal without the need to first demodulate it.

*Baseband* mode refers to the special case where the measurement span begins at 0 Hz. Here, the input signal is directly digitized, and the waveform display shows the entire signal (carrier plus modulation), very much as an oscilloscope would.

---

**Waveform accuracy**

See “Amplitude accuracy”

---

**Time record characteristics**

In the 89600 VSA application, measurements are based on time records. For example, blocks of waveform samples from which time, frequency and modulation domain data is derived. Time records have these characteristics:

<b>Time record length</b>	= (number of frequency points – 1)/span, with RBW mode set to arbitrary, auto-coupled.
<b>Time sample resolution</b>	= 1/(k x span), where k = 2.56 for time data = baseband, and k = 1.28 for time data = zoom.

**Time capture characteristics**

In time capture mode, the 89600 VSA captures the incoming waveform in real time (i.e. gap-free) into high-speed time capture memory. This data may then be replayed through the analyzer at full or reduced speed, saved to mass storage, or transferred to another software application.

When post-analyzing the captured waveform, users may adjust measurement span and center frequency in order to zoom in on specific signals of interest, as long as the new measurement span lies entirely within the originally captured span.

**Time capture memory size** (zoom mode).  
For baseband mode increase values by 2x.

	Bytes	Samples <sup>6</sup>	Samples <sup>7</sup>
Standard	18 M	6 M	3 M
Option 144	144 M	48 M	24 M
Option 288	288 M	96 M	48 M


**Time capture length** = memory samples x time sample resolution

**Time sample resolution** = 1/(k x cardinal span)  
where k = 2.56 for time data = baseband,  
and k = 1.28 for time data = zoom,

Cardinal frequency spans are those related to the maximum span by integer powers of two, for example = 37.109375 MHz / 2<sup>n</sup>

During time capture, the analyzer is internally set to the next highest cardinal span that equals or exceeds the currently displayed frequency span.

**Time capture length versus span**

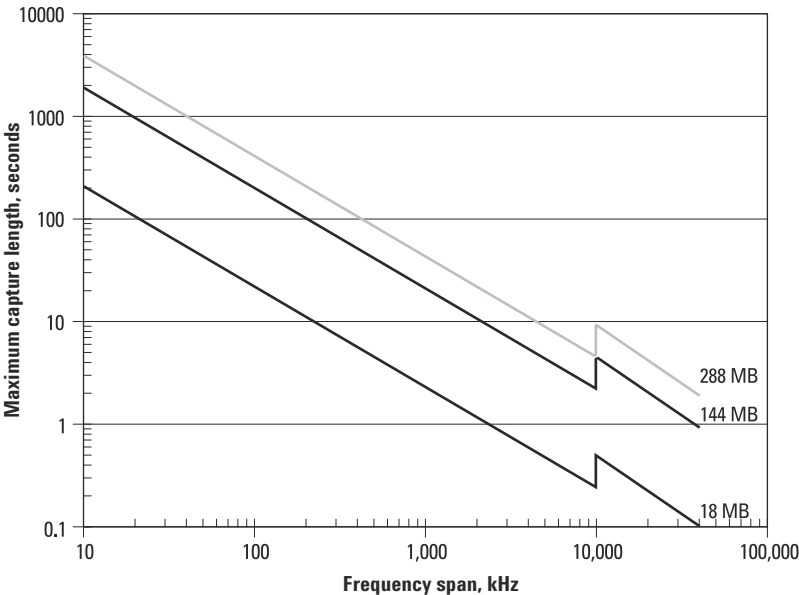

<sup>6</sup> Frequency spans >18.56 MHz

<sup>7</sup> Frequency spans <18.56 MHz

## Measurement, display and control

<b>Triggering</b>	
<b>Trigger types</b>	
Spectrum analyzer application	Free run, channel, external (separate trigger per frequency segment)
Vector signal analyzer application	Free run, channel, IF magnitude, external
Pre-trigger delay resolution	Same as time capture sample resolution
Pre-trigger delay range	Same as time capture length
Post-trigger delay resolution	Same as time capture sample resolution
Post-trigger delay range	0 to $2^{30} - 1$ time samples <sup>8</sup>
<b>IF trigger</b>	
Used to trigger on in-band energy, where the trigger bandwidth is determined by the measurement span (rounded to the next higher cardinal span).	
Amplitude resolution	<0.5 dB
Amplitude ranges	>3 dBfs to <-70 dBfs. Useable range is limited by the total integrated noise in the measurement span.
IF trigger hysteresis	1.5 dB
<b>Trigger hold-off</b>	
Used to improve trigger repeatability on TDMA and other bursted signals. Trigger hold-off prevents re-triggering of the analyzer until a full hold-off period has elapsed with no signals above the trigger threshold.	
Hold-off resolution	Same as time capture sample resolution
Hold-off range	0 to $2^{24} - 1$ time samples <sup>8</sup>
<b>External trigger</b>	
Works with analog and TTL signals.	
Type	ac-coupled comparator
Minimum pulse width	>300 ns
Minimum pulse amplitude	>100 mV
Slope	Positive, negative
Input impedance	1 k $\Omega$
<b>Averaging</b>	
<b>Number of averages, maximum</b>	>10 <sup>8</sup>
<b>Overlap averaging</b>	0% to 99.99%
<b>Average types</b>	
Spectrum analyzer application	rms (video), rms (video) exponential, peak hold
Vector signal analyzer application	rms (video), rms (video) exponential, peak hold, time, time exponential

<sup>8</sup> Time sample length is a function of measurement span, as described under "Time and waveform" specifications. In actual operation, trigger parameters are set and displayed in time units (seconds).

<b>Analog demodulation</b>	
<b>Demodulation types</b>	AM, PM, FM, with auto carrier locking provided for PM or FM
<b>Demodulator bandwidth</b>	Same as selected measurement span
<b>AM demodulation (typical)</b>	
Accuracy	±1%
Dynamic range	60 dB (100%) for a pure AM signal
Cross demodulation	< 0.3% AM on an FM signal with 10 kHz modulation, 200 kHz deviation
<b>PM demodulation (typical)</b>	
Accuracy	±3 degrees
Dynamic range	60 dB (rad) for a pure PM signal
Cross demodulation	< 1 degree PM on an 80% AM signal
<b>FM demodulation (typical)</b>	
Accuracy	±1% of span
Dynamic range	60 dB (Hz) for a pure FM signal
Cross demodulation	< 0.5% of span FM on an 80% AM signal
<b>Time gating</b>	
Provides time-selective frequency-domain analysis on any input or analog demodulated time-domain data. When gating is enabled, markers appear on the time data; gate position and length can be set directly. Independent gate delays can be set for each input channel. See time specifications for main time length and time resolution details.	
<b>Gate length, maximum</b>	Main time length
<b>Gate length, minimum</b>	= window shape / (0.3 x freq. span) where window shape is equal to:
	Flat-top window 3.8
	Gaussian-top window 2.2
	Hanning window 1.5
	Uniform window 1.0
<b>Marker functions</b>	
Peak signal track, frequency counter, band power	
<b>Band power markers</b>	
Markers can be placed on any time, frequency, or demodulated trace for direct computation of band power, rms square root (of power), C/N or C/No, computed within the selected portion of the data.	
<b>Trace math</b>	
Trace math can be used to manipulate data on each measurement. Applications include user-defined measurement units, data correction and normalization.	
<b>Operands</b>	Measurement data, data register, constants, jw
<b>Operations</b>	+, −, x, /, conjugate, magnitude, phase, real, imaginary, square, square root, FFT, inverse FFT, windowing, logarithm, exponential, peak value, reciprocal, phase unwrap, zero



## Display formats

Trace Data	Vector signal analysis (demodulation OFF)	Vector signal analysis (analog demodulation)	Vector modulation analysis (option AYA)	W-CDMA and cdma2000 modulation analysis (option B7N)
Autocorrelation	•	•		
Complementary cumulative distribution function	•	•		
Cumulative distribution function	•	•		
Channel frequency response			•	
Code domain error				•
Code domain power				•
Composite errors				•
Correction	•	•	•	
Error vector spectrum			•	•
Error vector time			•	•
Equalizer impulse response			•	
Gate time	•	•		
Instantaneous main time	•	•		
Instantaneous spectrum	•	•	•	
IQ mag error			•	•
IQ measurement spectrum			•	•
IQ measurement time			•	•
IQ phase error			•	•
IQ reference spectrum			•	•
IQ reference time			•	•
Main time	•	•		
Probability density function	•	•		
Power spectral density	•	•		
Search time			•	
Spectrum	•	•	•	•
Symbols/errors			•	•
Time			•	•

<b>Trace formats</b>	Log mag (dB or linear), linear mag, real(I), imag(Q), wrap phase, unwrap phase, I-Q, constellation, Q-eye, I-eye, trellis-eye, group delay
<b>Trace layouts</b>	1–4 traces on one, two or four grids
<b>Number of colors</b>	User-definable palette
<b>Spectrogram display</b>	
Types	Color – normal and reversed Monochrome – normal and reversed User colormap – 1 total
Adjustable parameters	Number of colors Enhancement (color-amplitude weighting) Threshold
Trace select	When a measurement is paused any trace in the trace buffer can be selected by trace number. The marker values and marker functions apply to selected trace.
Z-axis value	The z-axis value is the time the trace data was acquired relative to the start of the measurement. The z-axis value of the selected trace is displayed as part of the marker readout.
Memory (characteristic)	Displays occupy memory at a rate of 128 traces/Mbyte (for traces of 401 frequency points).

## Software interface

The 89600 VSA appears to other Windows software as an ActiveX object. Implemented according to the industry-standard Component Object Model (COM), the software exposes a rich object model of properties, events and methods, as fully described in the 89600 documentation.

Because all 89600 functionality is implemented within its software, direct programmatic access to the measurement front-end hardware is never necessary, and is not supported. Software development environments that are capable of interacting with COM objects include Agilent VEE, Microsoft Visual Basic, Microsoft Visual C++, MATLAB®, National Instruments LabView and others.

In addition, many end-user applications are able to interact directly with COM objects, using built-in macro languages such as Visual Basic for Applications (VBA). For example, in Microsoft Excel, a VBA macro could be used to set up the instrument, collect the measurement data, and automatically graph the results.

---

### Macro language

The analyzer's built-in Visual Basic Script interpreter allows many types of measurement and analysis tasks to be easily automated. Scripts may be developed using any text editor, or may be recorded automatically from a sequence of menu selections. Completed scripts may be named and integrated onto the analyzer's toolbar, allowing them to be launched with a single button press.

---

### Remote displays

To operate the 89600 or view its displays from a remote location, the use of commercially-available remote PC software such as Microsoft NetMeeting or Symantec PCAnywhere is recommended.

---

### Remote programming

Beginning with Microsoft Windows NT 4.0, COM objects on one PC are accessible from software running on another PC. This capability, known as Distributed COM (DCOM), makes the 89600 object model fully programmable from any other PC having network connectivity to the analyzer's host PC.

---

### File formats

For storage and recall of measured or captured waveforms, spectra and other measurement results:

ASCII	tab-delimited (.txt), comma-delimited (.csv)
Binary	Agilent standard data format (.sdf, .cap, .dat)
Binary	Agilent E3238 time snapshot (.cap) and time recording (.cap) files under 2 GBytes in size. No additional calibration
MATLAB 5	MAT-file (.mat)
MATLAB 4 and prior	MAT-file (.mat)

---

### Source

In source mode the 89600A VSA can control a signal generator via GPIB or LAN. Control is provided via the VSA GUI. Frequency and level control of CW signals is provided. Arbitrary signals may be downloaded from the time capture memory to the signal generator for replay. The same time record may be played over and over contiguously. A window function can be applied to smooth start-up and finish of replay.

Compatible sources	ESG-D or ESG-DP (firmware version B.03.50 or later), with the option UND internal dual arbitrary waveform generator (firmware version 1.2.92 or later)
Signal types	CW (fixed frequency sinewave) Arbitrary
Frequency range	Determined by signal generator
Level range	−136 dBm to 20 dBm in 0.02 dBm steps

For all other specifications see the technical data sheet for the signal generator used.

## Option AYA

### Vector modulation analysis

<b>Signal acquisition</b>	
Note: Signal acquisition does not require an external carrier or symbol clock	
<b>Data block length</b>	Adjustable to 4096 symbols.
<b>Samples per symbol</b>	1–20
<b>Symbol clock</b>	Internally generated
<b>Carrier lock</b>	Internally locked
<b>Triggering</b>	Single/continuous, external, pulse search (searches data block for beginning of TDMA burst, and performs analysis over selected burst length)
<b>Data synchronization</b>	User-selected synchronization words
<b>Supported modulation formats</b>	
<b>Carrier types</b>	Continuous and pulsed/burst (such as TDMA)
<b>Modulation formats</b>	<p>2, 4, 8 and 16 level FSK (including GFSK)</p> <p>MSK (including GMSK)</p> <p>QAM implementations of: BPSK, QPSK, OQPSK, DQPSK, <math>\pi/4</math>DQPSK, 8PSK, <math>\frac{3\pi}{8}</math> 8PSK (EDGE)</p> <p>16QAM, 32QAM, 64QAM, 256QAM (absolute encoding)</p> <p>16QAM, 32QAM, 64QAM (differential encoding per DVB standard)</p> <p>8VSB, 16VSB</p>
<b>Single-button presets for</b>	NADC, PDC, GSM, PHP(PHS), DECT, CDPD, TETRA, APC025, CDMA Base, CDMA Mobile, DVB16, DVB32, DVB64, DTV8, DTV16, EDGE, Bluetooth™, 802.11B, Hiperlan (HBR), Hiperlan (LBR), W-CDMA
<b>Filtering</b>	
<b>Filter types</b>	Raised cosine, square-root raised cosine, IS-95 compatible, Gaussian, EDGE, low pass, rectangular, none
<b>Filter length</b>	<p>40 symbols: VSB; QAM and DVB-QAM where <math>\alpha &lt; 0.2</math></p> <p>20 symbols: all others</p>
<b>User-selectable alpha/BT</b>	Continuously adjustable from 0.05 to 10
<b>User-defined filters</b>	<p>User-defined impulse response, fixed 20 points/symbol</p> <p>Maximum 20 symbols in length or 401 points</p>

---

**Maximum symbol rate**

Symbol rate is limited only by the measurement span, that is, the entire signal must fit within the analyzer's currently selected frequency span.  
Example: with raised-cosine filtering

$$\text{Max symbol rate}^* = \frac{\text{frequency span}}{1 + \alpha}$$

\* Maximum symbol rate doubled for VSB modulation format.

---

**Measurement results (formats other than FSK)**

<b>I-Q measured</b>	Time, spectrum (filtered, carrier locked, symbol locked)
<b>I-Q reference</b>	Time, spectrum (ideal, computed from detected symbols)
<b>I-Q error versus time</b>	Magnitude, phase (I-Q measured versus reference)
<b>Error vector</b>	Time, spectrum (vector difference between measured and reference)
<b>Symbol table and error summary</b>	Error vector magnitude is computed at symbol times only
<b>Instantaneous</b>	Time, spectrum, search time

---

**Measurement results (FSK)**

<b>FSK measured</b>	Time, spectrum
<b>FSK reference</b>	Time, spectrum
<b>Carrier error</b>	Magnitude
<b>FSK error</b>	Time, spectrum

---

**Display formats**

The following trace formats are available for measured data and computed ideal reference data, with complete marker and scaling capabilities and automatic grid line adjustment to ideal symbol or constellation states.

---

**Polar diagrams**

Constellation	Samples displayed only at symbol times
Vector	Display of trajectory between symbol times with 1–20 points/symbol

---

**I or Q versus time**

Eye diagrams	Adjustable from 0.1 to 40 symbols
Trellis diagrams	Adjustable from 0.1 to 40 symbols
Continuous error vector magnitude versus time	
Continuous I or Q versus time	

---

**Error summary (formats other than FSK)**

Measured rms and peak values of the following:

Error vector magnitude, magnitude error, phase error, frequency error (carrier offset frequency), I-Q offset, amplitude droop (PSK and MSK formats), SNR (8/16VSB and QAM formats), quadrature error, gain imbalance

For VSB formats, VSB pilot level is shown in dB relative to nominal. SNR is calculated from the real part of the error vector only.

For DVB formats, EVM is calculated without removing IQ offset.

---

**Error summary (FSK)**

Measured rms and peak values of the following:

FSK error, magnitude error, carrier offset frequency, deviation

---

**Detected bits (symbol table)**

Binary bits are displayed and grouped by symbols. Multiple pages can be scrolled for viewing large data blocks. Symbol marker (current symbol shown as inverse video) is coupled to measurement trace displays to identify states with corresponding bits. For formats other than DVBQAM and MSK, bits are user-definable for absolute states or differential transitions.

Note: Synchronization words are required to resolve carrier phase ambiguity in non-differential modulation formats.

---

**Accuracy**

Formats other than FSK, 8/16VSB and OQPSK. Averaging = 10 (typical)

Conditions: Specifications apply from 20 to 30° C, for a full scale signal, fully contained in the selected measurement span, random data sequence, instrument receiver mode of IF (0 to 36 MHz) or RF (20 to 2700 MHz), range  $\geq -25$  dBm, start frequency  $\geq 15\%$  of span,  $\alpha/BT \geq 0.3^*$ , and symbol rate  $\geq 1$  kHz. For symbol rates less than 1kHz accuracy may be limited by phase noise.

\*  $0.3 \leq \alpha \leq 0.7$  offset QPSK

---

**Residual errors (result = 150 symbols, averages = 10)**

---

**Residual EVM**

span $\leq 100$ kHz	<0.5% rms
span $\leq 1$ MHz	<0.5% rms
span $\leq 10$ MHz	<1.0% rms
span >10 MHz	<2.0% rms

---

**Magnitude error**

span $\leq 100$ kHz	0.3% rms
span $\leq 1$ MHz	0.5% rms
span $\leq 10$ MHz	1.0% rms
span >10 MHz	1.5% rms

---

**Phase error (For modulation formats with equal symbol amplitudes)**

span $\leq 100$ kHz	0.3° rms
span $\leq 1$ MHz	0.4° rms
span $\leq 10$ MHz	0.6° rms
span >10 MHz	1.2° rms

---

**Frequency error**

(added to frequency accuracy if applicable)

symbol rate/500,000

---

**I-Q/origin offset**

-60 dB or better

**Option B7N**  
**W-CDMA and cdma2000**  
**modulation analysis**  
 (requires option AYA  
 vector modulation analysis)

---

**Video modulation formats**

---

**Residual errors (typical)**

8/16 VSB: Symbol rate = 10.762 MHz,  $\alpha = 0.115$ ,  
 instrument receiver mode of IF (0–36 MHz) or  
 RF (20–2700 MHz), 7 MHz span, full-scale signal,  
 range  $\geq -25$  dBm, result length = 800, averages = 10

**Residual EVM**  $\leq 1.5\%$  (SNR  $\geq 36$  dB)

16, 32, 64 or 256 QAM: Symbol rate = 6.9 MHz,  
 $\alpha = 0.15$ , instrument receiver mode of IF (0–36 MHz)  
 or RF (20–2700 MHz), 8 MHz span, full-scale signal,  
 range  $\geq -25$  dBm, result length = 800, averages = 10

**Residual EVM**  $\leq 1.0\%$  (SNR  $\geq 40$  dB)

---

**Adaptive equalizer**

---

Removes the effects of linear distortion (e.g. non-flat  
 frequency response, multipath, etc.) from modulation  
 quality measurements. Equalizer performance is a  
 function of the setup parameters (equalization filter  
 length, convergence, taps/symbol) and the quality  
 of the signal being equalized.

**Equalizer type**

Decision-directed, LMS, feed-forward  
 equalization with adjustable convergence rate

Filter length 3–99 symbols, adjustable

Filter taps 1, 2, 4, 5, 10, or 20 taps/symbol

---

**Measurement results provided**

Equalizer impulse response

Channel frequency response

---

**Supported modulation formats**

MSK, BPSK, QPSK, OQPSK, DQPSK,  $\pi/4$ DQPSK,  
 8PSK, 16QAM, 32QAM, 64QAM, 256QAM,  
 8VSB, 16VSB,  $\frac{3\pi}{8}$  8PSK (EDGE)

---

**W-CDMA modulation analysis**

---

**Signal acquisition** (characteristic)

Result length Adjustable between 1 and 64 slots

Samples per symbol 1

Triggering Single/continuous, external

Measurement region Length and offset adjustable within result length

---

**Signal playback** (characteristic)

Result length Adjustable between 1 and 64 slots

Capture length 375 slots (standard)  
 (gap-free analysis at 0% overlap; at 5 MHz span) 3000 slots (option 144)  
6000 slots (option 288)

---

**Supported formats** (characteristic)

Formats Downlink, uplink

Single-button presets Downlink, uplink

---

**Other adjustable parameters** (characteristic)

Chip rate	Continuously adjustable
User-selectable alpha	Continuously adjustable between 0.05 and 1
Scramble code (downlink)	Continuously adjustable between 0 and 512
Scramble code (uplink)	Continuously adjustable between 0 and $2^{24} - 1$
Scramble offset (downlink)	Continuously adjustable between 0 and 15
Scramble type (downlink)	Standard, left, right
Sync type (downlink)	CPICH, SCH

---

**Measurement results** (characteristic)

**Composite** (all code channels at once or all symbol rates taken together)

Code domain power	All symbol rates together Individual symbol rates (7.5, 15, 30, 60, 120, 240, 480, 960 ksps)
Code domain error	Composite (all symbol rates taken together) Individual symbol rates (7.5, 15, 30, 60, 120, 240, 480, 960 ksps)
IQ measured	Time, spectrum
IQ reference	Time, spectrum
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time, spectrum (vector difference between measured and reference)
Composite errors	Summary of EVM, magnitude error, phase error, rho, peak active CDE, peak CDE, Ttrigger, frequency error, IQ offset, slot number

**Channel** (individual code channel)

IQ measured	Time
IQ reference	Time
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time (vector difference between measured and reference)
Symbol table and error summary	Summary of EVM, magnitude error, phase error, slot number, pilot bits, tDPCH

**Other**

Pre-demodulation	Time, spectrum
------------------	----------------

---

**Display formats** (characteristic)

CDP measurement results	I and Q shown separately on same trace for uplink
Channel measurement results	I and Q show separately
Code order	Hadamard, bit reverse
Other	Same as option AYA

---

**Accuracy** (typical)

(Input range within 5 dB of total signal power)

**Code domain**

CDP accuracy	$\pm 0.3$ dB (spread channel power within 20 dB of total power)
Symbol power versus time	$\pm 0.3$ dB (spread channel power within 20 dB of total power averaged over a slot)

**Composite EVM**

EVM floor	1.5% or less for pilot only
EVM floor	1.5% or less for test model 1 with 16 DPCH signal

**Frequency error**

Range (CPICH sync type)	±500 Hz
Accuracy	±10 Hz

---

**cdma2000 modulation analysis**

---

**Signal acquisition** (characteristic)

Result length	Adjustable between 1 and 64 PCGs forward link; 1 and 48 PCGs reverse link
Samples per symbol	1
Triggering	Single/continuous, external
Measurement region	Length and offset adjustable within result length

**Signal playback** (characteristic)

Result length	Adjustable between 1 and 64 PCGs forward link; 1 and 4 PCGs reverse link
Capture length (gap-free analysis at 0% overlap; at 2.6 MHz span)	400 PCGs (standard) 3200 PCGs (option 144) 6400 PCGs (option 288)

**Supported formats** (characteristic)

Formats	Forward, reverse
Single-button presets for	Forward, reverse

**Other adjustable parameters** (characteristic)

Chip rate	Continuously adjustable
Long code mask (reverse)	0
Base code length	64, 128

**Measurement results** (characteristic)**Composite** (all code channels at once or all symbol rates taken together)

Code domain power	All symbol rates together Individual symbol rates (9.6, 19.2, 38.4, 76.8, 153.6, 307.2 ksps)
Code domain error	Composite (all symbol rates taken together) Individual symbol rates (9.6, 19.2, 38.4, 76.8, 153.6, 307.2 ksps)
IQ measured	Time, spectrum
IQ reference	Time, spectrum
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time, spectrum (vector difference between measured and reference)
Composite errors	Summary of EVM, magnitude error, phase error, rho, peak active CDE, peak CDE, Ttrigger, frequency error, IQ offset, PCG number

**Channel** (individual code channel)

IQ measured	Time
IQ reference	Time
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time (vector difference between measured and reference)
Symbol table and error summary	Summary of EVM, magnitude error, phase error, PCG number



<b>Other</b>	
Pre-demodulation	Time, spectrum
<b>Display formats</b> (characteristic)	
CDP measurement results	I and Q shown separately on same trace
Channel measurement results	I and Q shown separately
Code order	Hadamard, bit-reverse
Other	Same as option AYA
<b>Accuracy</b> (typical) (Input range within 5 dB of total signal power)	
<b>Code domain</b>	
CDP accuracy	±0.3 dB (spread channel power within 20 dB of total power)
Symbol power versus time	±0.3 dB (spread channel power within 20 dB of total power averaged over a PCG)
<b>Composite EVM</b>	
EVM floor	1.5% or less for pilot only
EVM floor	1.5% or less for test model 1 with 16 DPCH signal
<b>Frequency error</b>	
Range	±500 Hz
Accuracy	±10 Hz

## Option 105

### Dynamic links to EESof ADS

This option links the 89600 VSA with design simulations running on the Agilent EESof Advanced Design System, providing real-time, interactive analysis of results. It adds a vector signal analyzer component to the Agilent Ptolemy simulation environment, which may then be connected to any node on the user's schematic. When the simulation is run, the 89600 software is automatically launched, and the calculated waveform for that node is streamed to the analyzer as its input signal. The analyzer's user interface and measurement functions are the same in this mode as they are for hardware-based measurements. Note that the front-end hardware need not be present when using the VSA software with the design software.

<b>ADS data types supported</b>	Float Complex Timed – baseband Timed – ComplexEnv
<b>VSA input modes</b>	Single channel Dual channel I + jQ
<b>VSA analysis range</b>	
Carrier frequency	dc to >1 THz
TStep (sample time)	<10 <sup>-12</sup> to >10 <sup>3</sup> s

<b>VSA component parameters</b> (user-settable)	VSATitle
	TStep
	SamplesPerSymbol
	RestoreHW
	SetupFile
	Start
	Stop
	TclTkMode
	RecordMode
<b>VSA component parameters</b> (passed from ADS)	Carrier frequency
	TStep
	Data type
<b>Number of VSAs that can run concurrently</b>	
ADS version 1.5 and later	20
ADS version 1.3	1
<b>Required ADS components</b>	
EESof Design Environment	E8900A/AN
EESof Data Display	E8901A/AN
EESof Ptolemy Simulator	E8823A/AN
Recommended ADS configurations:	
EESof Communication System Designer Pro	E8851A/AN
EESof Communication System Designer Premiere	E8852A/AN

## General

### System hardware

A standard 89640A RF vector signal analyzer consists of the following hardware:

RF tuner module	E2730A
RF input module	89605
95 Msample/s ADC	E1439A
IEEE-1394 controller with PCI interface	E8491B option 001
4-Slot VXI mainframe	E8408A options 001, 918

### Hardware interfaces (characteristics only)

<b>External trigger input</b>	BNC connector; 1 K $\Omega$ impedance
-------------------------------	---------------------------------------

### External frequency reference

Output	10 MHz at >+3 dBm into a 50 $\Omega$ load
Input	10 or 13 MHz ( $\pm 5$ ppm) at >0 dBm into a 50 $\Omega$ load. (89605B input module required. Available July 2001.)

### Safety and environmental

<b>Safety standards</b>	EN 61010-1 (1993)
-------------------------	-------------------

<b>Radiated emissions</b>	EN 61326-1
---------------------------	------------

<b>Immunity</b>	EN 61326-1
-----------------	------------

<b>Environmental</b>	Agilent Class B2, except as noted
----------------------	-----------------------------------

Operating temperature	0–50° C; 20–30° C for warranted specifications
-----------------------	--

Humidity	10% to 90% at 40° C
----------	---------------------

Altitude	3000 m
----------	--------

<b>Calibration interval</b>	2 year
-----------------------------	--------

### Power requirements

47–440 Hz operation	90–140 Vrms
---------------------	-------------

47–66 Hz operation	90–264 Vrms
--------------------	-------------

<b>Maximum power dissipation</b>	280 VA
----------------------------------	--------

### Physical

<b>Weight</b>	16 kg (36 lb)
---------------	---------------

### Dimensions

With protective bumpers	388 mm H x 152 mm W x 548 mm D
-------------------------	--------------------------------

Without bumpers	362 mm H x 133 mm W x 540 mm D
-----------------	--------------------------------

Pentium is a U.S. registered trademark of Intel Corporation.

Microsoft, Windows and Windows NT are U.S. registered trademarks of Microsoft Corporation.

MATLAB is a U.S. registered trademark of The Math Works, Incorporated.

Bluetooth is a trademark owned by its proprietor and used under license.

#### **Agilent Technologies' Test and Measurement Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

#### **Our Promise**

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

#### **Your Advantage**

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

**By internet, phone, or fax, get assistance with all your test & measurement needs**

#### **Online assistance:**

**[www.agilent.com/find/assist](http://www.agilent.com/find/assist)**

#### **Phone or Fax:**

##### **United States:**

(tel) 1 800 452 4844

##### **Latin America:**

(tel) (305) 269 7500

(fax) (305) 269 7599

##### **Canada:**

(tel) 1 877 894 4414

(fax) (905) 282 6495

##### **Australia:**

(tel) 1 800 629 485

(fax) (61 3) 9210 5947

##### **Europe:**

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

##### **New Zealand:**

(tel) 0 800 738 378

(fax) 64 4 495 8950

##### **Japan:**

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

##### **Asia Pacific:**

(tel) (852) 3197 7777

(fax) (852) 2506 9284

This information is subject to change without notice.

Copyright © 2000, 2001 Agilent Technologies Inc.

Printed in USA April 9, 2001

5980-1258E



**Agilent Technologies**