

This literature was published years prior to the establishment of Agilent Technologies as a company independent from Hewlett-Packard and describes products or services now available through Agilent. It may also refer to products/services no longer supported by Agilent. We regret any inconvenience caused by obsolete information. For the latest information on Agilent's test and measurement products go to:

www.agilent.com/find/products

Or in the U.S., call Agilent Technologies at 1-800-452-4844 (8am–8pm EST)



Agilent Technologies

Innovating the HP Way

HP 89431A 2 MHz to 2.65 GHz Downconverter

Technical Data



Specifications describe warranted performance over the temperature range of 0° to 55°C (except where noted) and include a 30-minute warm-up from ambient conditions, unless noted otherwise. Supplemental characteristics identified as “typical” or “characteristic,” provide useful information by giving non-warranted performance parameters. Typical performance is applicable from 20° to 30°C.

Definitions

dBc = dB relative to input signal level.

dBfs = dB relative to full scale amplitude range setting. Full scale corresponds to approximately -30 dB at the mixer.

FS or fs = Full scale; synonymous with amplitude range or input range.

TOI or Third-Order Intercept = The theoretical amplitude for a device at which the third-order intermodulation products would become equal in amplitude to one of the signals.

Frequency

Frequency tuning

Frequency range	2 MHz to 2650 MHz
Center frequency tuning resolution	1.171875 MHz

Output characteristics

IF bandwidth	8 MHz
Centered on	6 MHz

Note: Spectral information within the IF bandpass is “flipped” or “mirrored” relative to input signals within the tuned span.

Frequency accuracy (with standard high-precision frequency reference)

Frequency accuracy is the sum of initial accuracy, aging, and temperature drift.

Initial accuracy	± 0.1 ppm
Aging	± 0.015 ppm/month
Temperature drift	± 0.005 ppm (0° to 55°C)

Stability (spectral purity) (with standard high-precision frequency reference or equivalent with ≥ 5 dBm level)

Phase noise (absolute and residual)

$F_{in} \leq 200$ MHz

100 Hz offset	<− 103 dBc/Hz
1 kHz offset	<− 112 dBc/Hz
≥ 10 kHz offset	<− 116 dBc/Hz

200 MHz ≤ F_{in} ≤ 1 GHz


100 Hz offset	<− 96 dBc/Hz
1 kHz offset	<− 104 dBc/Hz
≥ 10 kHz offset	<− 116 dBc/Hz

1 GHz ≤ F_{in} ≤ 2650 MHz

100 Hz offset	<− 87 dBc/Hz
1 kHz offset	<− 97 dBc/Hz
≥ 10 kHz offset	<− 116 dBc/Hz

LO spurious sidebands

Offset > 1 kHz	<− 75 dBc
Offset ≤ 1 kHz	
$f_{in} \leq 2$ GHz	<− 70 dBc
$f_{in} > 2$ GHz	<− 68 dBc

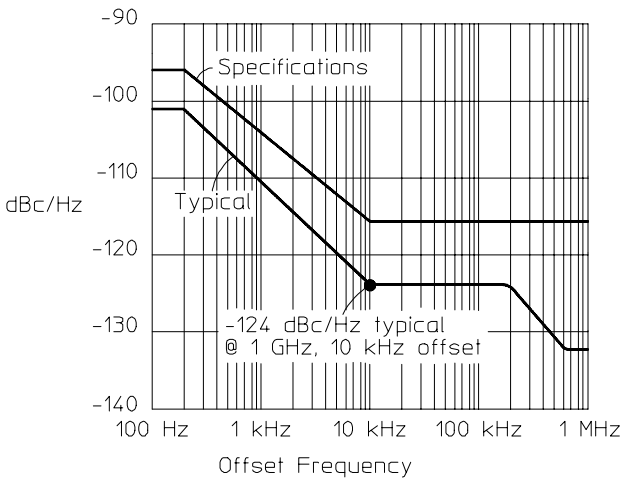

Spectral purity at 1 GHz

Amplitude

Input range – 50 dBm to + 25 dBm
(5 dB steps)

Maximum safe input power

Average continuous power + 25 dBm (300 mW)
DC voltage 25 V

Input port

Input channels 1
VSWR
Range ≥ -20 dBm 1.6:1 (12.7 dB return loss)
Range ≤ -25 dBm 1.8:1 (11 dB return loss)
Impedance 50 Ω
Connector Type-N

IF output level accuracy

When tuned to a single full scale input signal, the output signal will be:

Nominal level – 13 dBm
Frequency 6 MHz

Amplitude accuracy is the sum of:

Conversion gain ± 2 dB
accuracy (at – 20 dBm
input range and 6 MHz
input)

Input range attenuation accuracy

Range ≥ -25 dBm ± 2.5 dB
Range ≤ -30 dBm ± 4 dB

RF flatness (relative to 6 MHz)

Range ≥ -25 dBm +2 dB, – 3.5 dB
Range ≤ -30 dBm +3.5 dB, – 5 dB

IF flatness (over
 ± 4 MHz span, relative
to center frequency)

The spectrum of the output signal will be “flipped” or “mirrored” about the 6 MHz center of the IF passband relative to the spectrum of the input signal. Therefore an input signal 10 kHz below the input tuned frequency will appear 10 kHz above 6 MHz at the output.

Dynamic range

Dynamic range indicates the amplitude range that is free of erroneous signals within the measurement bandwidth.

Harmonic distortion (with a single full scale signal at the input)

≥ -25 dBm range < -75 dBc
 ≤ -30 dBm range < -54 dBc

Third-order intermodulation distortion (with two input tones at 6 dB below full scale and ≥ 10 MHz) < -78 dBc

Third-order intercept (TOI) ≥ 33 dB above range
(with two input tones at 6 dB below full scale and ≥ 10 MHz)

General spurious (with input signal level equal to range and input frequency ≤ 2650 MHz)

For spans ≤ 1.5 MHz and for
offset frequencies ≤ 1.5 MHz
from input signal < -75 dBc

For all spans and offsets < -70 dBc

Residual responses (50 Ω input) < -80 dBfs

Input noise density (50 Ω input, vector mode or scalar mode with sample detector)

	20° - 30°C	0° - 55°C
≥ -25 dBm range	< -115 dBfs/Hz	< -112 dBfs/Hz
≤ -30 dBm range	< -110 dBfs/Hz	< -109 dBfs/Hz

Sensitivity

– 50 dBm range < -160 dBm/Hz < -159 dBm/Hz

Safety and environmental

Safety standards	CSA Certified for Electronic Test and Measurement Equipment per CSA C22.2, No. 231
This product is designed for compliance to	UL1244 and IEC348, 1978
Acoustics	LpA < 55 dB typical at 25°C ambient
Temperature	
Operating	0° to 55°C
Storage	– 20° to 65°C
Humidity, non-condensing	
Operating	10% to 90% at 40°C
Storage	10% to 90% at 40°C
Altitude	
Operating (above 2285 m (7,500 ft), derate operating temperature by – 3.6°C/1000 m (– 1.1°C/1000 ft))	4600 m (15,000 ft)
Storage	4600 m (15,000 ft)
Calibration interval	1 year
Warm-up time	30 minutes
Power requirements	
115 VAC operation	90 - 140 Vrms, 47 - 63 Hz
230 VAC operation	198 - 264 Vrms, 47 - 63 Hz
Maximum power dissipation	275 VA
IEC 801-3 (Radiated Immunity) Performance degradation may occur at Severity Level 2.	

Physical

Weight	25 kg (55 lb)
Dimensions	
Height	173 mm (6.8 in)
Width	419 mm (16.5 in)
Depth	495 mm (19.5 in)

Interfaces (characteristics only)

External reference in/out	
External reference input	Locks to a 1, 2, 5, or 10 MHz (± 10 ppm) with a level > 0 dBm (use ≥ 5 dBm for optimum phase noise performance).
External reference output	Outputs 10 MHz at > 0 dBm (+6 dBm typical) into a 50 Ω load.
Serial communication port	
EIA 574	9-pin, RS-232 I/O port (to controller), nominally 9600 baud.