


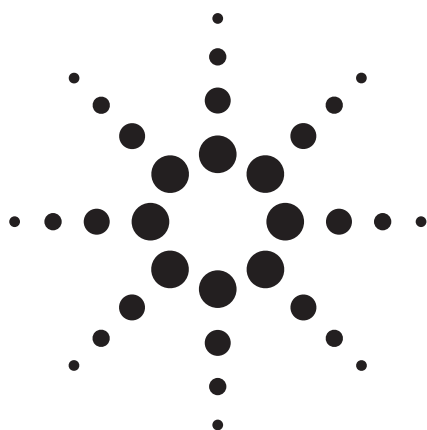


Agilent E1339A

72-Channel Digital Output/Relay Driver

Data Sheet

- 1-Slot, B-size, register based
- Digital output or dense relay driver
- Open Collector outputs switch up to 32 V
- Relay coil flyback protection
- Power for driver external devices
- Output cables supplied

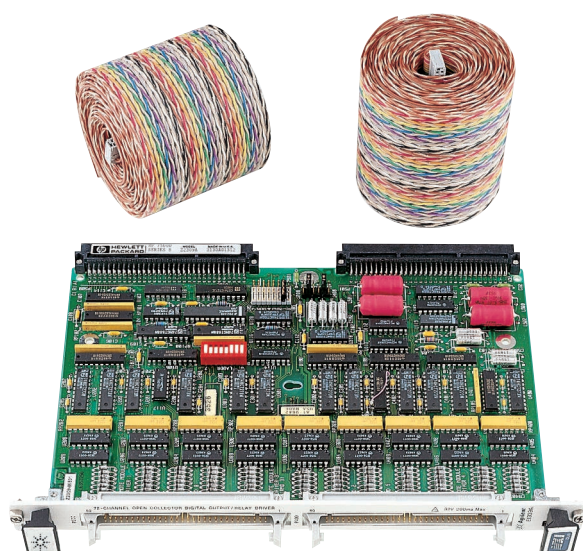

Agilent E1339A

Description

The Agilent E1339A 72-Channel Digital Output/Relay Driver is a **B-size, 1-slot, register-based VXI module**. Channels can be used (with external pull-up resistors) as digital outputs or as drivers for external relays.

All channels are referenced to chassis ground, can sink up to 200 mA each, and can switch voltages up to 32 V. Limited power is available on the module faceplate for powering external devices. An on-board jumper permits either the +5, +12, or +24 V VXI power supplies to be used for powering external devices.

Please note that +24 volt power is not available on Agilent B-size VXI mainframes. If +24 volt load power is required in such a case, an external power supply may be used. +24 volt power is available on Agilent C-size mainframes.

The downloadable SCPI and VXI*plug&play* drivers provide open/close commands for individual 72-channel operation or for 36-channel dual output operation (the latter is designed specifically for driving latching microwave relays).

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies
Innovating the HP Way

Connectors

User connection to the E1339A is implemented through two 60-pin faceplate ribbon cable headers with cable securing clips/extractors. Two 2-meter long-twisted pair ribbon mating cables with ribbon connectors are supplied with the module. The user-end of these cables is unterminated.

C-size Adapter

For adapting the E1339A to a C-size mainframe, the E1407A Adapter is recommended.

Product Specifications

General

Number of channels:	72
Channel type:	Output
Output or input type:	Open collector
Memory:	n/a
Max. pattern rate:	n/a
32-bit block transfer:	n/a
Test synchronization:	n/a
Sink current per channel:	200 mA
Maximum open collector voltage:	32 V
Maximum available current (only one of the three internal power supplies can be selected):	
+5 V:	1A (fused and requires P2)
+12 V:	1A (fused)
+12 V:	1 A (fused and requires P2)

VXI Characteristics

VXI device type:	Register based
Data transfer bus:	n/a
Size:	B
Slots:	1
Connectors:	P1/P2
Shared memory:	None
VXI busses:	None
C-size compatibility:	Yes, requires E1407A

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.


Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	No
I-SCPI Series 700:	No
C-CSPI Lynx OS:	No
C-SCPI Series 700:	No
Panel Drivers:	No
VXIplug&play Win Framework:	No
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current		
	I_{PM} (A)	I_{DM} (A)
+5 V:	0.10	0.10
+12 V:	0.10	0.01
–12 V:	–	–
+24 V:	–	–
–24 V:	–	–
–5.2 V:	–	–
–2 V:	–	–

Cooling/Slot	
Watts/slot:	6
ΔP mm H ₂ O:	0.05
Air flow liter/s:	0.42

Ordering Information	
Description	Product No.
72-Channel Digital Output/Relay Driver	E1339A
Service Manual	E1339A 0B3
3 Yr. Retn. to Agilent to 1 Yr. OnSite Warr.	E1339A W01

E1339A Circuit Diagram

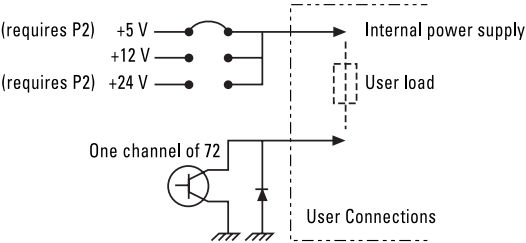

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax

United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5965-8831E



Agilent Technologies
Innovating the HP Way