


Agilent E1473A

Six 1x4, 50 Ω RF Multiplexer Expander

Data Sheet

- 1-Slot, C-size, register based
- Six 1x4 multiplexers
- Switch signals up to 1.3 GHz
- SMB male connectors for high performance
- Requires the E1472A/E1474A RF MUXes
- Can be externally mounted up to 8 meters away

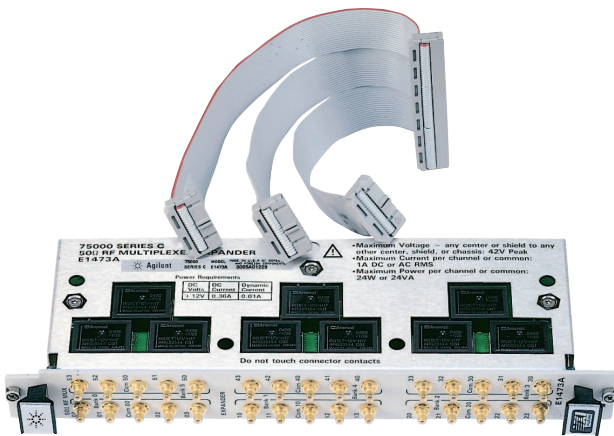

Agilent E1473A

Description


The Agilent E1473A 50 Ω RF Multiplexer Expander is a **C-size, 1-slot, register-based VXI module**. It is the ideal choice to inexpensively increase system switching capacity to switch test signals from your application to your test instruments such as oscilloscope and spectrum, network, distortion analyzers, or other RF equipment.

The E1473A expander is connected to, and requires, either an E1472A or E1474A RF multiplexer in the same system. Up to two E1473A multiplexer expanders can be connected to one multiplexer, providing a total of eighteen 1x4 multiplexer banks. You can mix and match the E1473A 50 Ω and E1475A 75 Ω expanders with the E1472A 50 Ω and E1474A 75 Ω multiplexers.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Configuration

The Agilent E1473A can be installed in a VXI C-size slot, adjacent to the E1472A (or E1474A), or rack mounted externally up to eight meters from the VXI mainframe using remote extender cables. The adjacent slot can be used by another module, making the multiplexer expander a slotless device. Remote installation of the E1473A expander close to the device under test allows the test cable length to be kept as short as possible, reducing signal delay and insertion loss.



Agilent Technologies
Innovating the HP Way

If the expander is to be physically located away from the mainframe, order the Cable Extension Kit (P/N E1473-80002). Each kit includes two 0.8 meter cables, each controlling three of the six expander banks. Up to ten extender cables can be daisy-chained. Therefore, to remotely install one E1473A expander at a distance of eight meters, controlling all six multiplexer banks, requires ten E1473-80002 kits.

The switching sections of the E1473A 50 Ω RF multiplexer expander and the E1472A 50 Ω RF multiplexer are identical. Only one channel in each bank can be connected to its common at any time. The multiplexer relays are arranged in a tree-switched configuration, providing high isolation and low VSWR. Each channel consists of a nonlatching armature relay. At power-on or reset, channels 00, 10, . . . 50 are connected to COM 00, 10, . . . 50, respectively, and all other channels are open (unterminated).

Cables and Connectors

Various 50 Ω cables are available from Agilent for connecting to the SNB connectors on the front panel of the multiplexer. Adapters and other connectors are also available. Connectors are also available from Johnson Components:

U.S.A. Tel.: 1-800-247-8256
Outside U.S.A. Tel.: (507) 835-6222
Fax.: (507) 835-8356

Product Specifications

Input

Maximum voltage (center or shield-to-center, shield or chassis): 42 V

Maximum current (per channel or common):

DC: 1 A

AC rms: 1 A

Maximum power (per channel or common):

DC: 24 W

AC rms: 24 VA

DC

Maximum thermal offset: 6 μV

Closed channel resistance (typical): <1 Ω initial

Insulation resistance (between any two terminals): >10E8 Ω ≤40 °C, ≤65% RH

AC

(Note: For AC performance, ZL=ZS=ZO, ≤40 °C, ≤95% for C-size, RH ≤65% for B-size)

Characteristic impedance

(Zo): 50 Ω

Insertion loss:

<10 MHz: <0.1 dB

<100 MHz: <0.4 dB

<500 MHz: <0.9 dB

<1.3 GHz: <1.5 dB

<3 GHz (typ): <8.0 dB

Crosstalk (channel-to-channel):

<10 MHz: <-90 dB

<100 MHz: <-80 dB

Crosstalk (channel-to-channel, one channel closed or channel-to-common) (terminated):

<200 MHz: n/a

<500 MHz: <-62 dB

<1.3 GHz: <-50 dB

<3 GHz (typ): n/a

VSWR:

<10 MHz: <1.05

<100 MHz: <1.15

<200 MHz: n/a

<500 MHz: <1.35

<1.3 GHz: <1.5

<3 GHz: n/a

Risetime:

<300 ps

Signal delay:

<3 ns

Capacitance:

Center-shield: n/a

Chassis-shield: n/a

General Characteristics

Relays: Non-latching armature

Power up/down state: All open

Minimum relay life:

No load: 5x10E6 operations

Rated load: 10E5 operations

General Specifications

VXI Characteristics

VXI device type: Register based, A16, slave only

Size: C

Slots: 1

Connectors: P1

Shared memory: None

VXI busses: None

C-size compatibility: n/a

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module

firmware: Downloadable

Command module

firmware rev: A.02

I-SCPI Win 3.1: Yes

I-SCPI Series 700: Yes

C-SCPI LynxOS: Yes

C-SCPI Series 700: Yes

Panel Drivers: Yes, with E1472A

VXIplug&play Win

Framework: Yes

VXIplug&play Win95/NT

Framework: Yes

VXIplug&play HP-UX

Framework: No

Module Current

	I_{PM}	I_{DM}
+5 V:	0	0
+12 V:	0.36	0
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V	0	0
-2 V:	0	0

Cooling/Slot


Watts/slot: 1.00

ΔP mm H₂O: 0.02


Air Flow liter/s: 0.10

Ordering Information


Description	Product No.
Six 1x4 50 Ω RF Multiplexer Expander	E1473A
Service Manual	E1473A 0B3
3 yr. Retn. to Agilent to 1 yr. OnSite Warr.	E1473A W01
RF MUX Cable Kit for E1473A RF Expander	E1473-80002

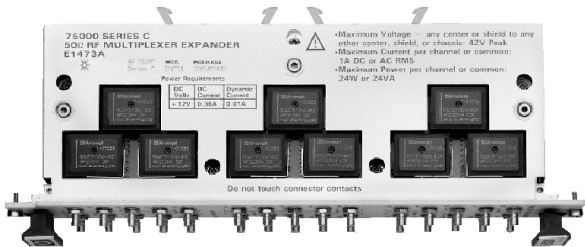




Agilent E1473A expander module top view

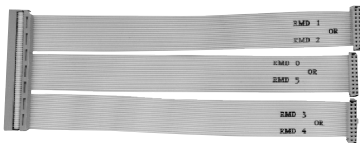

Module-to-backplane cables

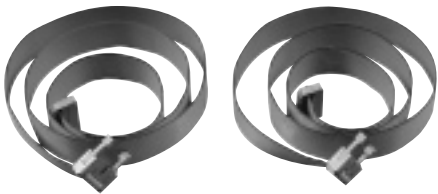

Remote expander cables

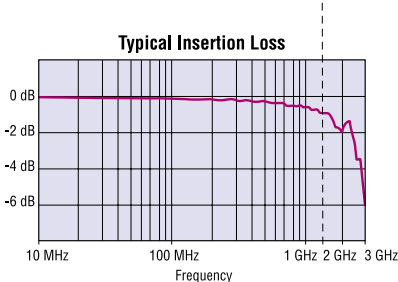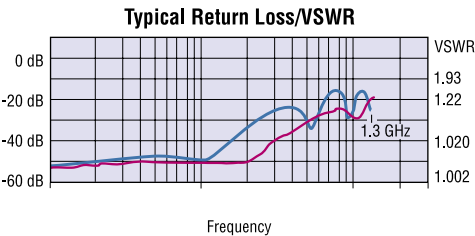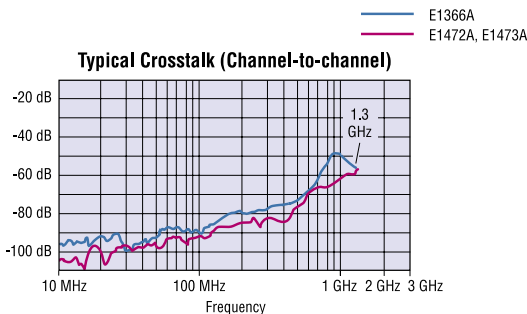

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax

United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5965-5615E



Agilent Technologies
Innovating the HP Way