

AMM-9861PSM


3 - 30 GHz Wideband Low Noise Amplifier

DEVICE OVERVIEW

General Description

The AMM-9861PSM is a wideband low noise amplifier capable of providing 11.7 dB gain and +24 dBm OIP3 with a low 2.5 dB typical noise figure. The AMM-9861PSM is an ideal linear signal amplifier for applications requiring low power consumption and small form-factors. This amplifier has exceptionally flat response across its entire operating bandwidth.

[Download s-parameters here](#)



Features


- Broadband 3 to 30GHz Operation
- Low Noise Figure
- Exceptionally Flat RF Performance Across Frequency
- Excellent Return Losses

Applications

- Communication Systems
- Test and Measurement Equipment
- Satellite Communications
- Electronic Warfare

Functional Block

Diagram

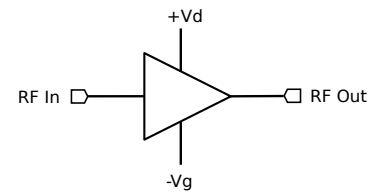

Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
AMM-9861PSM	3 - 30 GHz Wideband Low Noise Amplifier	QFN	RoHS REACH	Released	EAR99
<u>EVB-AMM-9861P</u>	Evaluation Board, AMM-9861PSM Wideband Low Noise Amplifier	-	REACH RoHS	Released	-

AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Table Of Contents

■ Device Overview

General Description
Features
Applications
Functional Block Diagram

■ Port Configuration and Functions

Port Diagram
Port Functions

■ Revision History

■ Specifications

Absolute Maximum Ratings
Package Information
Recommended Operating Conditions
Sequencing Requirements
Electrical Specifications
Typical Performance Plots (vs Bias)
Typical Performance Plots (vs Temperature)
Typical Performance Plots (vs Input Power)

■ Operation

Application Circuit
Application Circuit Description

■ Mechanical Data

Outline Drawing

■ Footprint Image

■ Evaluation Board

Evaluation Board Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2025-03-19	Initial Release


AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Port Configuration and Functions

Port Diagram






A port diagram of the AMM-9861PSM is shown below.

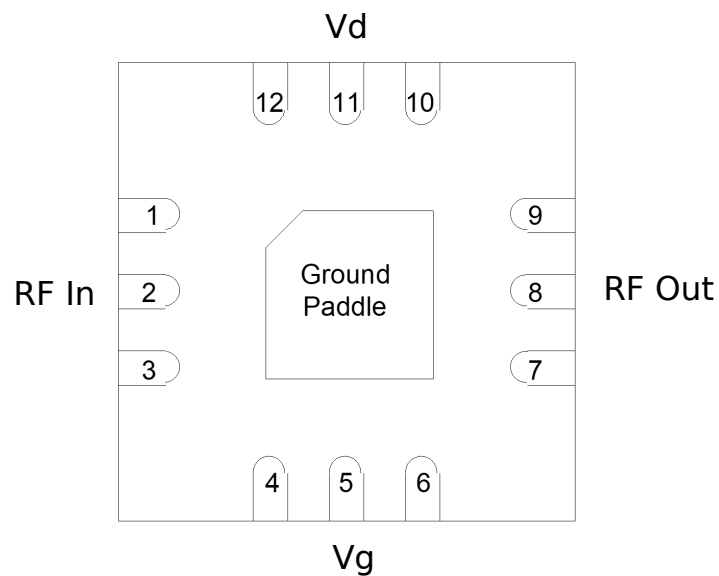

AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Paddle	Ground	DC and RF Ground are provided through the QFN paddle. The paddle should be attached to a DC/RF ground with high thermal and electrical conductivity.	
Pin 11	Vd	This is the positive DC supply voltage for the amplifier IC. This pin is nominally set to +4V. This part requires an off-chip bypass capacitor of 0.1uF installed at this pin as close to the IC as possible. See applications circuit.	
Pin 2	RF Input	This is the amplifiers RF input port. This port is internally matched to 50 Ohms and is internally DC shorted to GND. This pin may be left floating if no DC is present on the line but should be DC blocked otherwise.	
Pin 5	Vg	This is the negative DC bias voltage for the amplifier IC. The voltage at this pin controls the current draw Id of the part. Higher voltage results in higher current. For normal operation, the voltage at this pin is adjusted to produce an Id of 21mA when Vd=4V. This part requires an off-chip bypass capacitor in series with a 10 Ohm resistor installed at this pin as close to the IC as possible. See applications circuit.	
Pin 8	RF Output	This is the amplifiers RF output port. This port is internally matched to 50 Ohms and is internally DC shorted to GND. This pin may be left floating if no DC is present on the line but should be DC blocked otherwise.	
Pins 1,3,4,6,7,9,10 and 12	Non-connect (NC)	These pins are not internally connected. Datasheet performance is measured with these pins connected to ground.	-

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If any one of these limits are exceeded, the device may become inoperable or have a reduced lifetime. Reliability limits are individual, instantaneous catastrophic limits only. Functional operation limits are indicated below. Operation of the device at multiple absolute maximum limits or for extended periods at a single limit can cause degradation and damage to the device.

Parameter	Maximum Rating	Unit
Drain Current (Id) (No RF Applied)	84	mA
Maximum Operating Temperature for MTTF > 1E6 hours	85	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature for MTTF > 1E6 hours	-40	°C
Minimum Storage Temperature	-65	°C
Negative Bias Voltage	-2	V
Positive Drain Supply Voltage (Vd)	8	V
RF Input Power	10	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	3 x 3 mm
Moisture Sensitivity Level	-	MSL 1

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Positive DC Voltage (Vd)	4	4	4	V
Ambient Temperature	-40	25	85	°C
Negative Bias Voltage (Vg)	-0.45	-0.4	-0.35	V
Positive DC Current (Id) (No RF Input)	16	21	27	mA

Sequencing Requirements

Turn-on Procedure:

1. Apply Vg (Pin 5)
2. Apply Vd (Pin 11)

Turn-off Procedure:

1. Turn off Vd (Pin 11)
2. Turn off Vg (Pin 5)

Note: RF input power can be injected at any moment in the bias sequencing procedure.

AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Electrical Specifications

The electrical specifications apply at $T_a = +25^\circ\text{C}$ in a 50Ω system. QFNs are 100% RF tested.









Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Small Signal Gain	$T_a = 25^\circ\text{C}$, Input Power = -20.00 dBm, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	3	30	-	11.7	-	dB
Input Return Loss	$T_a = 25^\circ\text{C}$, Input Power = -20.00 dBm, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	3	30	-	14	-	dB
Output Return Loss	$T_a = 25^\circ\text{C}$, Input Power = -20.00 dBm, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	3	30	-	14	-	dB
Reverse Isolation	$T_a = 25^\circ\text{C}$, Input Power = -20.00 dBm, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	3	30	-	17	-	dB
Noise Figure	$T_a = 25^\circ\text{C}$, Input Power = -20.00 dBm, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	3	30	-	2.5	-	dB
Output IP3	$T_a = 25^\circ\text{C}$, 4V/-0.4 bias, 20MHz tone spacing, Input Power = -10dBm	3	30	-	24	-	dBm
Output IP2	$T_a = 25^\circ\text{C}$, 4V/-0.4 bias, 20MHz tone spacing, Input Power = -10dBm	1.5	15	-	24	-	dBm
Output P1dB	$T_a = 25^\circ\text{C}$, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	3	20	-	12.4	-	dBm
Output P1dB	$T_a = 25^\circ\text{C}$, $V_{d1} = 4\text{V}$, $V_{b1} = -0.4\text{V}$, $I_{d1} = 21\text{mA}$	20	30	-	9	-	dBm
Drain Current, I_{d1}	4V/-0.4V bias, No RF Applied	-	-	-	21	-	mA

^[1] Bias conditions for I_d tested with no RF input power. Bias conditions presented as V_d/V_g .

AMM-9861PSM


3 - 30 GHz Wideband Low Noise Amplifier

Typical Performance Plots (vs Bias)

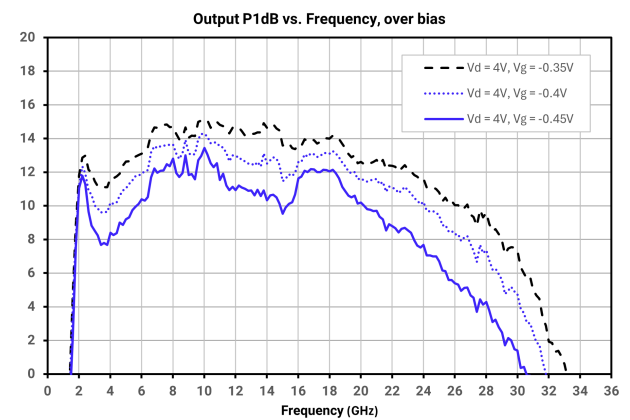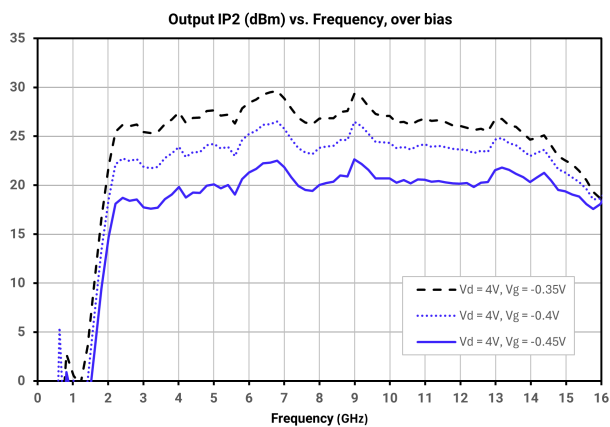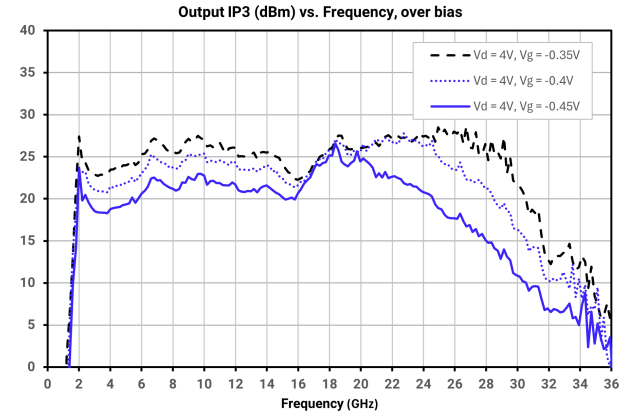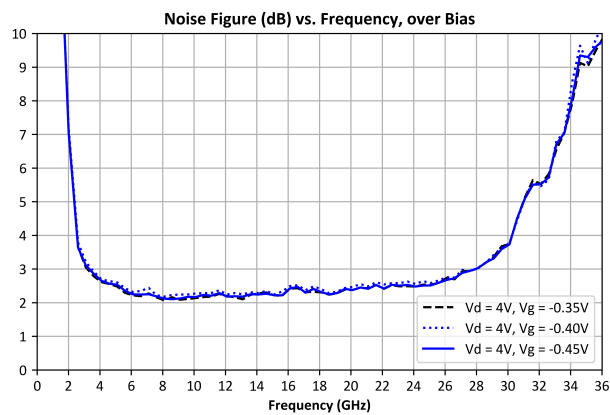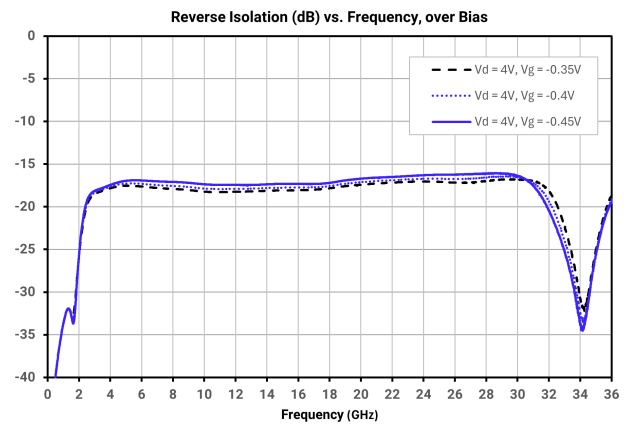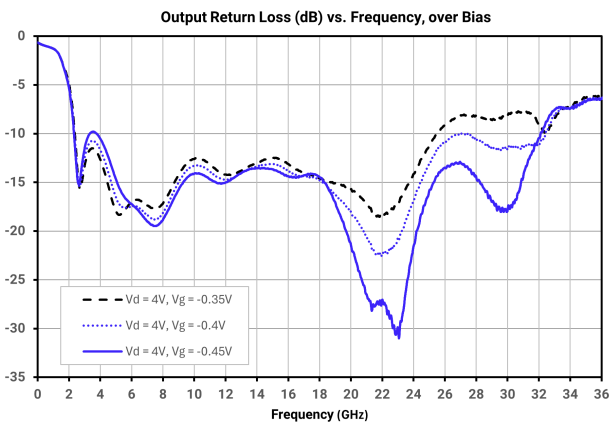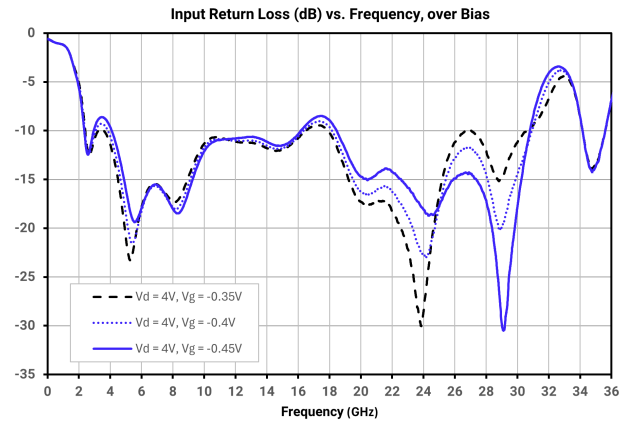
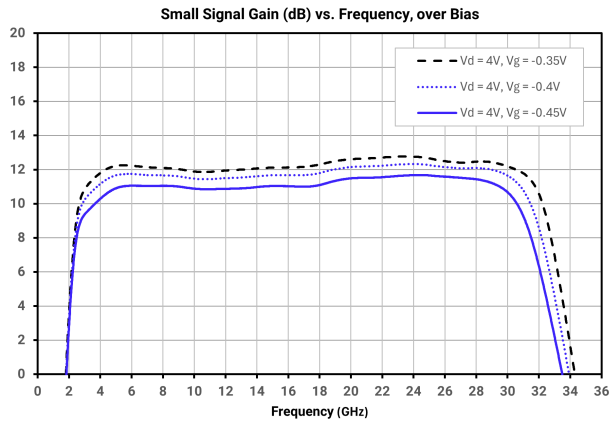


AMM-9861PSM




3 - 30 GHz Wideband Low Noise Amplifier

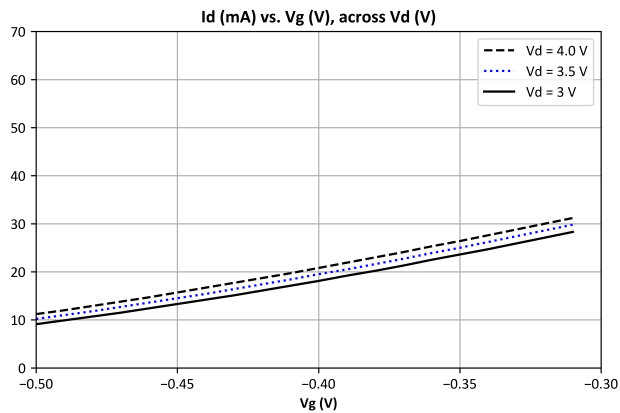

Typical Performance Plots (vs Temperature)

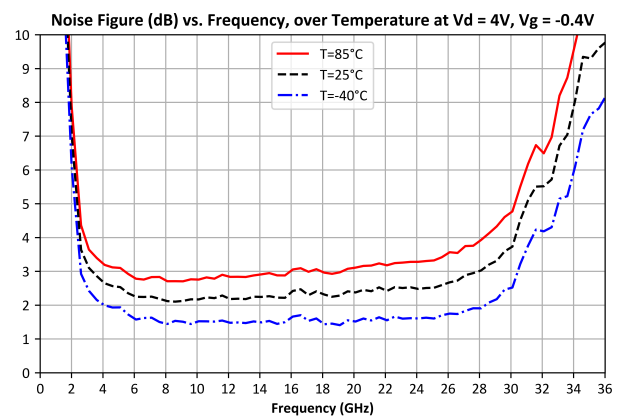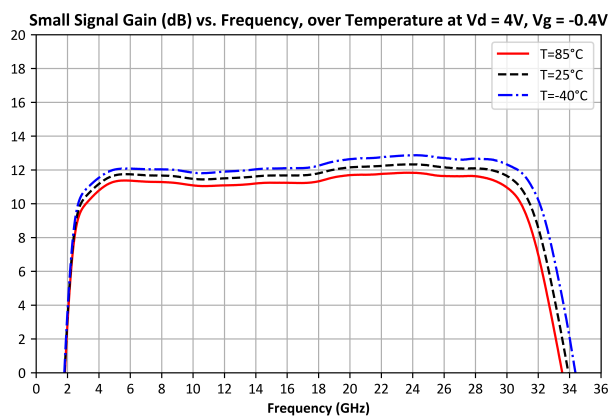


Typical Performance Plots (vs Input Power)

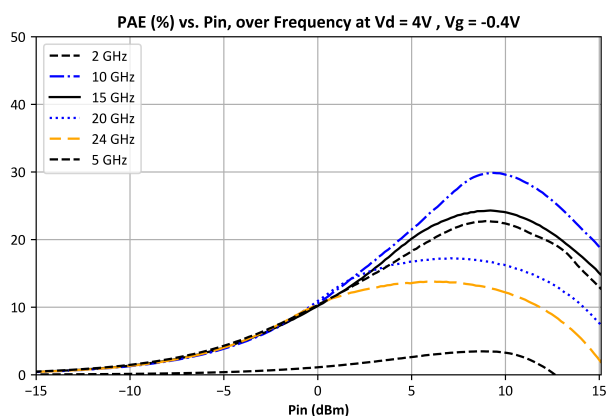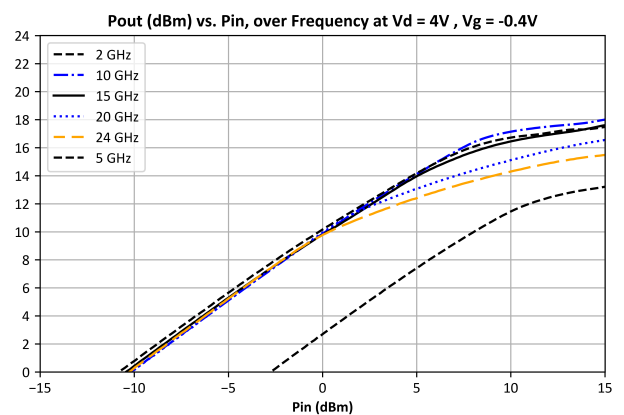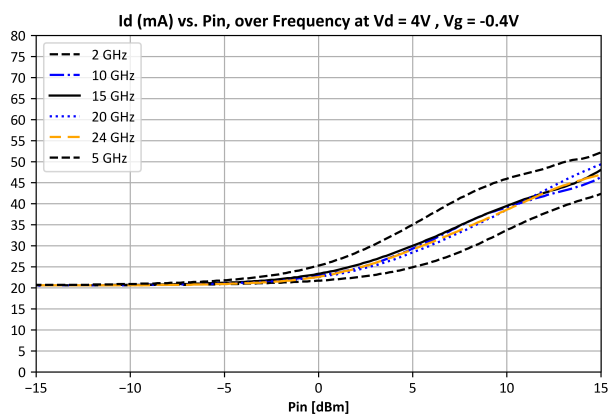

AMM-9861PSM

3 - 30 GHz Wideband Low Noise
Amplifier

Application Circuit

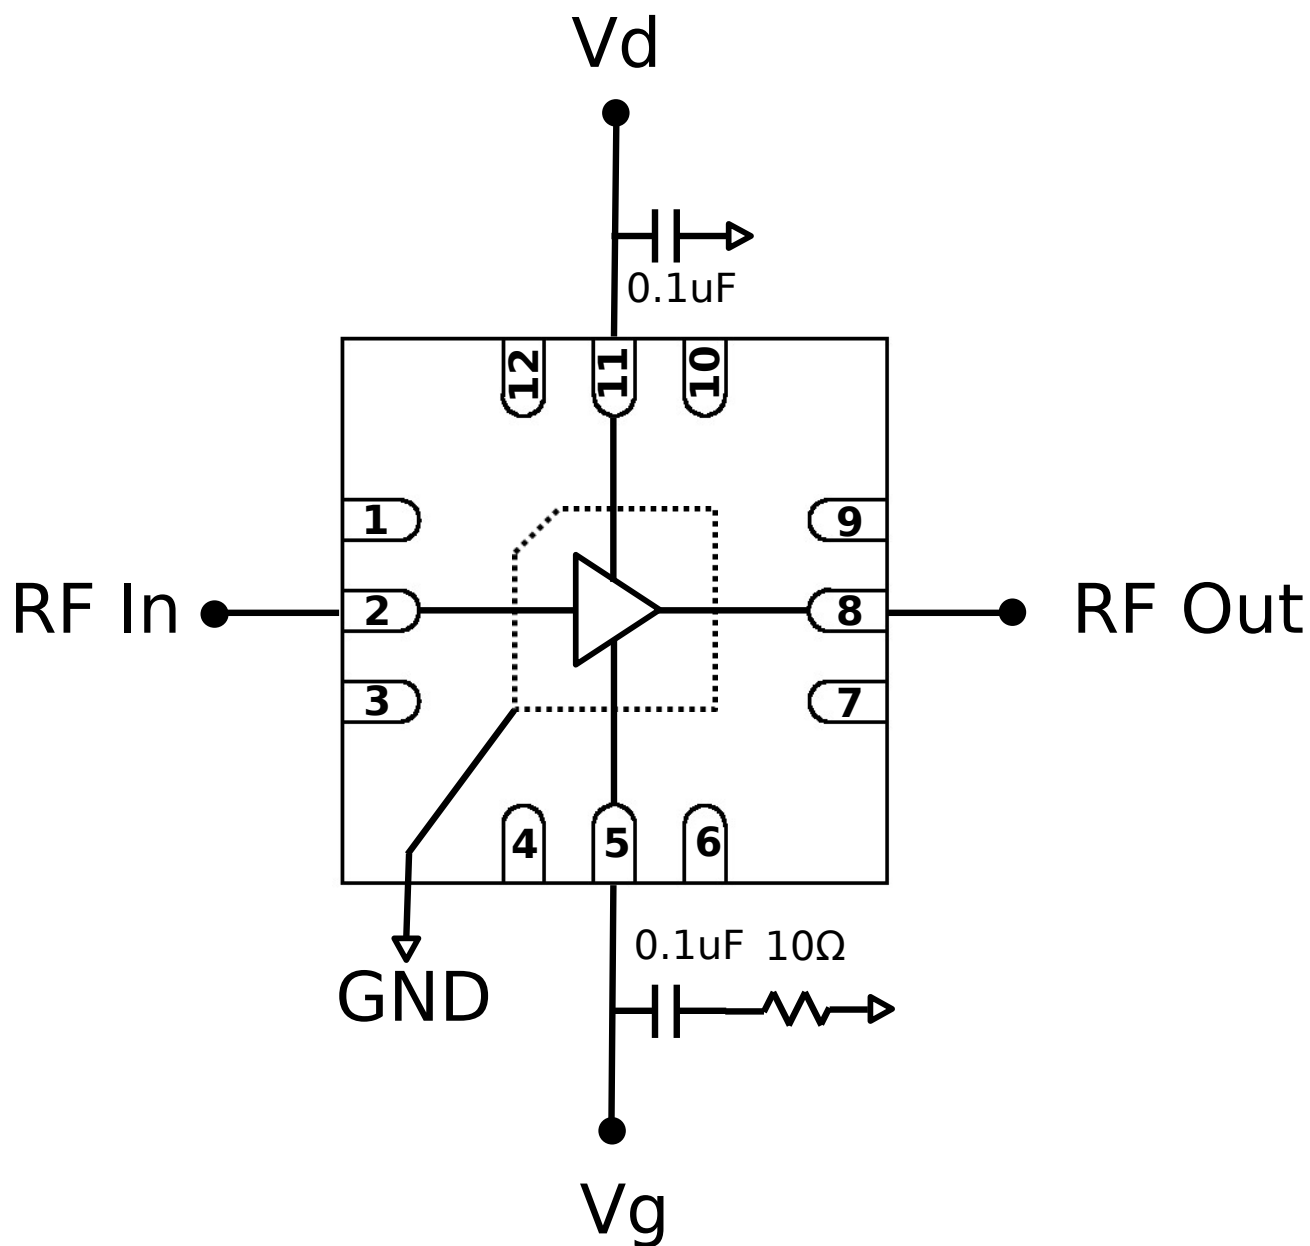

AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Application Circuit Description

Above is the recommended application circuit for the AMM-9861PSM. Multiple DC power supply bypassing capacitors are shown around the part. DC drain voltage is supplied to the amplifier across a 0.1uF bypass capacitor to the Vd pin. DC bias voltage is supplied to the Vg pin across a 0.1uF+10Ω bypass capacitor combination. The RF input and output ports are internally shorted to GND but can be left floating if no DC is present on the RF line. If DC is present, blocking capacitors are required at the input and output.


AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#)

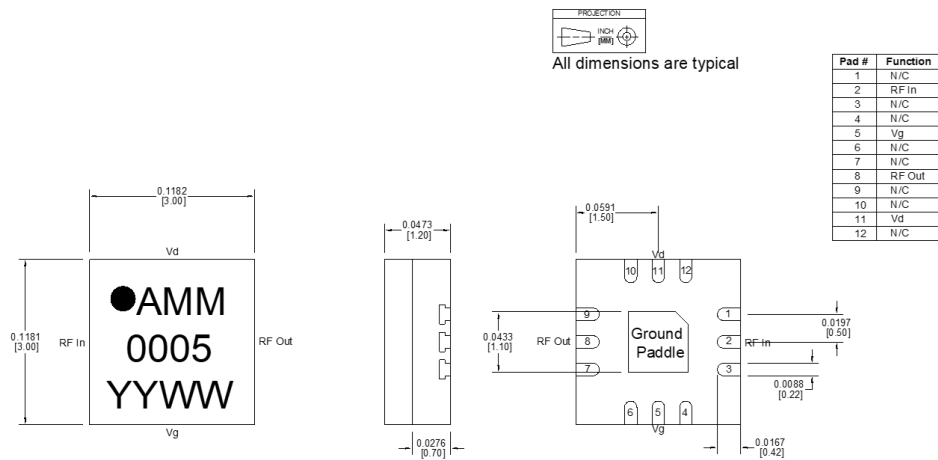

Notes (unless otherwise specified):


1. Substrate material is LCP.
2. I/O Leads and Die Paddle are 0.05 micron Au over 0.02 microns Pd over 0.5 microns Ni.
3. All unconnected pins should be connected to PCB RF ground.

AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

Footprint Image


Download : [Footprint Drawing](#)

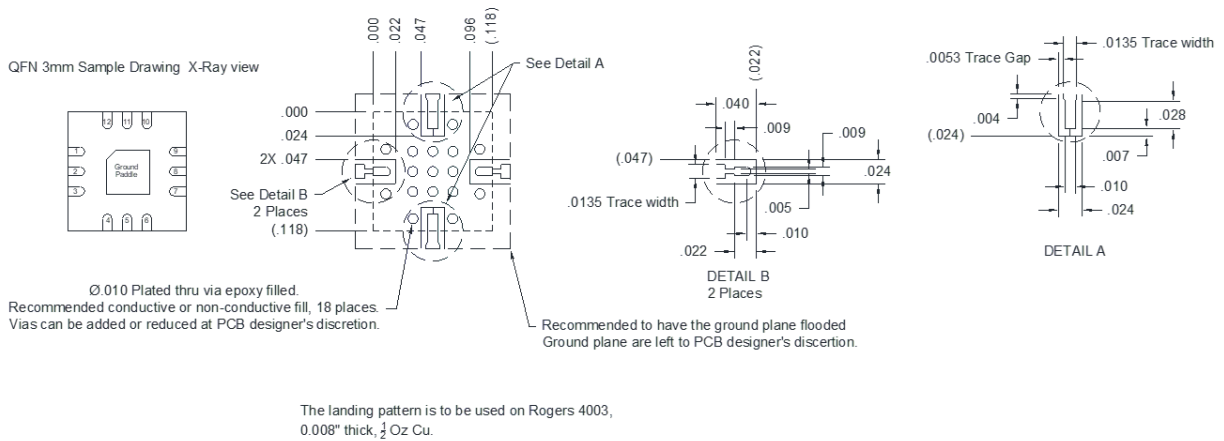

AMM-9861PSM

3 - 30 GHz Wideband Low Noise
Amplifier

Evaluation Board - Outline Drawing

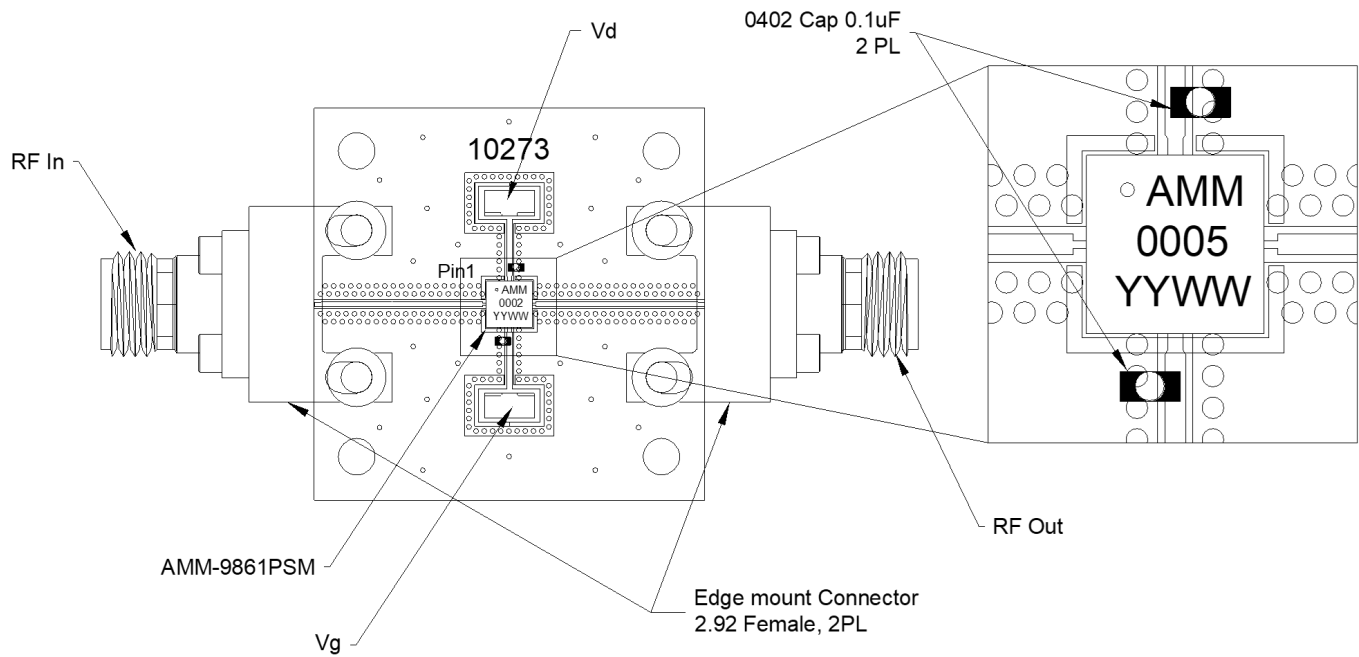

AMM-9861PSM

3 - 30 GHz Wideband Low Noise Amplifier

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, Inc