


BAL-0416SMG

Surface-Mount Broadband Balun

DEVICE OVERVIEW

General Description

The BAL-0416SMG is a Surface Mount Microlithic™ balun. As with all Microlithic™ baluns, it features excellent amplitude balance, phase balance, and common mode rejection across a broad bandwidth and in a miniaturized form factor. It has significant isolation, reducing the reflection of unwanted common mode signals. The BAL-0416SMG is a lead free, RoHS compliant package compatible with standard leaded and lead-free solder reflows. SMA connectorized evaluation packages are available. The BAL-0416SMG is an excellent choice for balanced amplifiers, clock distribution, and higher order Nyquist sampling in analog to digital converters.



[Download s-parameters here](#)


Features

- 4 GHz to 16 GHz 1:2 Balun (Balanced to Unbalanced Transformer)
- Transforms 50 Ω Input to 100 Ω Differential (50 Ohm Single) Output
- Tuned for Optimal Phase/Amplitude Balance

Applications

- Analog to Digital Converters
- Balanced Receivers
- Balanced Amplifiers
- Mixers
- Clock Distribution
- Signal Integrity

Functional Block Diagram

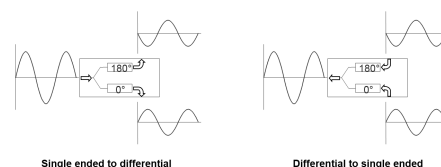

Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
BAL-0416SMG	Surface-Mount Broadband Balun	SMG	-	RoHS	Released	EAR99

Table Of Contents




- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Functions
- **Revision History**
- **Specifications**
 - Package Information
 - Electrical Specifications
 - Typical Performance Scattering Parameters
 - Mixed Mode Scattering Parameters
- **Mechanical Data**
 - Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2014-01-01	Datasheet initial Release
A	2016-01-01	Typical Performance Plots Updated
B	2019-10-01	Mixed Mode Scattering Parameters added
C	2020-07-01	Specs table update
D	2020-10-01	Specs table update
E	2021-10-01	Plating spec update

Port Configuration and Functions

Port Functions

Port	Function	Description	Equivalent Circuit for Package
0° Port (Balanced)	0° Port	The 0° port is DC short to the 180° port and passes through a resistor to ground.	
180° Port (Balanced)	180° Port	The 180° port is DC short to the 0° port and passes through a resistor to ground.	
Common Port (Unbalanced)	RF Input	The common port is DC short to ground.	

Specifications

Package Information

Parameter	Details	Rating
Dimensions	-	2.79 x 2.54 mm

Electrical Specifications

Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.







Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Insertion Loss as a Mode Converter ¹	-	4	16	-	3.3	5.5	dB
Nominal Phase Shift	-	4	16	-	180	-	°
Amplitude Balance	-	4	16	-	0.4	1	dB
Phase Balance	-	4	12	-	1	5	°
Phase Balance	-	12	16	-	6	15	°
Common Mode Rejection	-	4	12	25	35	-	dB
Common Mode Rejection	-	12	16	15	26	-	dB
Isolation	-	-	-	-	15	-	dB
VSWR	-	-	-	-	2.5	-	-
Total Input Power	-	-	-	-	-	1	W

^[1] Includes fixture losses

Typical Performance Scattering Parameters







Three port scattering parameters measured as three single-ended 50Ω ports showing relationship between any two ports. For example: S21 and S31, often referred to as insertion loss of a balun, is the output response on ports 2 and 3 with an input stimulus on port 1.

¹Includes test fixture loss. Results are not de-embedded.

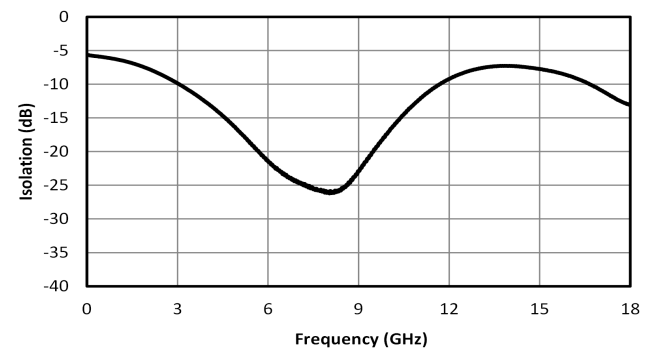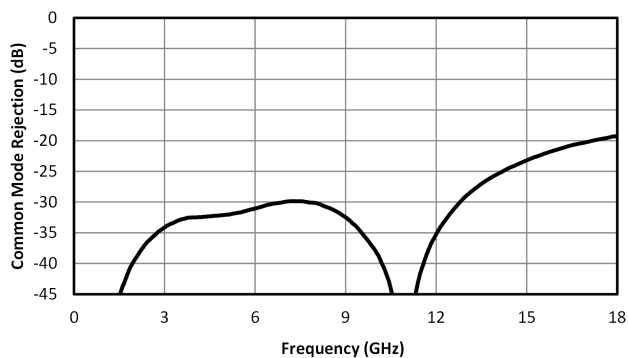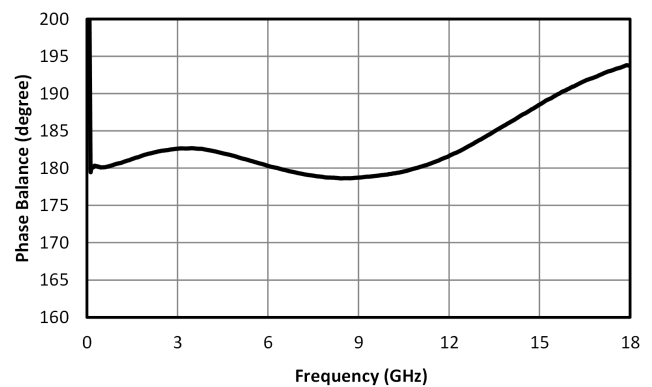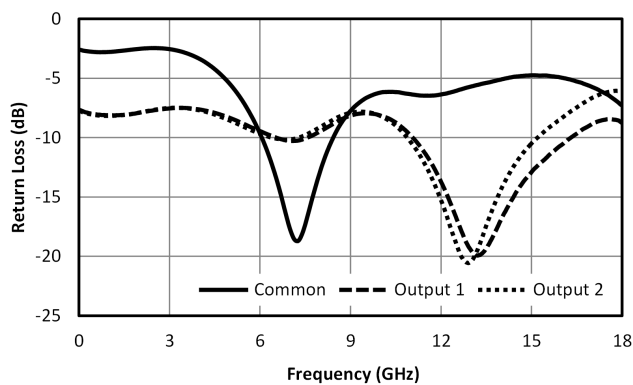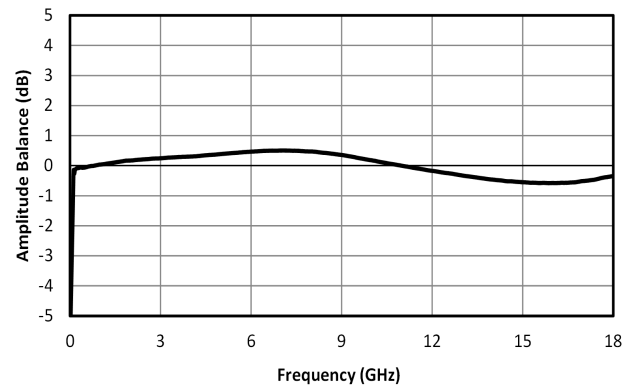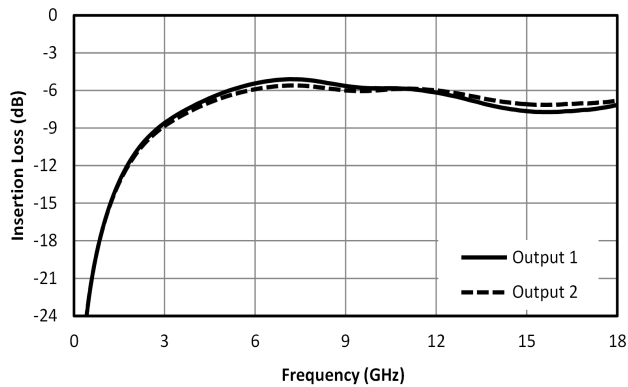


Mixed Mode Scattering Parameters

Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: S_{cs12} is the Common output response given a single ended input.

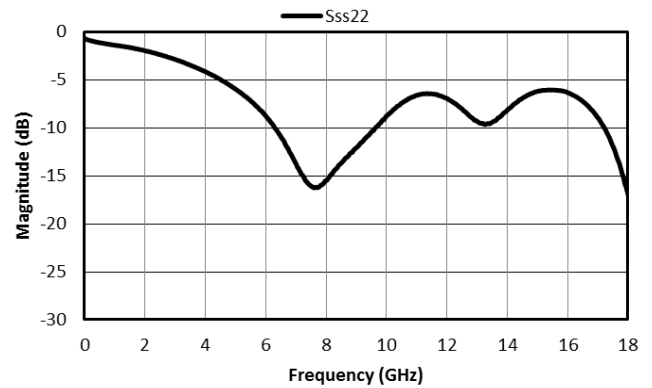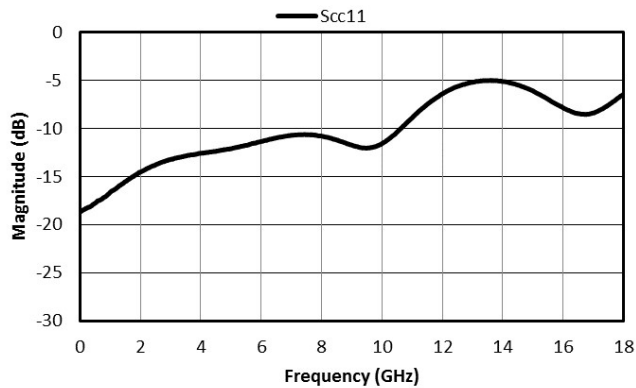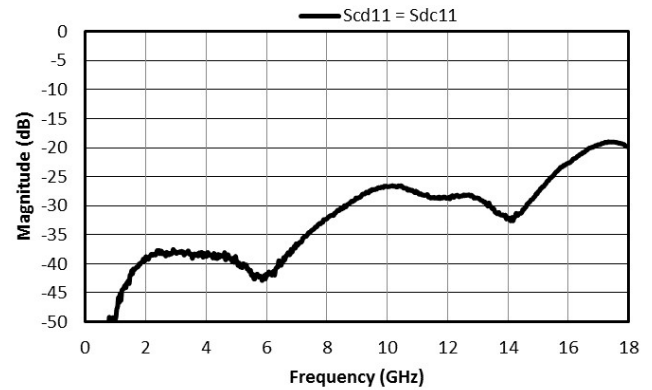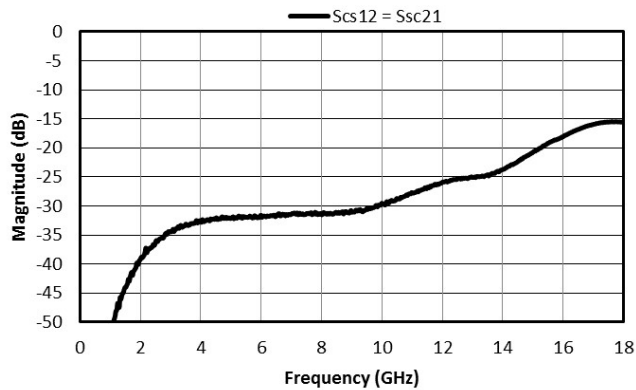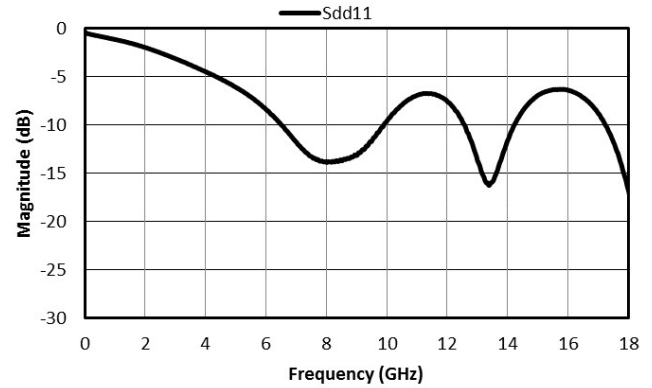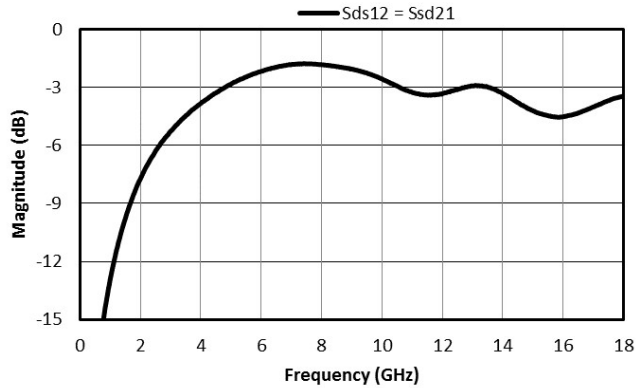

Mechanical Data

Outline Drawing

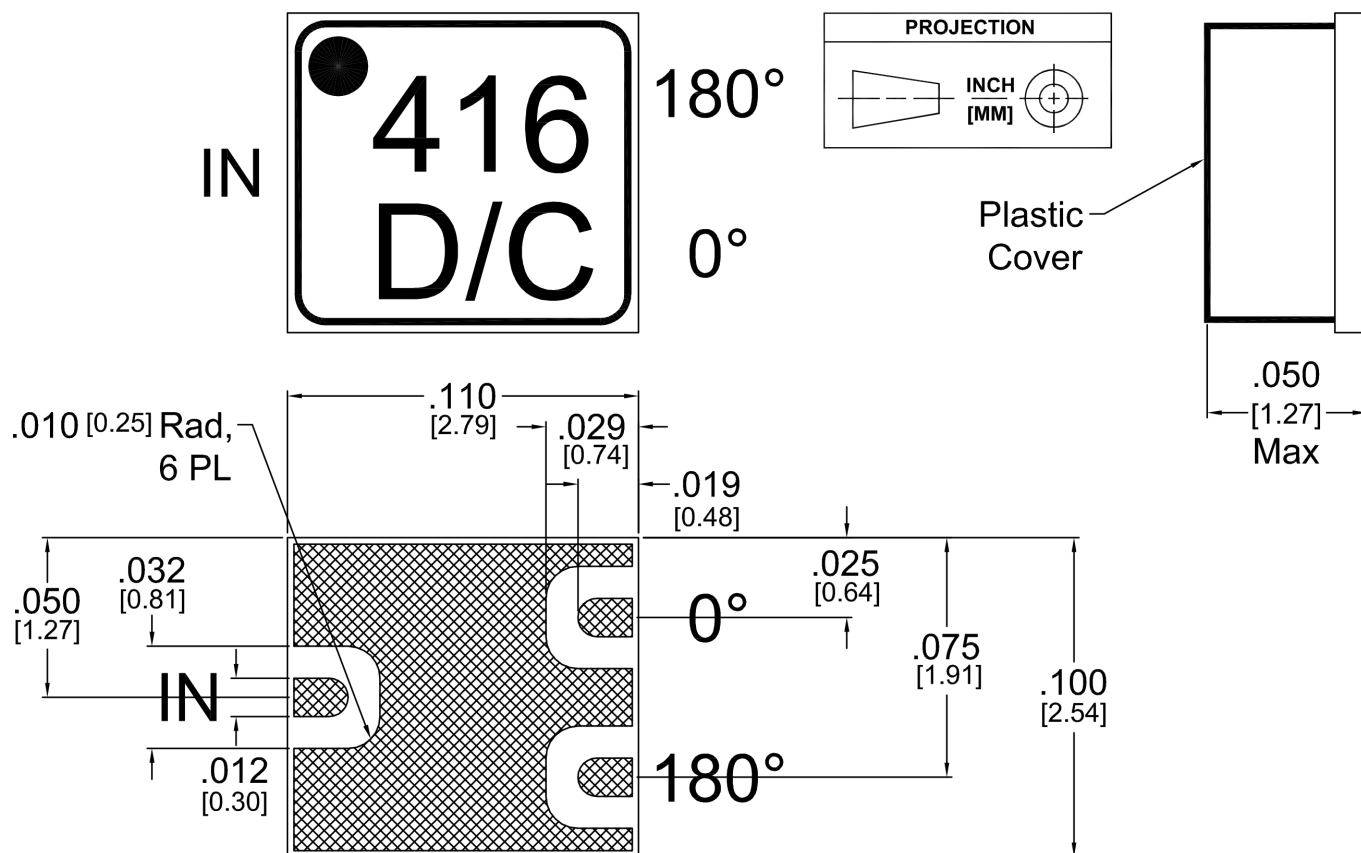

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2014, 2016, 2019 - 2021, Marki Microwave, Inc