


BTN2-0018

High Power Bias Tee

DEVICE OVERVIEW

General Description

The BTN2-0018 is constructed using a custom-made, resonance-free conical inductor to achieve extremely broadband performance. By minimizing the overall inductor size and using proprietary packaging techniques, the BTN2-0018 is a superior option in terms of performance, reliability and ease-of-use when compared to cumbersome user-designed bias tees employing off-the-shelf conical inductors. The extremely low cutoff and resonance free operation makes the BTN2-0018 suitable for biasing amplifiers, lasers, and modulators driven with high frequency data patterns.



[Download s-parameters here](#)


Features

- Broadband: 3 MHz to 18 GHz
- Low Insertion Loss
- High Power
- Non-Resonant
- Compact Size

Applications

- Test and Measurement Equipment

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
BTN2-0018	High Power Bias Tee	-	-	RoHS	Released	EAR99

Table Of Contents




■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Electrical Specifications
Functional Block Diagram	Typical Performance
	Typical Performance vs Bias Current at Low frequencies
■ Port Configuration and Functions	Time Domain Plots
Port Functions	
	■ Mechanical Data
■ Revision History	Outline Drawing
	■ Operation
	Application Information

Revision History

Revision Code	Revision Date	Comment
C	2020-10-01	Added Performance Plots vs Bias Current

Port Configuration and Functions

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Common	RF+DC	This port is DC blocked to the RF port and DC connected to the DC port through an internal RF choke	
DC	DC	This port is internally connected to an RF choke which is DC connected to the RF+DC port and DC blocked to the RF port.	
RF	RF	This port is internally DC blocked to the RF+DC and DC ports.	

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
DC Current	2	A
DC Voltage	50	V
RF Power	10	W

Package Information

Parameter	Details	Rating
Weight	-	10g
Dimensions	-	11.94 x 11.94 mm







Electrical Specifications



Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Capacitance	-	-	-	-	100	-	nF
DC Port Isolation	-	1	18	-	30	-	dB
DC Port Isolation	-	0.003	1	-	50	-	dB
DC Resistance	-	-	-	-	0.3	-	Ω
Inductance	-	-	-	-	4.7	-	μH
Insertion Loss	-	0.003	0.01	-	2	-	dB
Insertion Loss	-	0.01	18	-	0.7	1.5	dB
Return Loss	-	0.003	18	-	16	-	dB
Risetime/Falltime ₁	-	-	-	-	10	-	ps
Weight	-	-	-	-	10	-	g




^[1] Specified as 90%/10%. Calculated from $\tau_{bt}^2 = (\tau_{out}^2 - \tau_{in}^2)$

Typical Performance

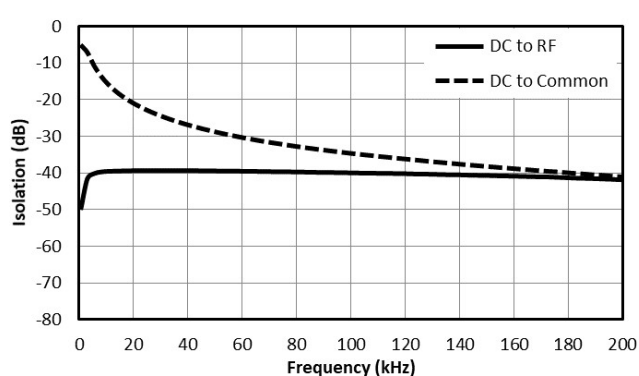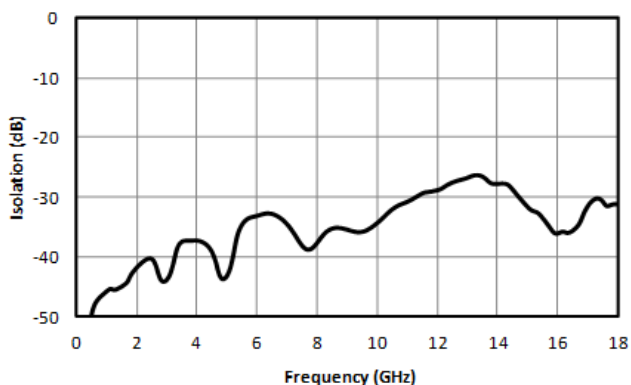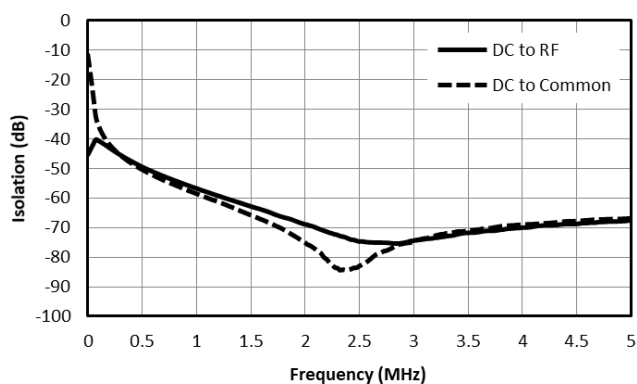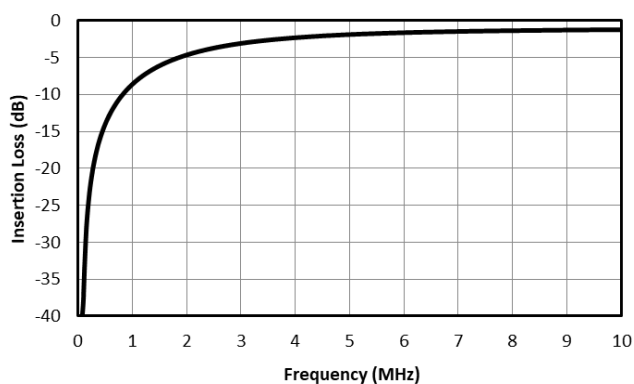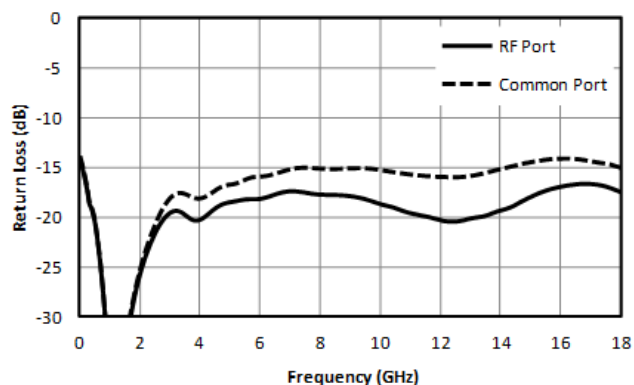
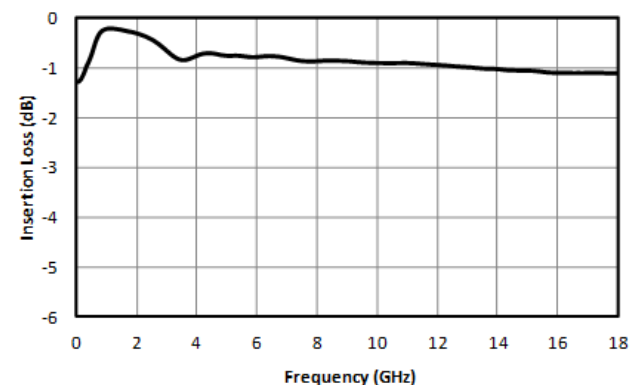


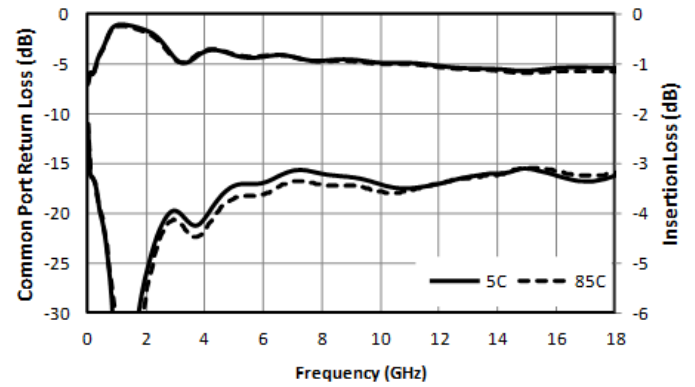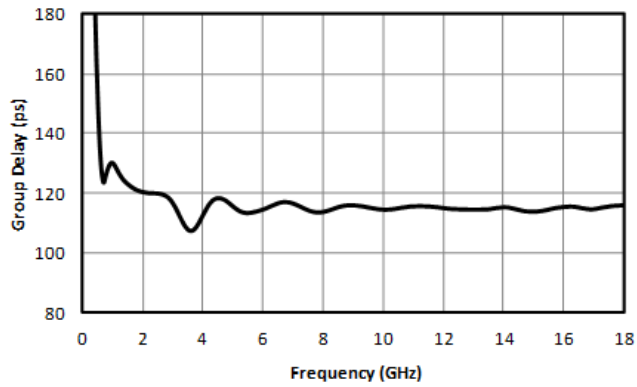


Typical Performance vs Bias Current at Low frequencies

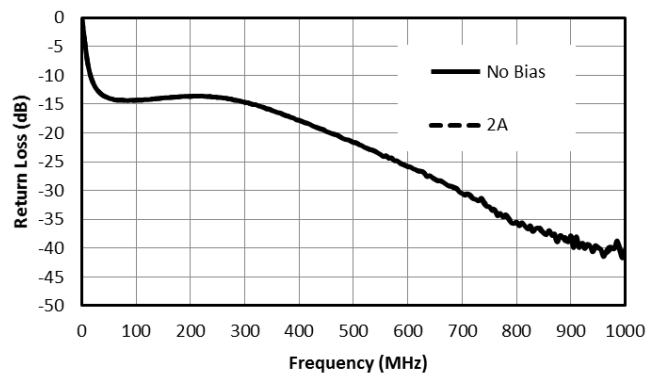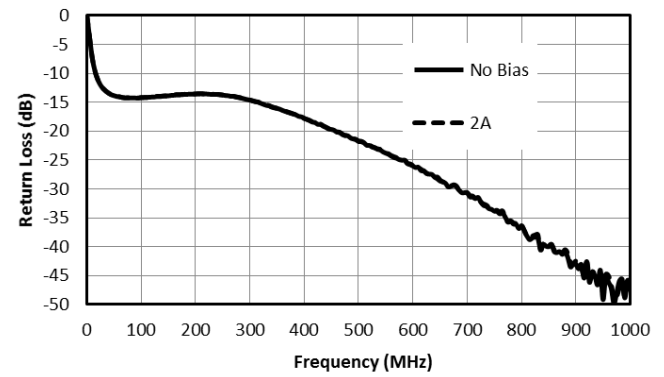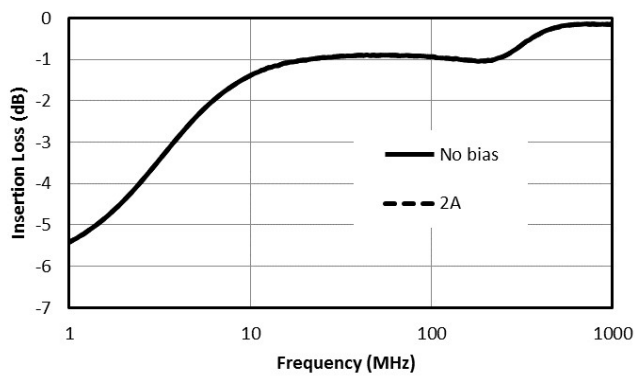

Time Domain Plots




Application Information

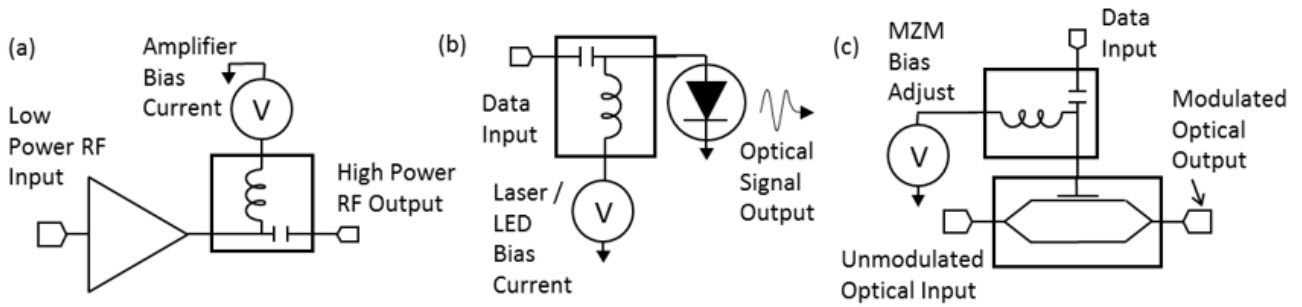

Example Schematics of a) Broadband Microwave Amplifier Biasing, b) Laser/LED Biasing for Data Communication and c) Mach-Zender Modulator Biasing for Data Communication

Mechanical Data

Outline Drawing

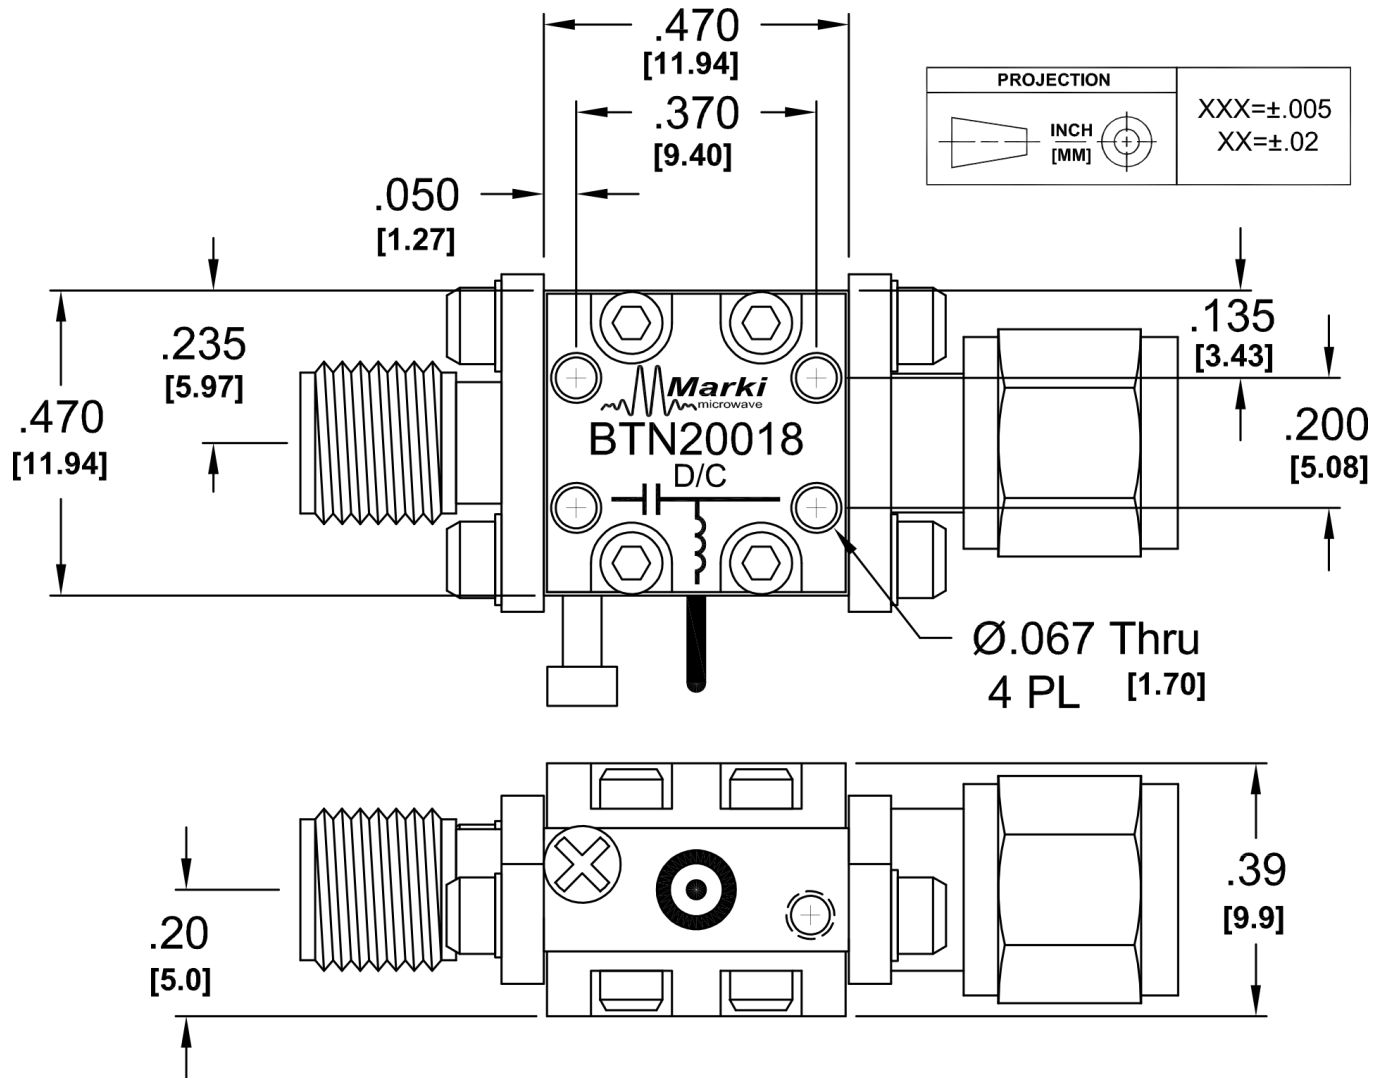

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020, Marki Microwave, Inc