


MM1-1040HPSM-2

GaAs MMIC Double Balanced Mixer

DEVICE OVERVIEW

General Description

The MM1-1040HPSM is a GaAs MMIC double balanced mixer suitable for both up and down-conversion applications. As with all Marki Microwave mixers, it features excellent conversion loss, isolation and spurious performance across a broad bandwidth and in a small form factor. The MM1-1040HPSM is available in a lead-free, RoHS compliant 3x3 mm QFN package and is compatible with standard leaded and lead-free PCB reflow soldering processes. Evaluation boards are also available.




Features

RF/LO response: 10GHz – 40 GHz
 IF response: DC – 12 GHz
 Conversion Loss: 7 dB
 LO to RF Isolation: 45 dB

Applications

- Test and Measurement Equipment
- Electronic Warfare
- 5G
- SATCOM

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MM1-1040HPSM-2	GaAs MMIC Double Balanced Mixer	QFN	-	RoHS	Released	EAR99
EVAL-MM1-1040HP	Evaluation Board, GaAs MMIC 10 - 40 GHz Double Balanced Mixer	-	-	RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
 - Typical Performance Plots: IP3
 - Typical Performance Plots: LO Harmonic Isolation
 - Spur Tables
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Operation**
 - Application Circuit Description


Revision History

Revision Code	Revision Date	Comment
-	2021-06-01	Datasheet Initial Release

Port Configuration and Functions





Port Diagram

A bottom-up view of the MM1-1040HPSM's PSM package outline drawing is shown below. The MM1-1040HPSM has the input and output ports given in Port Functions. The MM1-1040HPSM can be used in either an up or down conversion application. For configuration A, input the LO into pin 2, use pin 8 for the RF, and pin 5 for the IF. For configuration B, input the LO into pin 8, use pin 2 for the RF, and pin 5 for the IF.


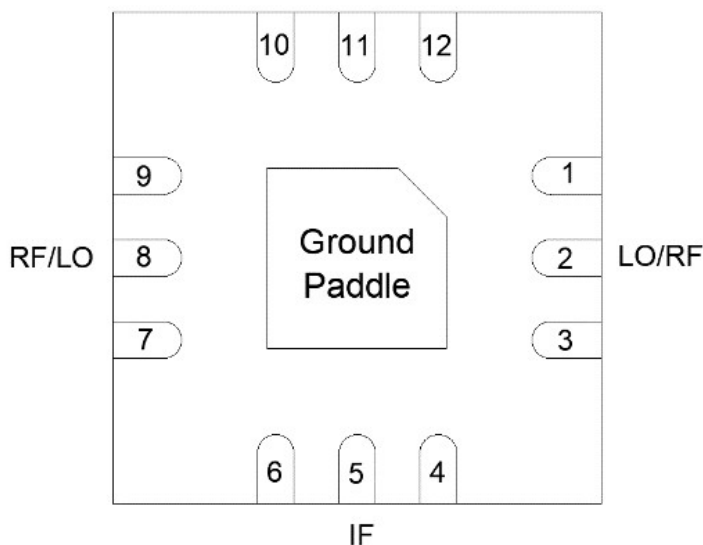


Port Functions

Configuration A

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	PSM package ground path is provided through the ground paddle.	
Pin 2	LO	Pin 2 is DC short and AC matched to 50 Ohms from 10 to 40 GHz.	
Pin 5	IF	Pin 5 is DC coupled to the diodes. Blocking capacitor is optional.	
Pin 8	RF	Pin 8 is DC open and AC matched to 50 Ohms from 10 to 40 GHz.	

Configuration B

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	PSM package ground path is provided through the ground paddle.	
Pin 2	RF	Pin 2 is DC short and AC matched to 50 Ohms from 10 to 40 GHz.	
Pin 5	IF	Pin 5 is DC coupled to the diodes. Blocking capacitor is optional.	
Pin 8	LO	Pin 8 is DC open and AC matched to 50 Ohms from 10 to 40 GHz.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Pin 2 DC Current	15	mA
Pin 5 DC Current	24	mA
Power Handling, at any Port (100°C)	21	dBm
Power Handling, at any Port (25°C)	25	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: QFN	11.4g
Dimensions	-	3x3 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
LO Input Power	12	17	20	dBm
Ambient Temperature	-55	25	100	°C

Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

Electrical Specifications







The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +17 dBm sine wave LO input.





Parameter	Port Configuration	Test Conditions	Min	Typ	Max	Unit
RF Frequency Range	-	-	10	-	40	GHz
LO Frequency Range	-	-	10	-	40	GHz
Conversion Loss ¹	A	RF/LO = 10 - 40 GHz I = 0.2 - 12 GHz	-	9	-	dB
Conversion Loss ²	A	RF/LO = 10 - 40 GHz I = DC - 0.2 GHz	-	7	12	dB
Conversion Loss ³	B	RF/LO = 10 - 40 GHz I = 0.2 - 12 GHz	-	9	-	dB
Conversion Loss ⁴	B	RF/LO = 10 - 40 GHz I = DC - 0.2 GHz	-	8	14	dB
Noise Figure ⁵	A	RF/LO = 10 - 40 GHz I = DC - 0.2 GHz	-	7	-	dB
Noise Figure ⁶	B	RF/LO = 10 - 40 GHz I = DC - 0.2 GHz	-	8	-	dB
Isolation, LO to RF	A	RF/LO = 10 - 40 GHz	-	45	-	dB
Isolation, LO to RF	B	RF/LO = 10 - 40 GHz	-	46	-	dB
Isolation, LO to IF	A	IF/LO = 10 - 40 GHz	-	24	-	dB
Isolation, LO to IF	B	IF/LO = 10 - 40 GHz	-	45	-	dB
Isolation, RF to IF	A	RF/IF = 10 - 40 GHz	-	45	-	dB
Isolation, RF to IF	B	RF/IF = 10 - 40 GHz	-	23	-	dB
Input IP3	A	RF/LO = 10 - 40 GHz I = DC - 0.2 GHz	-	20	-	dBm
Input IP3	B	RF/LO = 10 - 40 GHz I = DC - 0.2 GHz	-	24	-	dBm
Input 1 dB Gain Compression Point (P1dB)	A	-	-	11	-	dBm
Input 1 dB Gain Compression Point (P1dB)	B	-	-	10	-	dBm
IF Frequency Range	-	-	0	-	12	GHz

[1][2][3][4] Measured as a down converter to a fixed 91MHz IF.



[5][6] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.





Typical Performance Plots

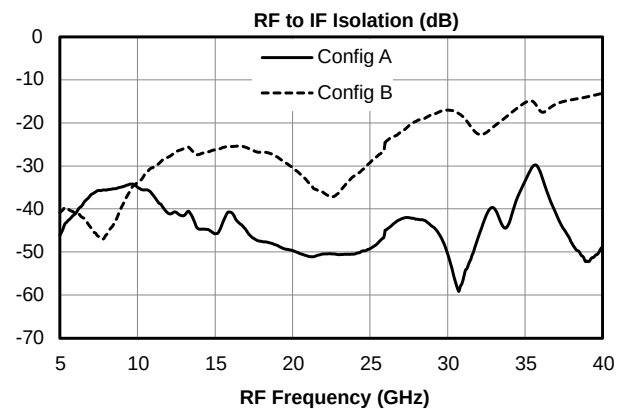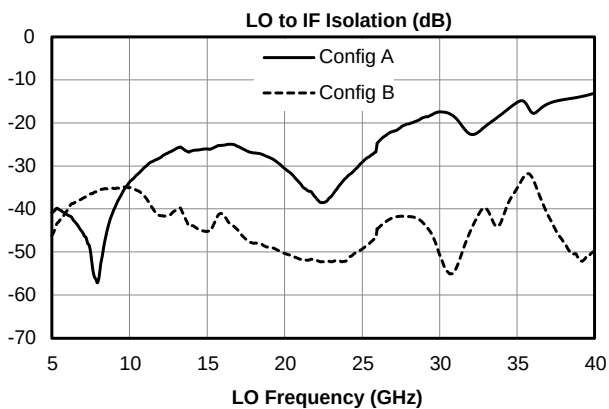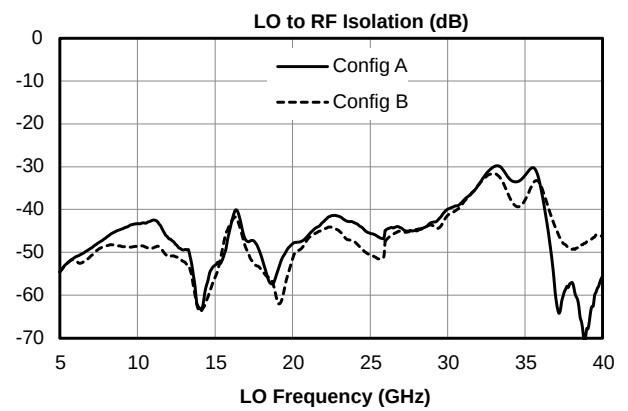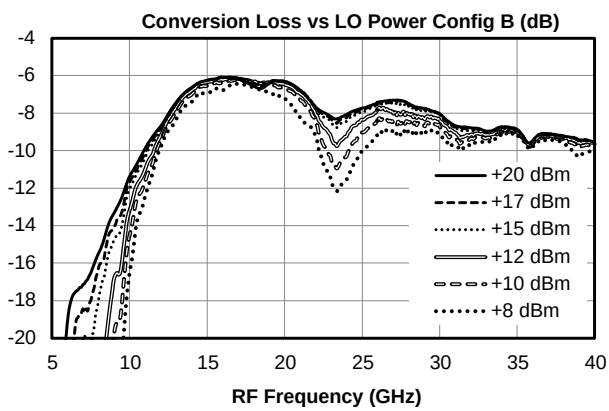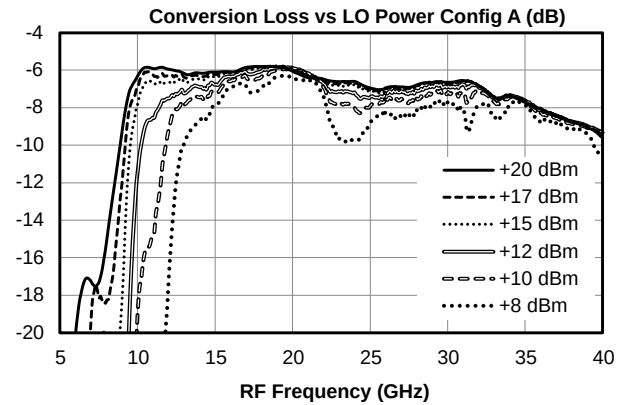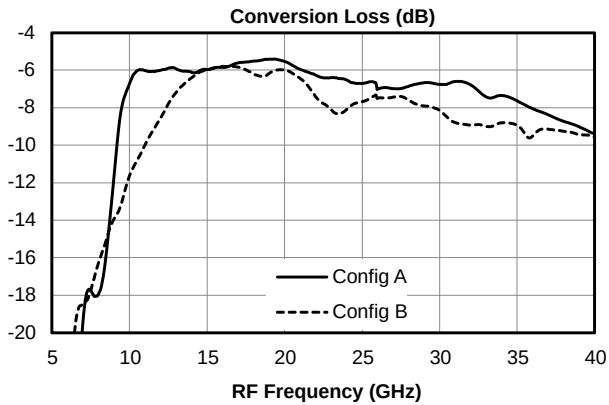

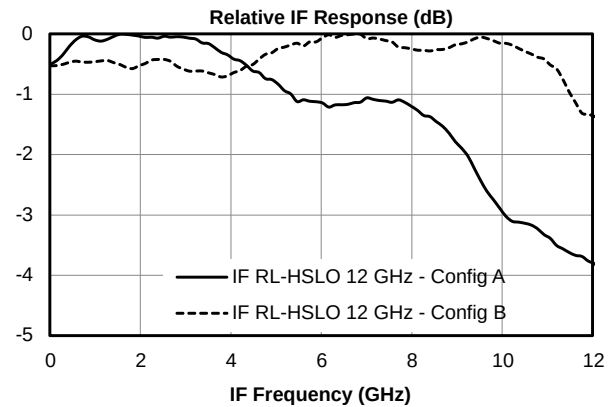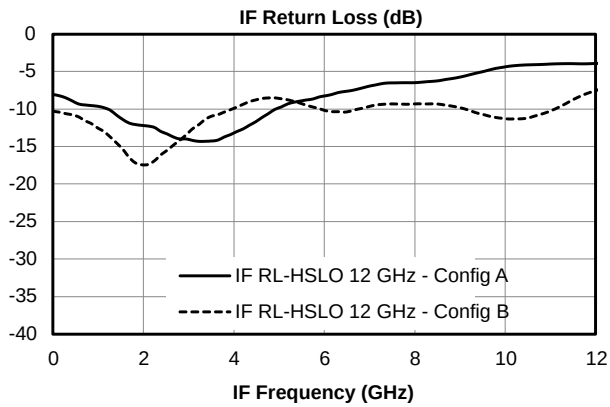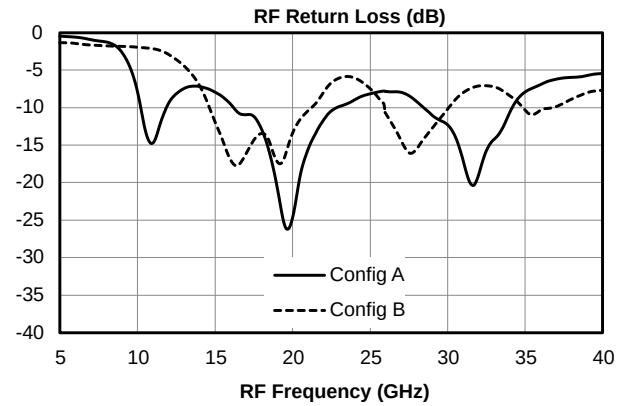
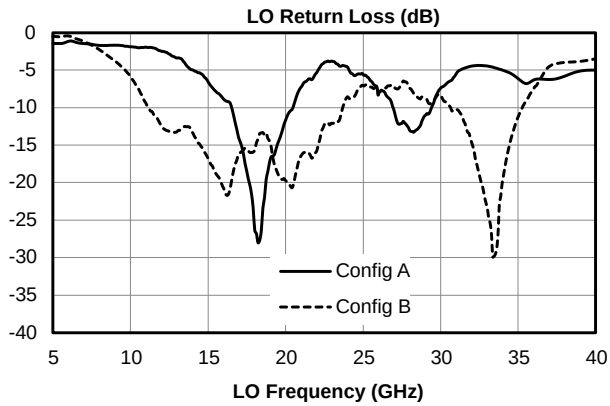






Typical Performance Plots: IP3

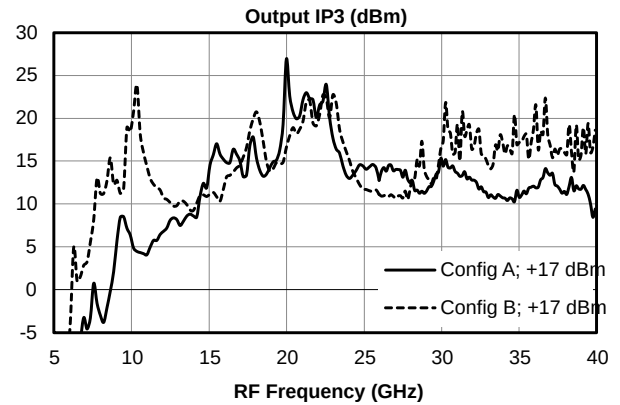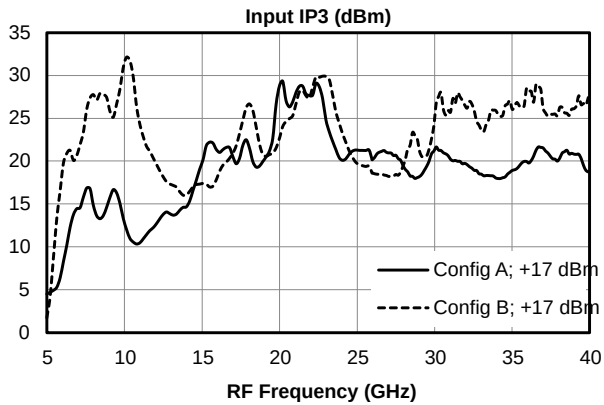

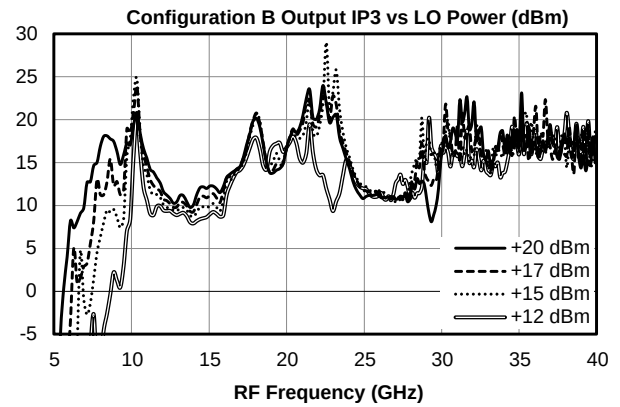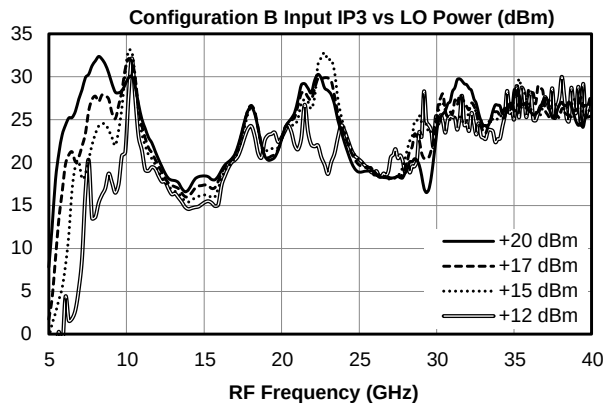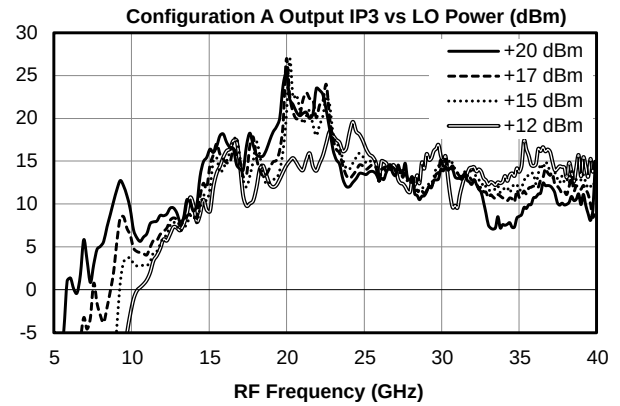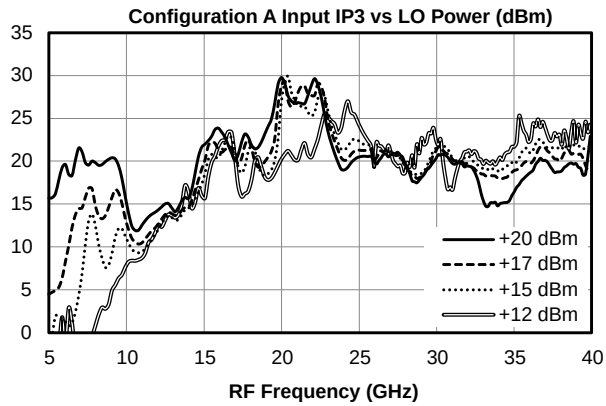

Typical Performance Plots: LO Harmonic Isolation

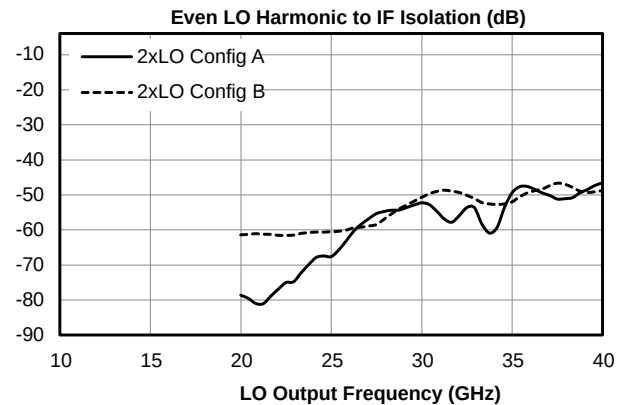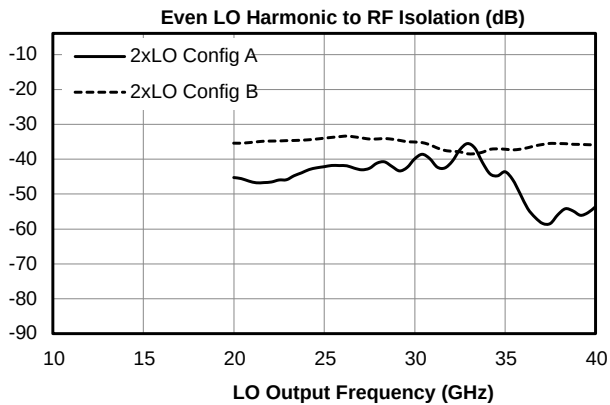

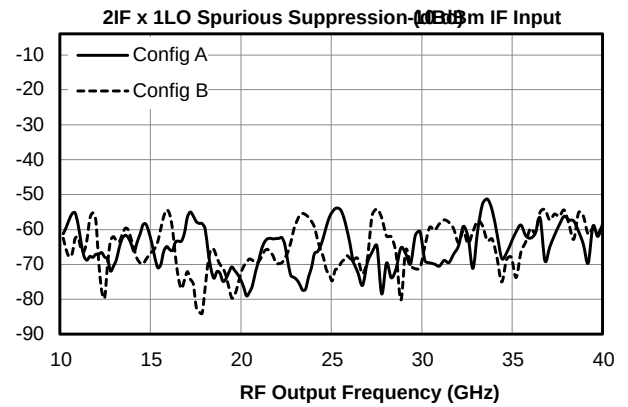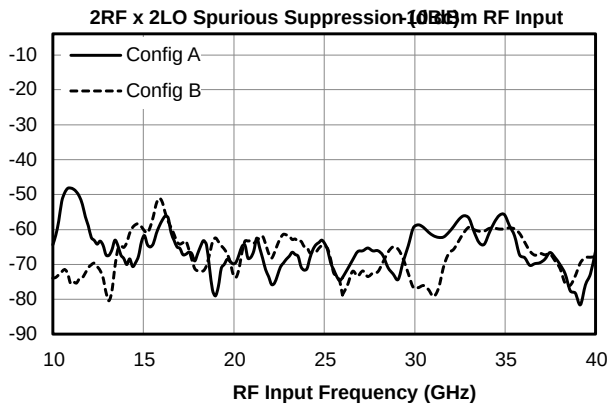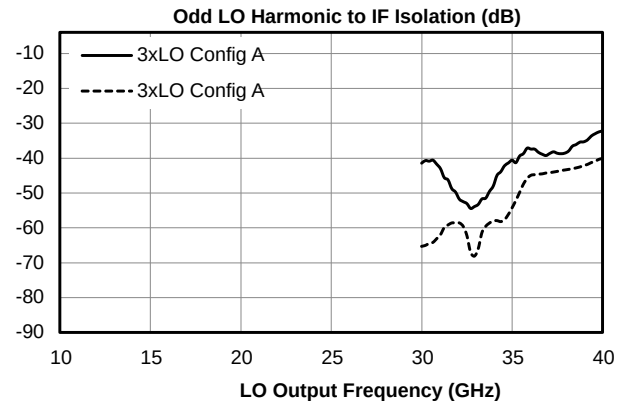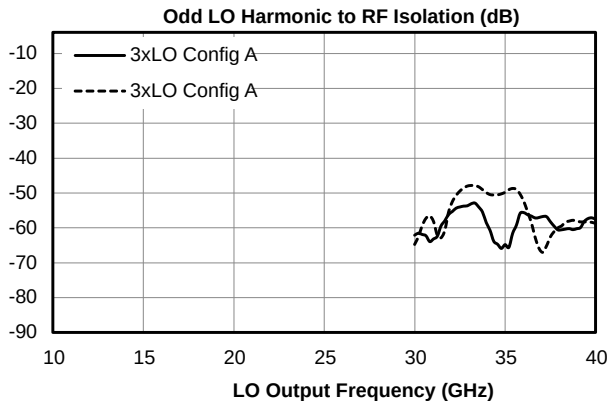

Spur Table

Typical Spurious Performance: Down-Conversion

Typical spurious data is provided by selecting RF and LO frequencies ($\pm m \cdot LO \pm n \cdot RF$) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where "n" is the RF spur order. For example, the 2RF x 2LO spur is 65 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) lower, or 75 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.

Typical Down-conversion spurious suppression (dBc): Config A (B)

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	36 (15)	Reference	33 (36)	15 (15)	N/A	N/A
2xRF	75 (75)	64 (60)	65 (67)	63 (59)	65 (68)	59 (60)
3xRF	95 (91)	64 (76)	81 (88)	70 (74)	83 (87)	65 (69)
4xRF	N/A	N/A	107 (109)	107 (105)	109 (112)	114 (107)
5xRF	N/A	N/A	106 (132)	117 (125)	120 (133)	118 (127)

Typical Spurious Performance: Up-Conversion

Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ($\pm m \cdot LO \pm n \cdot IF$), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by (n-1), where "n" is the IF spur order. For example, the 2IFx1LO spur is typically 66 dBc for a -10 dBm input with a sine-wave LO, so a -20 dBm IF input creates a spur that is (2-1) x (-10 dB) lower, or 76 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.

Typical Up-conversion spurious suppression (dBc): Config A (B)

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xIF	40 (35)	Reference	37 (37)	16 (14)	30 (36)	20 (22)
2xIF	62 (65)	66 (65)	58 (59)	61 (68)	53 (52)	61 (69)
3xIF	88 (90)	72 (68)	75 (78)	58 (68)	71 (77)	57 (67)
4xIF	110 (109)	109 (106)	100 (96)	101 (101)	101 (94)	95 (108)
5xIF	136 (134)	120 (117)	122 (125)	106 (120)	120 (122)	105 (110)

Application Circuit Description

Ports Operation

IF Port – Used as input on an upconversion, output on downconversion, or LO port in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads. Blocking capacitor is recommended if DC voltage is present on the line.

RF Port – Used as input on a downconversion, output on upconversion, or output in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads.



Filtering and Matching- Filtering is generally desired for spurious and image removal on the output port of the mixer. Reflective filters can cause out of band signals to reflect back into the mixer and cause conversion loss ripple, erroneous spurs, and other undesired behaviors. To eliminate these problems it is recommend that the filters be placed as close to the output port as possible. If undesired behavior is still observed, a diplexer with one port terminated or a 1-3 dB attenuator may reduce this problem.

RF Ground – The ground paddle of the QFN should be connected to a low noise RF ground with very low electrical resistance for high frequency operation.

LO Port – The noise floor of the LO input signal should be less than the value of the noise floor plus isolation of the mixer, or a filter is recommended to prevent reduction in dynamic range. An LO amplifier is required if the LO power is below the recommended drive level. It is important to use an amplifier with a broadband 50 ohm match such that it does not reflect spurious signals back into the mixer or other system circuitry.

Mechanical Data

Outline Drawing

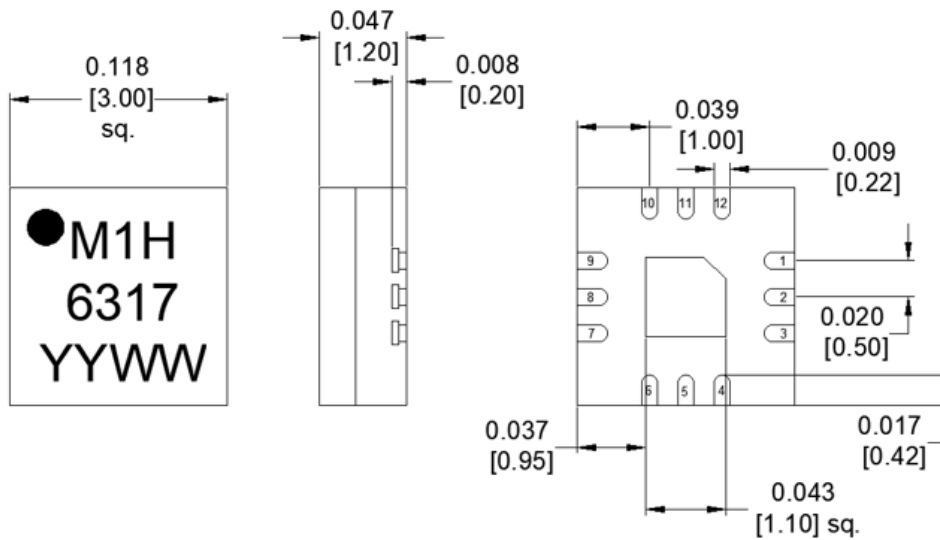


Pin #	Config A	Config B
1	N/C	N/C
2	LO	RF
3	N/C	N/C
4	N/C	N/C
5	IF	IF
6	N/C	N/C
7	N/C	N/C
8	RF	LO
9	N/C	N/C
10	N/C	N/C
11	N/C	N/C
12	N/C	N/C

- Substrate material is LCP.
- I/O Leads and Ground Paddle plating is (from base to finish):



Ni:	0.5 um MIN
Pd:	0.02 um MIN
Au	0.05 um MAX
- All unconnected pins should be connected to PCB RF ground.

Footprint Image

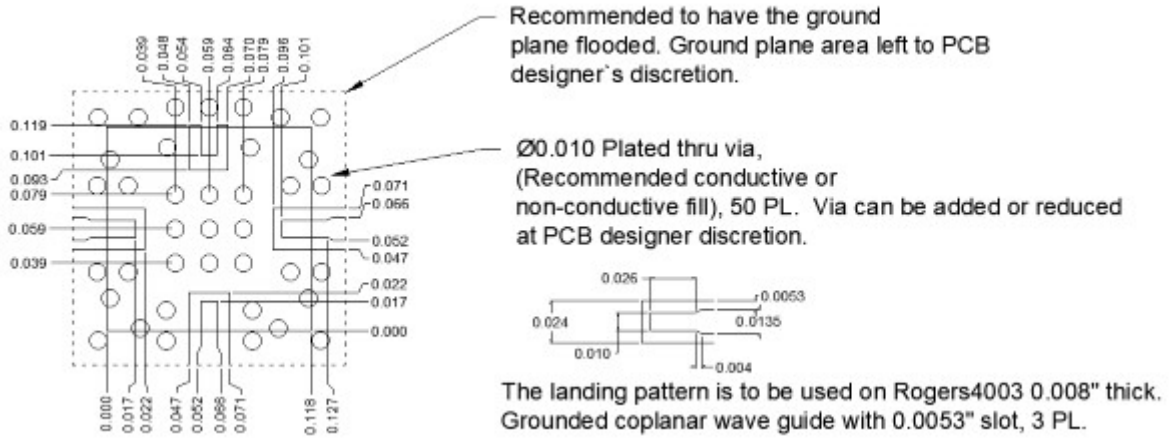


MM1-1040HPSM-2

GaAs MMIC Double Balanced Mixer

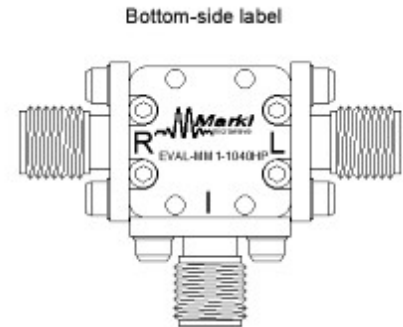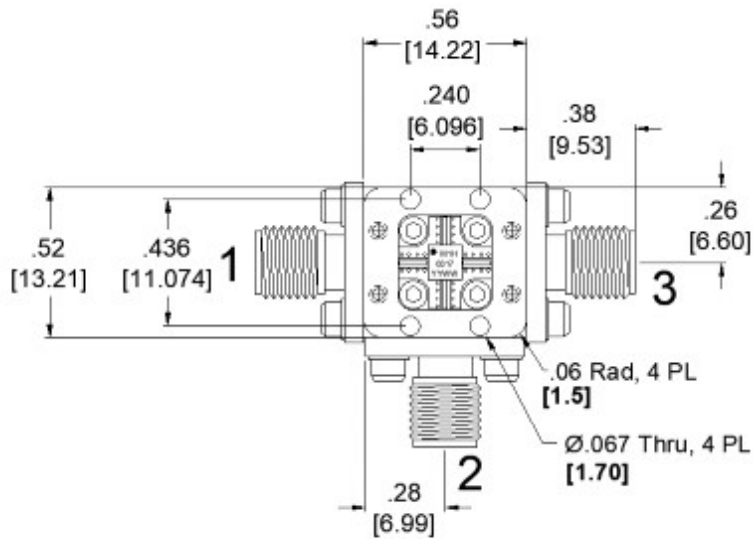

Function	Configuration A Port Number	Configuration B Port Number	Connector Type
LO	1	3	2.92 mm Female
IF	2	2	SMA Female
RF	3	1	2.92 mm Female

Note: Eval Connectors are not removable

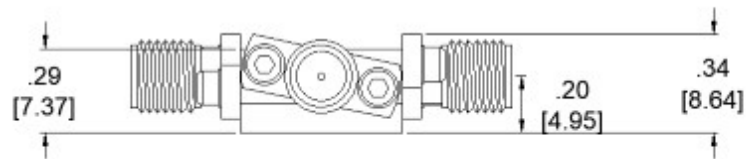

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2021, Marki Microwave, Inc