


MM1A-0832HPSM-2

Double Balanced Mixer/LO Amplifier

DEVICE OVERVIEW

General Description

The MM1A-0832HPSM is a versatile, robust, and broadband double balanced mixer with an integrated broadband LO driver amplifier. The MM1A-0832HPSM is ideal for applications with wide bandwidths and operation at mmWave frequencies. The integrated LO driver amplifier allows for operation with LO powers as low as -6 dBm while retaining exceptional conversion loss and linearity.




Features

RF/LO response: 8GHz - 32GHz
 IF response: DC – 12GHz
 Conversion Loss: 9 dB
 Minimum LO drive: -6 dBm

Applications

- Test and Measurement Equipment
- SATCOM
- Radar
- 5G

Functional Block Diagram

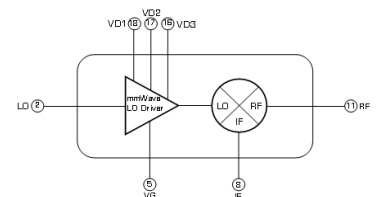

Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
EVB-MM1A-0832HP	Evaluation Board, Double Balanced Mixer/LO Amplifier	-	-	RoHS	Released	EAR99
MM1A-0832HPSM-2	Double Balanced Mixer/LO Amplifier	QFN	-	RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
 - Spur Tables
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**
- **Operation**
 - Application Circuit
 - Application Circuit Description


Revision History

Revision Code	Revision Date	Comment
-	2022-09-01	Datasheet Initial Release








Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MM1A-0832HPSM's PSM Package outline drawing is shown below. The MM1A-0832HPSM has the input and output ports given in Port Functions.

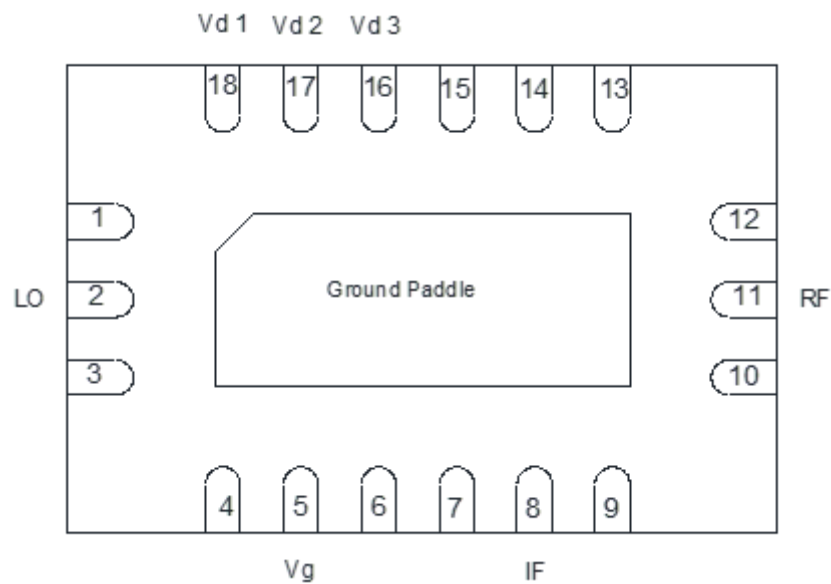

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	Ground paddle and non-connected pins must be connected to a DC/RF ground potential with high thermal and electrical conductivity, and low inductance.	
Pin 11	RF	Pin 11 is DC open and AC matched to 50 Ohms from 8 to 32 GHz. Blocking capacitor is optional.	
Pin 16	Positive DC Supply Vd3	Pin 16 provides +2.5V to +4V DC voltage to the amplifier's third stage. Negative voltage must be supplied to Pin 5 before turning on the positive supply voltage.	
Pin 17	Positive DC Supply Vd2	Pin 17 provides +2.5V to +4V DC voltage to the amplifier's second stage. Negative voltage must be supplied to Pin 5 before turning on the positive supply voltage.	
Pin 18	Positive DC Supply Vd1	Pin 18 provides +2.5V to +4V DC voltage to the amplifier's first stage. Negative voltage must be supplied to Pin 5 before turning on the positive supply voltage.	
Pin 2	LO	Pin 2 is the input of the integrated LO driver amplifier and is matched to 50 ohms. It is internally DC blocked.	
Pin 5	Negative DC Supply Vg	Pin 5 requires -0.4V to -0.6V of DC voltage. This must be turned on before turning on the positive supply voltage to Pin 5.	
Pin 8	IF	Pin 8 is DC coupled to the diodes. Blocking capacitor is optional.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. All limits are individual and should not be met in parallel, doing so will degrade the lifetime of the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
DC Voltage on VD	4.5	V
DC Voltage on VG	-2	V
LO Power Handling	20	dBm
Maximum Operating Temperature	85	°C
Maximum Storage Temperature	125	°C
Max Junction Temperature for MTTF > 1E6 hours	175	°C
Minimum Operating Temperature	-40	°C
Minimum Storage Temperature	-65	°C
Positive Drain Supply Current with RF Input (Id)	450	mA
RF Power Handling	25	dBm
θ_{JC} , Junction to Case Thermal Resistance	94	°C/W

Package Information

Parameter	Details	Rating
Dimensions	-	3x4.6 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Positive DC Voltage (Vd)	2.5	3	4	V
Gate Bias DC Voltage (Vg)	-0.6	-0.5	-0.4	V
Saturated Current Consumption	-	250	330	mA
Quiescent Current Consumption	-	170	-	mA
LO Input Power	-6	6	6	dBm
Ambient Temperature	-40	25	85	°C

Sequencing Requirements

Turn-on Procedure:

1. Apply Vg (Pin 5)
2. Apply Vd (Pin 16, Pin 17, Pin 18)

Turn-off Procedure:

1. Turn off Vd (Pin 16, Pin 17, Pin 18)
2. Turn off Vg (Pin 5)

Note: LO power can be injected at any moment in the bias sequencing procedure

Electrical Specifications







The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +6dBm LO input to the integrated LO driver amp biased at +3Vd1/+3Vd2/+3Vd3/-0.5Vg unless otherwise specified.

Parameter	Test Conditions	Min	Typ	Max	Unit
RF Frequency Range	-	8	-	32	GHz
LO Frequency Range	-	8	-	32	GHz
Conversion Loss ¹	RF/LO = 8 - 32 GHz I = 0.2 - 12 GHz	-	11	14	dB
Conversion Loss ²	RF/LO = 8 - 32 GHz I = DC - 0.2 GHz	-	9	-	dB
Noise Figure ³	RF/LO = 8 - 32 GHz I = DC - 0.2 GHz	-	9	-	dB
Input IP3	RF/LO = 8 - 32 GHz I = DC - 2 GHz	-	24	-	dBm
IF Frequency Range	-	0	-	12	GHz
Input 1 dB Gain Compression Point (P1dB)	-	-	9	-	dBm
RF to IF Isolation	RF/LO = 8 - 32 GHz	-	39	-	dB

^{[1][2]} Measured as a down converter to a fixed 91 MHz IF.







^[3] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.

Typical Performance Plots

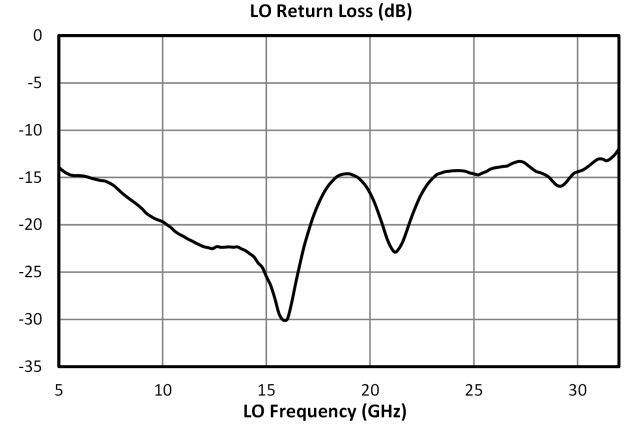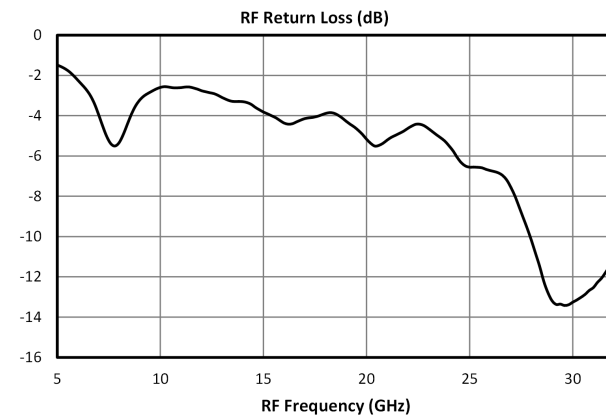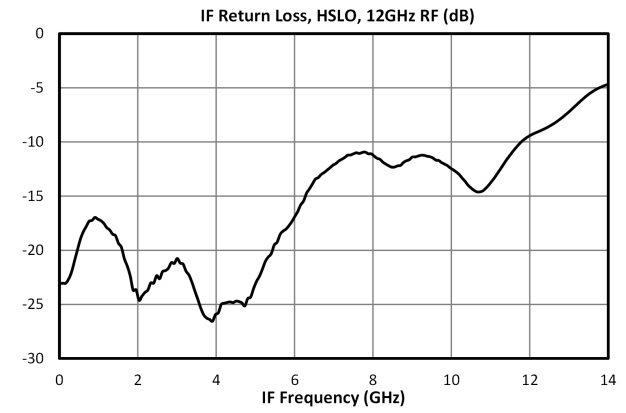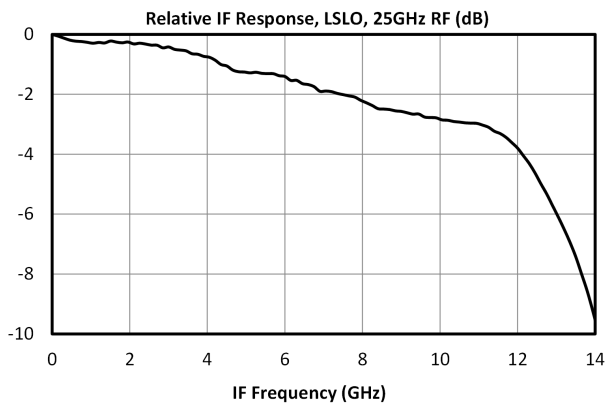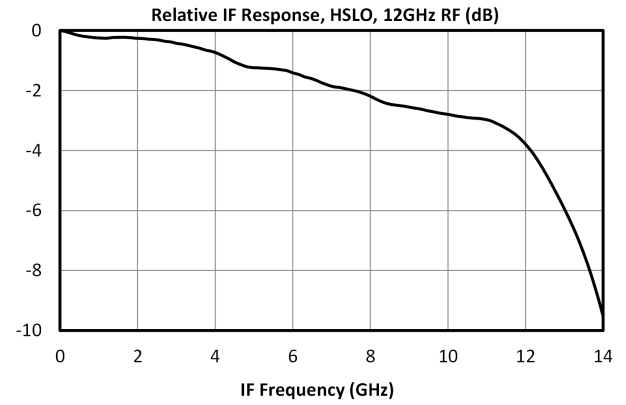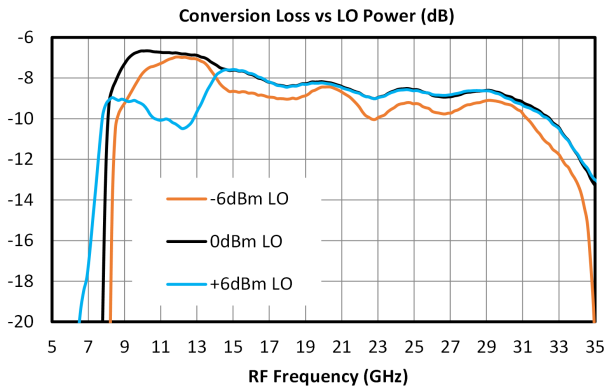


MM1A-0832HPSM-2


Double Balanced Mixer/LO Amplifier

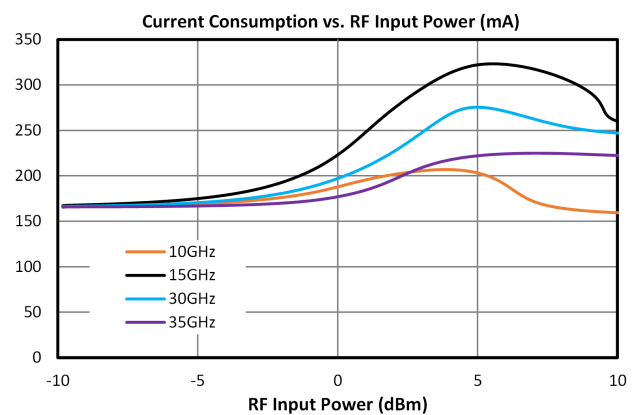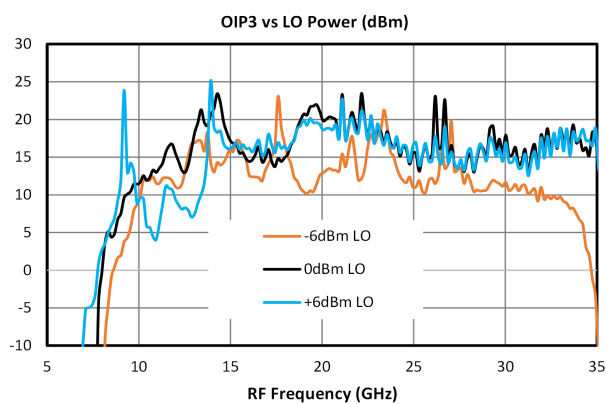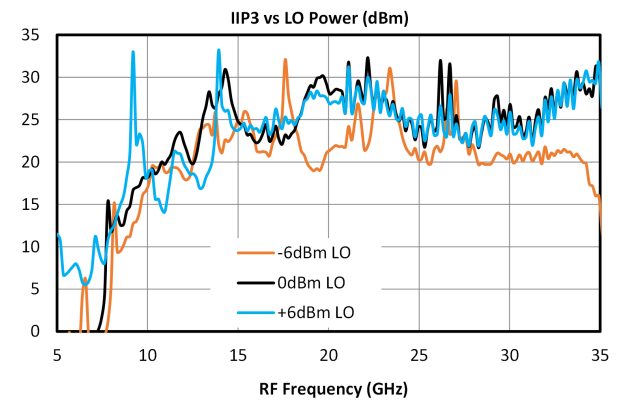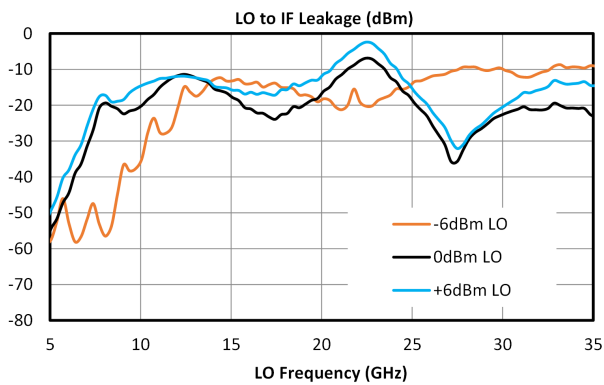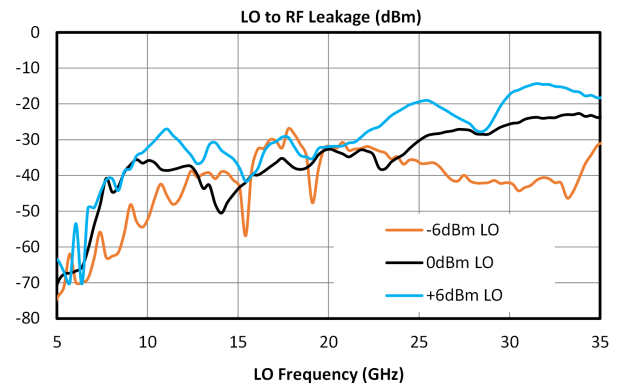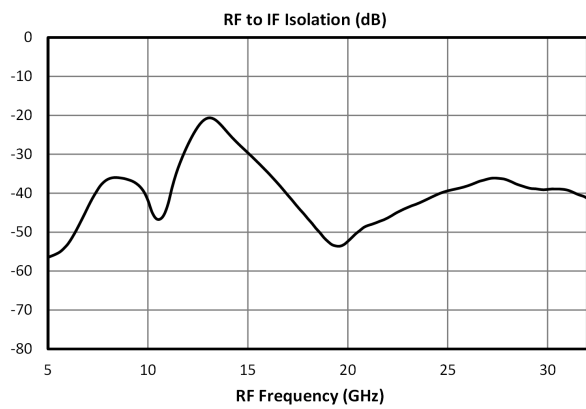


Even LO Harmonic to RF Leakage (dBm)

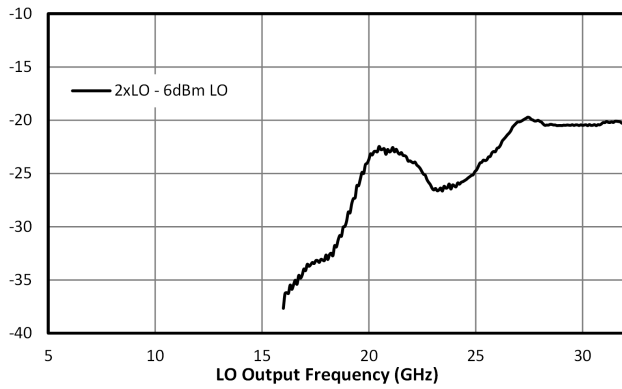


Even LO Harmonic to IF Leakage (dBm)

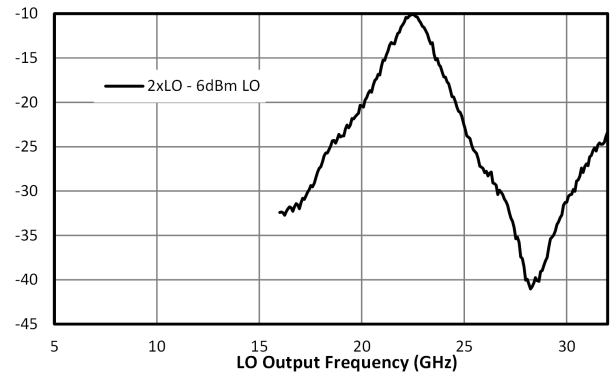


Odd LO Harmonic to RF Leakage (dBm)

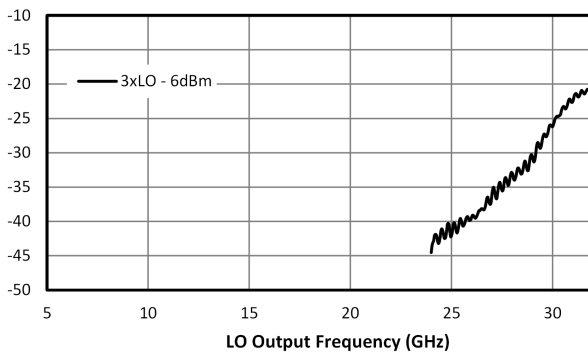


Odd LO Harmonic to IF Leakage (dBm)

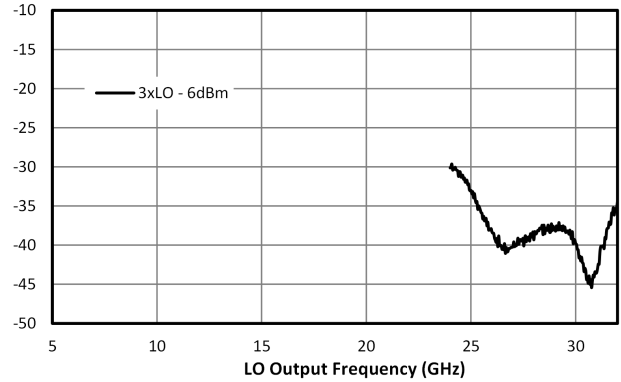

2RF x 2LO Spurious Suppression (dBc) -10 RF dBm input

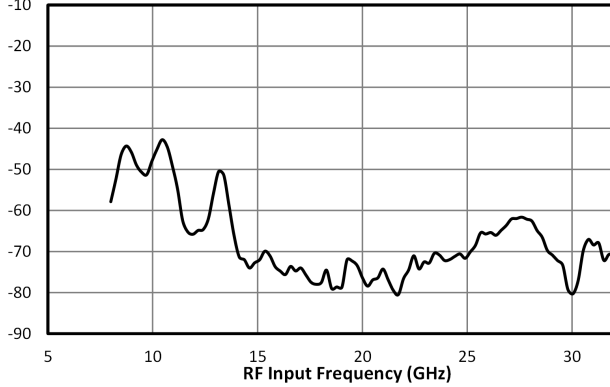

2IF x 1LO Spurious Suppression (dBc) -10 dBm IF Input

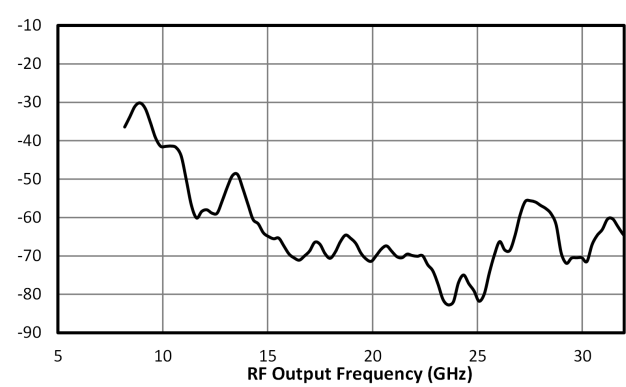

Spur Table

Typical Spurious Performance: Down-Conversion

Typical spurious data is provided by selecting RF and LO frequencies ($\pm m \cdot \text{LO} \pm n \cdot \text{RF}$) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by $(n-1)$, where “n” is the RF spur order. For example, the $2\text{RF} \times 2\text{LO}$ spur is 65 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ lower, or 75 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.

Typical Down-conversion spurious suppression (dBc)

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	29	Reference	10	14	27	N/A
2xRF	86	65	65	63	60	58
3xRF	104	53	84	80	83	74
4xRF	N/A	N/A	113	113	111	114
5xRF	N/A	N/A	110	132	134	134


Typical Spurious Performance: Up-Conversion

Typical spurious data is taken by mixing an input within the IF band, with LO frequencies ($\pm m \cdot \text{LO} \pm n \cdot \text{IF}$), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by $(n-1)$, where “n” is the IF spur order. For example, the $2\text{IF} \times 1\text{LO}$ spur is typically 63 dBc for a -10 dBm input with a sine-wave LO, so a -20 dBm IF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ lower, or 73 dBc. Data is shown for the frequency plan in 3.6 Typical Performance.

Typical Up-conversion spurious suppression (dBc)

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xIF	32	Reference	11	11	15	15
2xIF	71	63	56	48	47	46
3xIF	88	70	62	61	56	57
4xIF	119	106	94	89	86	86
5xIF	143	124	111	111	109	105

Application Circuit

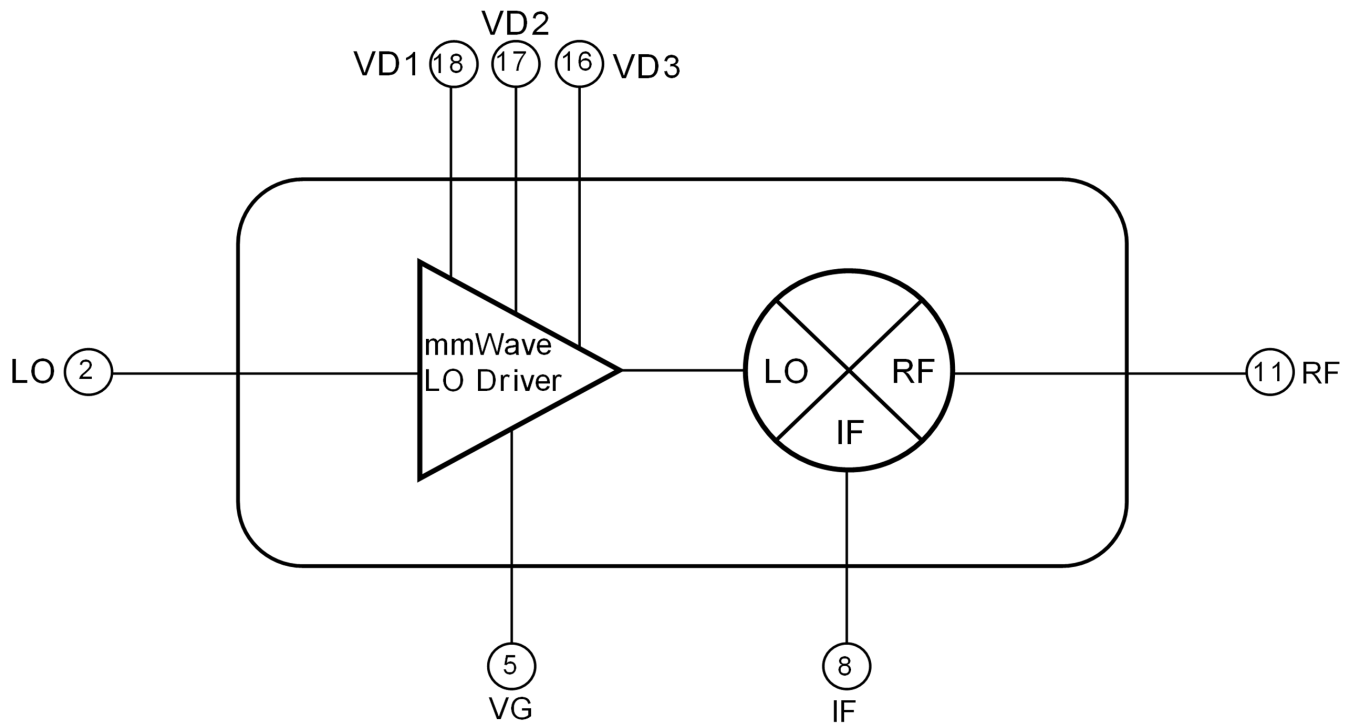

Application Circuit Description

Ports Operation

IF Port – Used as input on an upconversion, output on downconversion, or LO port in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads.

RF Port – Used as input on a downconversion, output on upconversion, or output in a band shifting application. Signals should be connected by 50 ohm microstrip or coplanar traces to well matched broadband 50 ohm sources and loads.


LO Port – The noise floor of the LO input signal should be less than the value of the noise floor plus isolation of the mixer, or a filter is recommended to prevent reduction in dynamic range. An integrated LO amplifier is included, allowing for superior performance with LO power below the typical recommended drive level.

Filtering and Matching- Filtering is generally desired for spurious and image removal on the output port of the mixer. Reflective filters can cause out of band signals to reflect back into the mixer and cause conversion loss ripple, erroneous spurs, and other undesired behaviors. To eliminate these problems it is recommended that the filters be placed as close to the output port as possible. If undesired behavior is still observed, a diplexer with one port terminated or a 1-3 dB attenuator may reduce this problem.

RF Ground – The ground paddle of the QFN should be connected to a low noise RF ground with very low electrical resistance for high frequency operation.

Mechanical Data

Outline Drawing

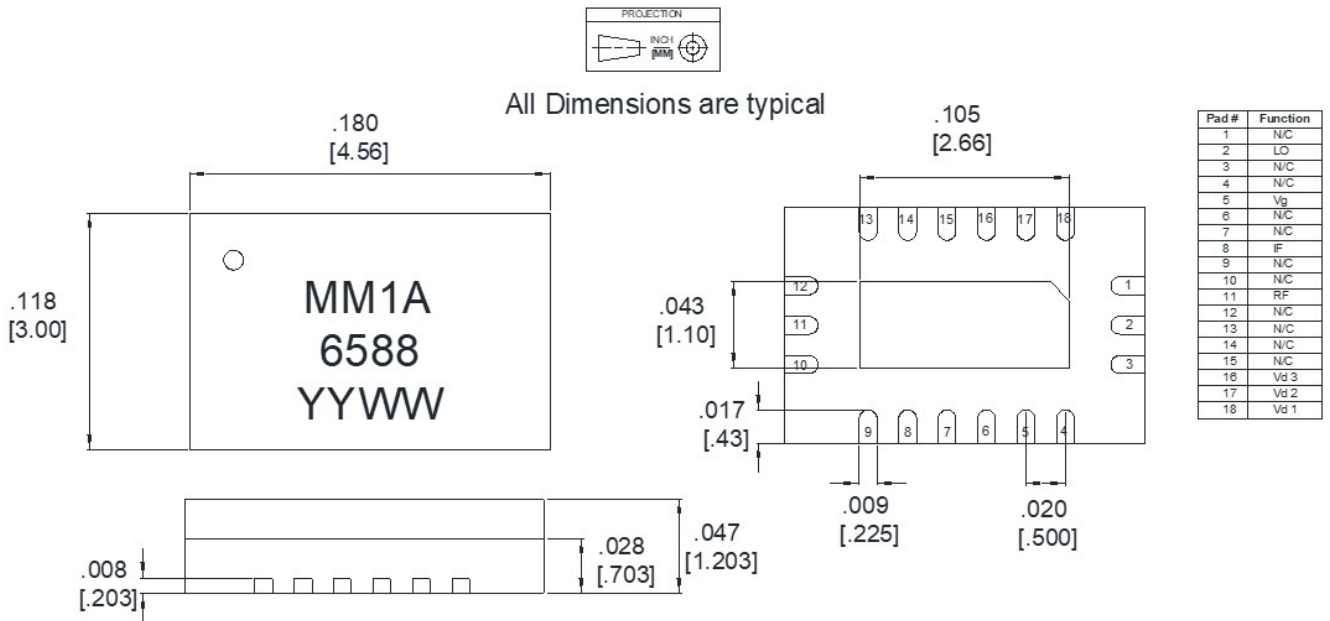


1. Substrate material is LCP.
2. I/O Leads and Die Paddle are: 0.003 microns Gold (MIN)
0.08 - 0.15 microns Palladium|
0.5 - 2.0 microns Nickel.
3. All unconnected pins should be connected to PCB RF ground.

MM1A-0832HPSM-2


Double Balanced Mixer/LO Amplifier

Footprint Image

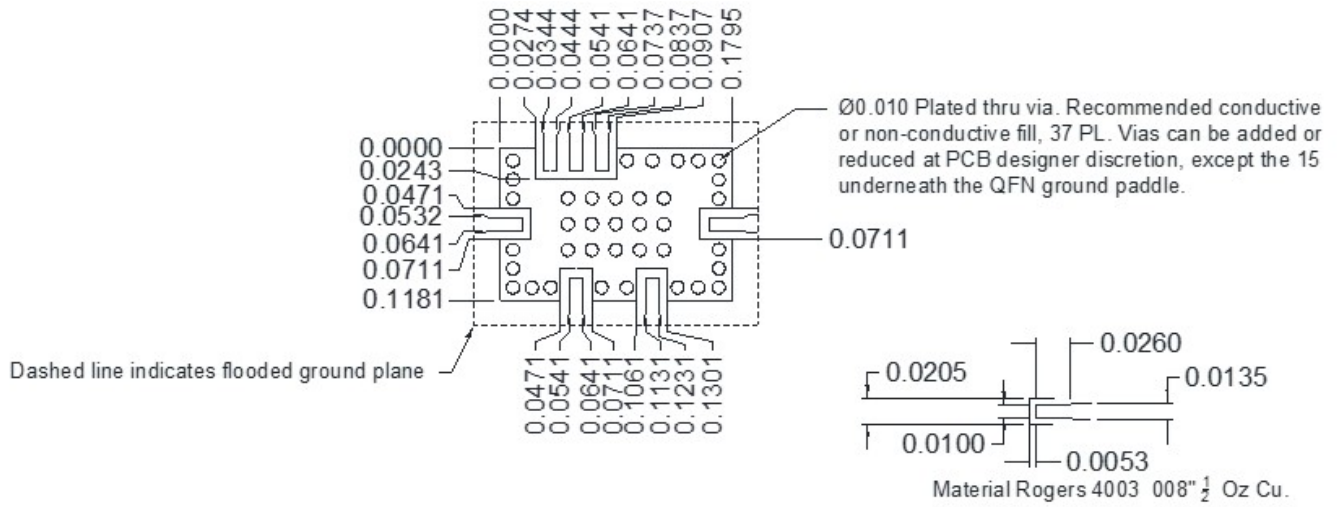

MM1A-0832HPSM-2

Double Balanced Mixer/LO Amplifier

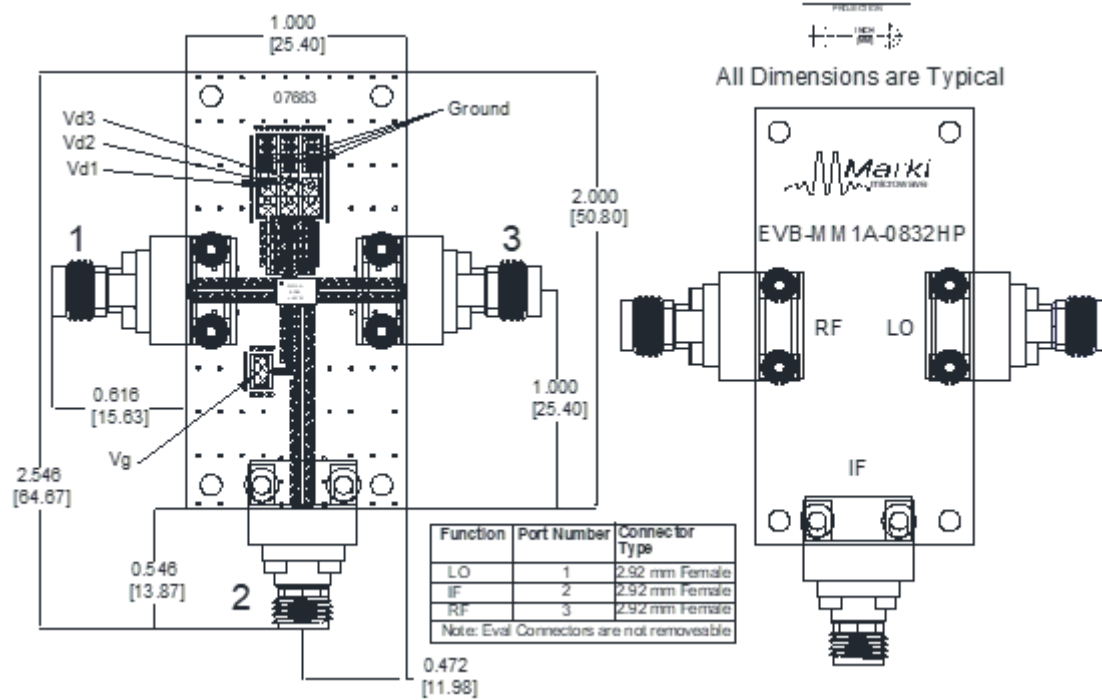

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2022, Marki Microwave, Inc