


## MMIQ-0626LCH-2

### Low LO Drive Passive GaAs MMIC IQ Mixer

## DEVICE OVERVIEW

### General Description

MMIQ-0626L is a low LO drive, passive GaAs MMIC IQ mixer that operates down to an unrivaled +3 dBm LO drive level. This is an ultra-broadband mixer spanning 6 to 26 GHz on the RF and LO ports with an IF from DC to 6 GHz. Up to 40 dB of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid. Both wire bondable die and connectorized modules are available.




### Features

N/A

### Applications

- Single Sideband and Image Rejection Mixing
- IQ Modulation / Demodulation
- Vector Amplitude Modulation
- Band Shifting

### Functional Block Diagram



### Part Ordering Options

| Part Number        | Description                             | Package | Packing Size | Green Status | Product Lifecycle | Export Classification |
|--------------------|-----------------------------------------|---------|--------------|--------------|-------------------|-----------------------|
| MMIQ-0626LCH-2     | Low LO Drive Passive GaAs MMIC IQ Mixer | CH      | -            | RoHS         | Released          | EAR99                 |
| <u>MMIQ-0626LS</u> | Low LO Drive Passive GaAs MMIC IQ Mixer | S       | -            | RoHS         | Released          | EAR99                 |

### Table Of Contents

|                                           |                                                  |
|-------------------------------------------|--------------------------------------------------|
| ■ <b>Device Overview</b>                  | ■ <b>Specifications</b>                          |
| General Description                       | Absolute Maximum Ratings                         |
| Features                                  | Package Information                              |
| Applications                              | Recommended Operating Conditions                 |
| Functional Block Diagram                  | Sequencing Requirements                          |
| ■ <b>Port Configuration and Functions</b> | Electrical Specifications                        |
| Port Diagram                              | Typical Performance Plots                        |
| Port Functions                            | Typical Performance Plots: IP3                   |
| ■ <b>Revision History</b>                 | Typical Performance Plots: P1dB                  |
|                                           | Typical Performance Plots: LO Harmonic Isolation |
|                                           | Typical Performance Plots: Band Shifter          |
|                                           | Typical Performance Plots: Vector Modulator      |
|                                           | Spur Tables                                      |
|                                           | ■ <b>Die Mounting Recommendations</b>            |
|                                           | Mounting and Bounding Recommendations            |
|                                           | ■ <b>Mechanical Data</b>                         |
|                                           | Outline Drawing                                  |
|                                           | ■ <b>Operation</b>                               |
|                                           | Application Circuit                              |
|                                           | Application Circuit Description                  |


### Revision History

| Revision Code | Revision Date | Comment                          |
|---------------|---------------|----------------------------------|
| -             | 2017-08-01    | Datasheet Initial Release        |
| A             | 2017-09-01    | Minor Clarification/Text Changes |
| B             | 2017-10-01    | Correction to spurious response  |
| C             | 2018-07-01    | Correction to OIP3 Graph         |
| D             | 2019-08-01    | Changed I/Q Max Current Rating   |
| E             | 2019-10-01    | Updated Max Power Handling       |
| F             | 2022-08-01    | Updated I/Q Port Diagrams        |

### Port Configuration and Functions

#### Port Diagram

A top-down view of the MMIQ-0626L's CH-2 package outline drawing is shown below. The mixer may be operated as either a downconverter or an upconverter. Use of the RF or IF as the input or output port will depend on the application. See Application Information for input and output port configuration for common applications.

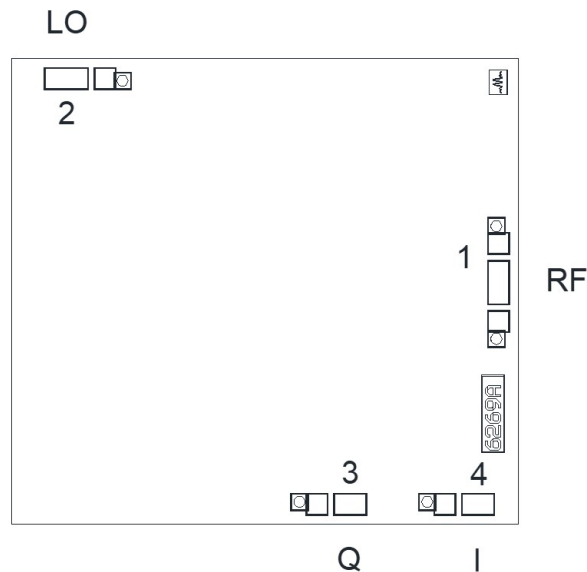

#### Port Functions

| Port   | Function          | Description                                                                              | Equivalent Circuit for Package                                                                   |
|--------|-------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| GND    | Ground            | CH package ground path is taken through the substrate.                                   | <b>GND</b>  |
| Port 1 | RF Input / Output | Port 1 is DC short and AC matched to 50Ω over the specified RF frequency range.          | <b>P1</b>   |
| Port 2 | LO Input          | Port 2 is DC open and AC matched to 50Ω over the specified LO frequency range.           | <b>P2</b>   |
| Port 3 | Q Input / Output  | Port 3 is diode coupled and AC matched to 50Ω over the specified I port frequency range. | <b>P3</b>   |
| Port 4 | I Input / Output  | Port 4 is diode coupled and AC matched to 50Ω over the specified Q port frequency range. | <b>P4</b>   |

### Specifications

#### Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

| Parameter                     | Maximum Rating | Unit |
|-------------------------------|----------------|------|
| Maximum Operating Temperature | 100            | °C   |
| Maximum Storage Temperature   | 125            | °C   |
| Minimum Operating Temperature | -55            | °C   |
| Minimum Storage Temperature   | -65            | °C   |
| Port 3 DC Current             | 30             | mA   |
| Port 4 DC Current             | 30             | mA   |
| Power Handling, at any Port   | 26             | dBm  |

#### Package Information

| Parameter  | Details            | Rating       |
|------------|--------------------|--------------|
| ESD        | 250 to < 500 Volts | HBM Class 1A |
| Dimensions | -                  | 2.28x2.09mm  |

#### Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

| Parameter           | Min | Nominal | Max | Unit |
|---------------------|-----|---------|-----|------|
| LO Input Power      | 3   | 9       | 13  | dBm  |
| Ambient Temperature | -55 | 25      | 100 | °C   |
| RF/IF Input Power   | -   | -       | 2   | dBm  |

### Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

### Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for a down conversion application with a +9dBm sine wave LO input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C. All bare die are 100% DC tested and visually inspected.

| Parameter                            | Test Conditions                          | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ  | Max | Unit |
|--------------------------------------|------------------------------------------|-------------------------|-------------------------|-----|------|-----|------|
| RF Frequency Range                   | -                                        | -                       | -                       | 6   | -    | 26  | GHz  |
| LO Frequency Range                   | -                                        | -                       | -                       | 6   | -    | 26  | GHz  |
| Conversion Loss <sup>1</sup>         | RF/LO = 6 - 24 GHz<br>I = DC - 0.2 GHz   | 6                       | 24                      | -   | 12   | 15  | dB   |
| Conversion Loss <sup>2</sup>         | RF/LO = 6 - 24 GHz<br>Q = DC - 0.2 GHz   | 6                       | 24                      | -   | 12   | 15  | dB   |
| Conversion Loss <sup>3</sup>         | RF/LO = 6 - 26 GHz<br>I = 0.2 - 6 GHz    | 6                       | 26                      | -   | 14   | -   | dB   |
| Conversion Loss <sup>4</sup>         | RF/LO = 6 - 26 GHz<br>Q = 0.2 - 6 GHz    | 6                       | 26                      | -   | 14   | -   | dB   |
| Conversion Loss <sup>5</sup>         | RF/LO = 24 - 26 GHz<br>I = DC - 0.2 GHz  | 24                      | 26                      | -   | 14   | 17  | dB   |
| Conversion Loss <sup>6</sup>         | RF/LO = 24 - 26 GHz<br>Q = DC - 0.2 GHz  | 24                      | 26                      | -   | 13   | 16  | dB   |
| Noise Figure <sup>7</sup>            | RF/LO = 6 - 24 GHz<br>I = DC - 0.2 GHz   | 6                       | 24                      | -   | 12   | -   | dB   |
| Noise Figure <sup>8</sup>            | RF/LO = 6 - 24 GHz<br>Q = DC - 0.2 GHz   | 6                       | 24                      | -   | 12   | -   | dB   |
| Image Rejection <sup>9</sup>         | RF/LO = 6 - 26 GHz<br>I+Q = DC - 0.2 GHz | 6                       | 26                      | -   | 35   | -   | dBc  |
| Input IP3 <sup>10</sup>              | RF/LO = 6 - 26 GHz<br>I = DC - 0.2 GHz   | 6                       | 26                      | -   | 14.2 | -   | dBm  |
| Amplitude Balance                    | -                                        | -                       | -                       | -   | 0.5  | -   | dB   |
| Phase Balance                        | -                                        | -                       | -                       | -   | 2    | -   | °    |
| IF Frequency Range                   | -                                        | -                       | -                       | 0   | -    | 6   | GHz  |
| Input 1 dB Gain Compression Point, I | -                                        | -                       | -                       | -   | 6.1  | -   | dBm  |
| Input 1 dB Gain Compression Point, Q | -                                        | -                       | -                       | -   | 6.1  | -   | dBm  |
| Q (Port 3) Frequency Range           | -                                        | -                       | -                       | 0   | -    | 6   | GHz  |
| Isolation, LO to IF                  | IF/LO = 6 - 26 GHz                       | 6                       | 26                      | -   | 50   | -   | dB   |
| Isolation, LO to RF                  | RF/LO = 6 - 26 GHz                       | 6                       | 26                      | -   | 41   | -   | dB   |
| Isolation, RF to IF                  | RF/IF = 6 - 26 GHz                       | 6                       | 26                      | -   | 36   | -   | dB   |

[1][2][3][4][5][6] Measured as an I/Q down converter. (i.e., I and Q powers are not combined)

[7][8] Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.

[9] Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.

[10] Typical IIP3 measured with I and Q ports combined with an external quadrature hybrid coupler.





### Typical Performance Plots

The test conditions and frequency plan below applies to all following sections, unless otherwise specified.

| Parameter                            |                  | Port | Start | Nominal | Stop   | Units |
|--------------------------------------|------------------|------|-------|---------|--------|-------|
| RF Input Frequency                   |                  | 1    | 0     |         | 30     | GHz   |
| RF Input Power                       |                  |      |       | -10     |        | dBm   |
| LO Input Frequency                   |                  | 2    | 0.091 |         | 30.091 | GHz   |
| LO Input Power                       |                  |      |       | +9      |        | dBm   |
| IF Output Frequency                  | Q                | 3    |       | 91      |        | MHz   |
|                                      | I                | 4    |       | 91      |        |       |
|                                      | I+Q <sup>7</sup> | 3+4  |       | 91      |        |       |
| T <sub>A</sub> , Ambient Temperature |                  |      |       | +25     |        | °C    |
| Z <sub>0</sub> , System Impedance    |                  |      |       | 50      |        | Ω     |







I output means that the IF output signal is measured at the I port of the mixer and the Q port is loaded. Q output means the IF output signal is measured at the Q port of the mixer while the I port is loaded.

<sup>7</sup> I+Q measurements taken with an external quadrature hybrid attached to the I and Q ports of the mixer. Orientation depends on up conversion or down conversion measurement.

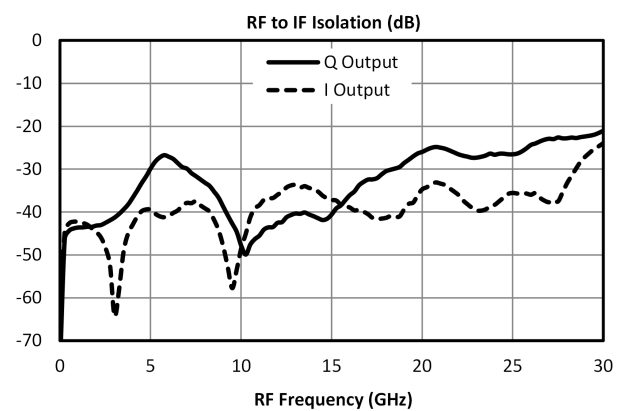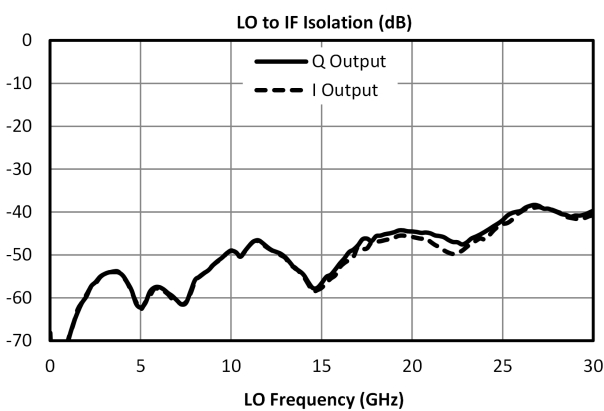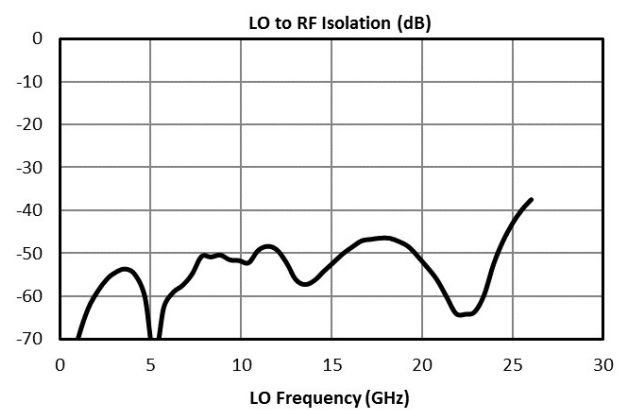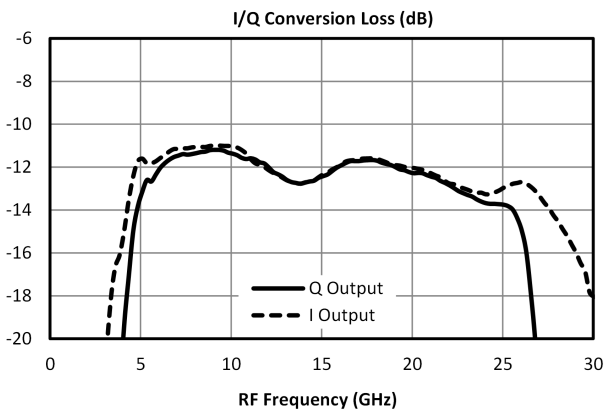







## MMIQ-0626LCH-2

### Low LO Drive Passive GaAs MMIC IQ Mixer

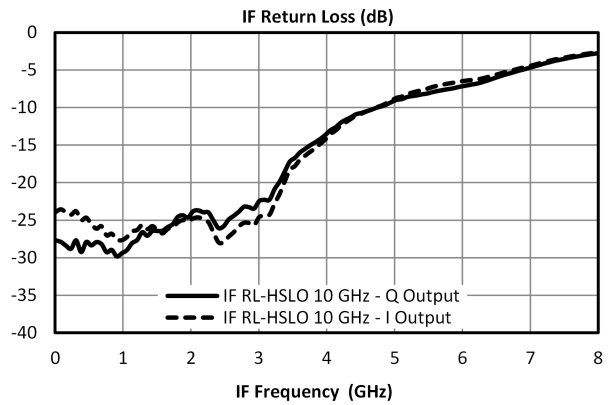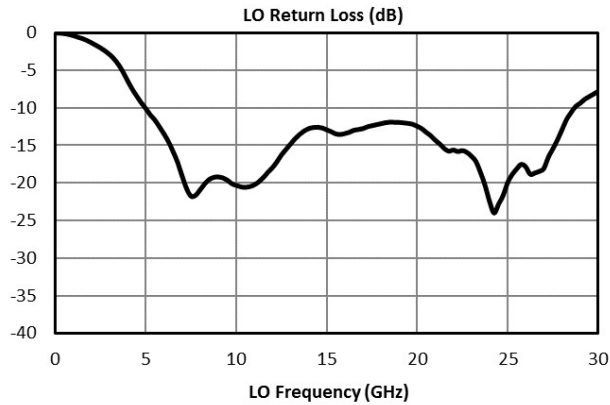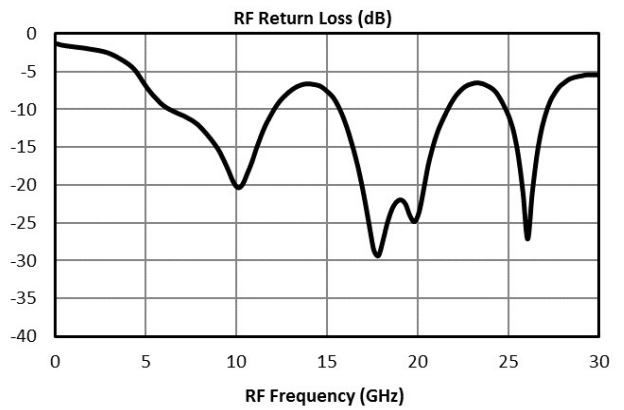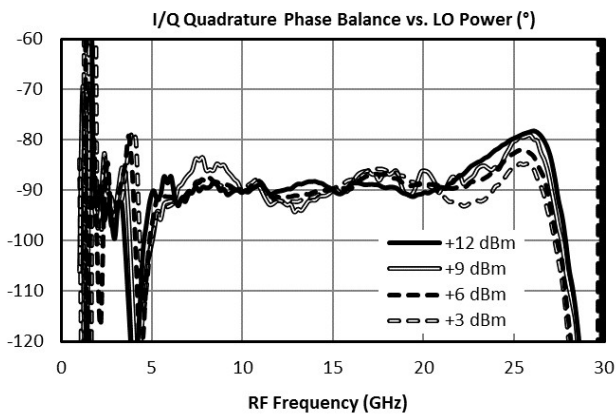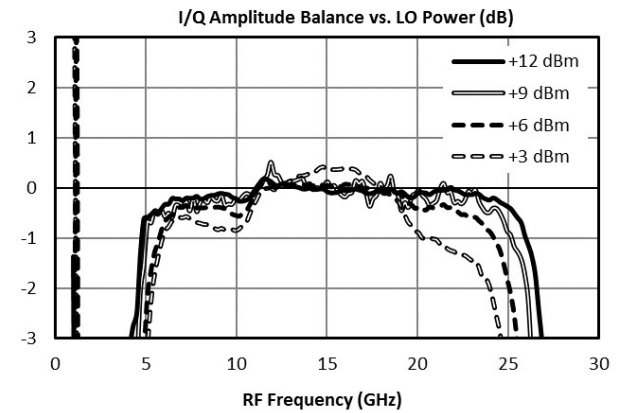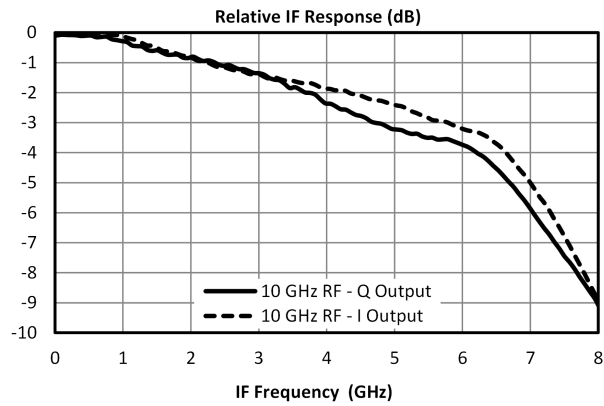



## MMIQ-0626LCH-2

### Low LO Drive Passive GaAs MMIC IQ Mixer

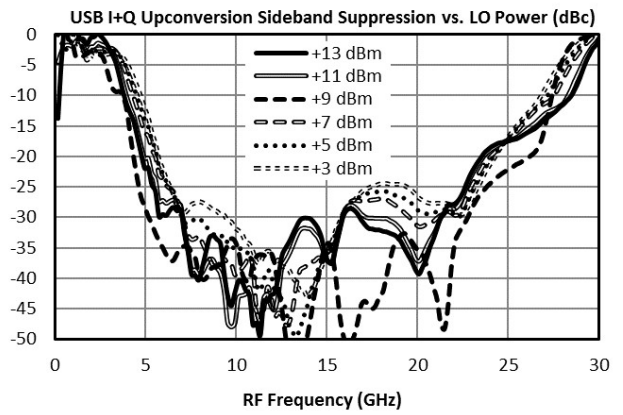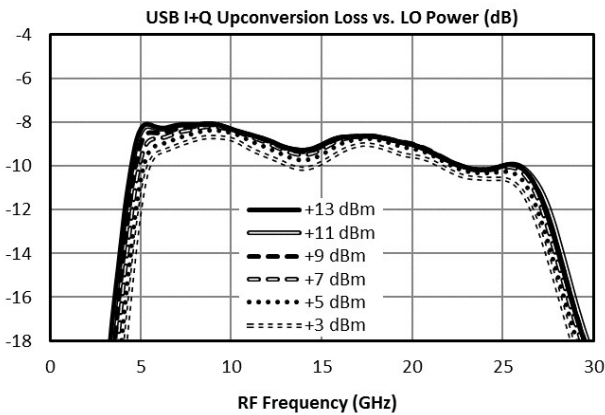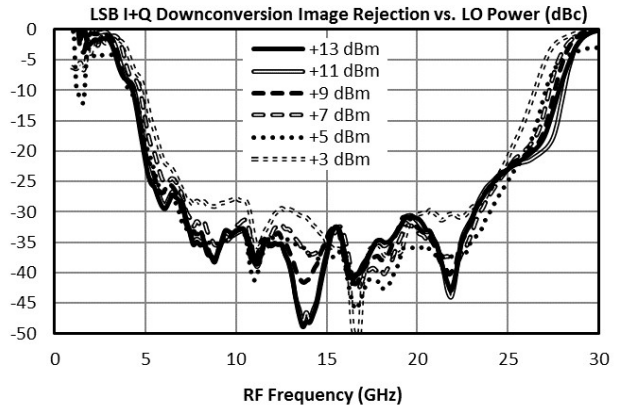
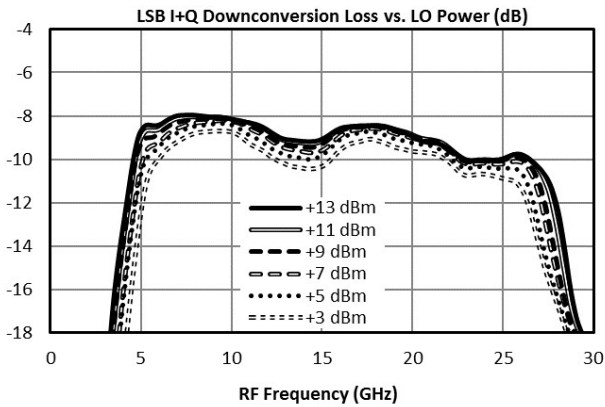
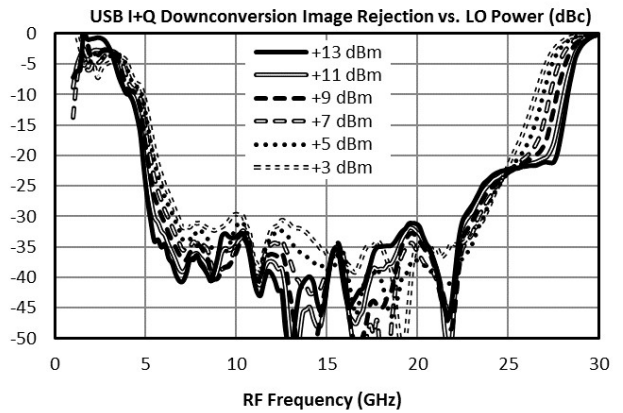
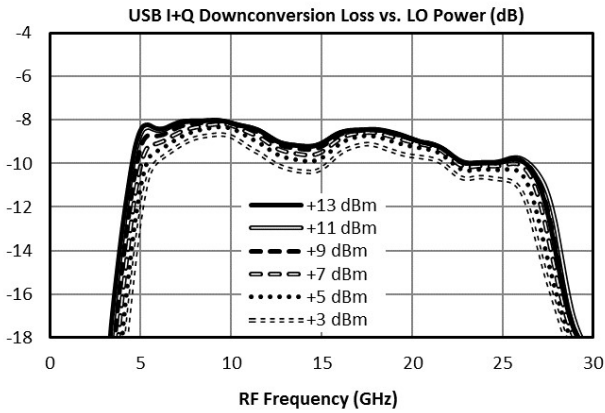


## MMIQ-0626LCH-2

Low LO Drive Passive GaAs MMIC IQ Mixer

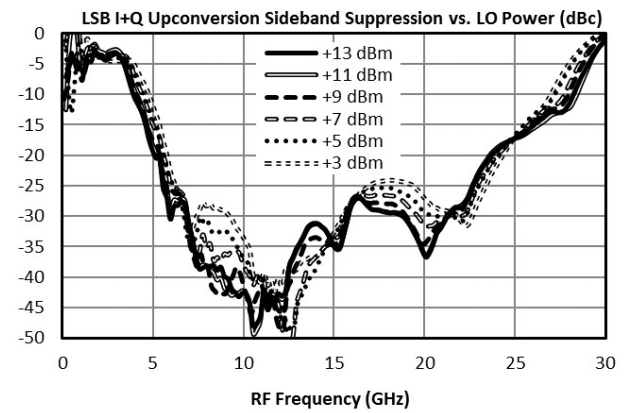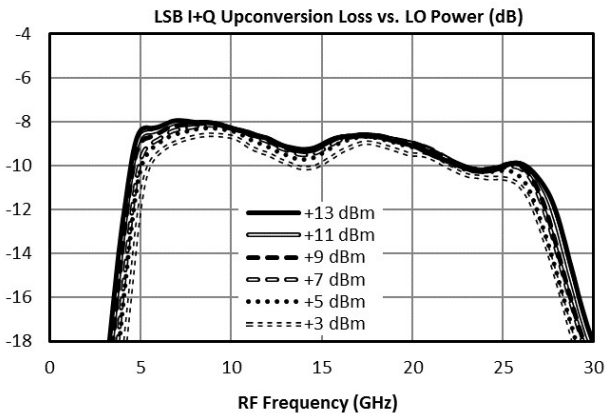



### Typical Performance Plots: IP3

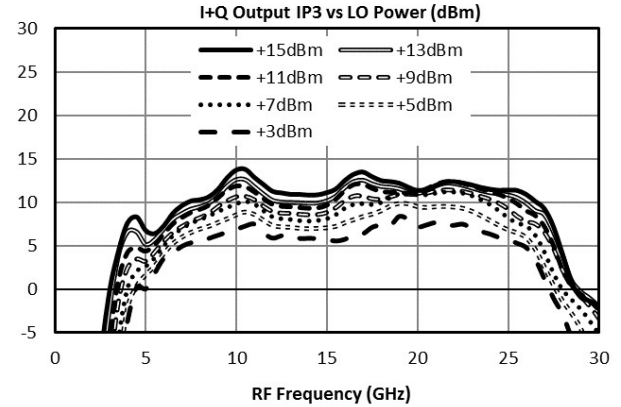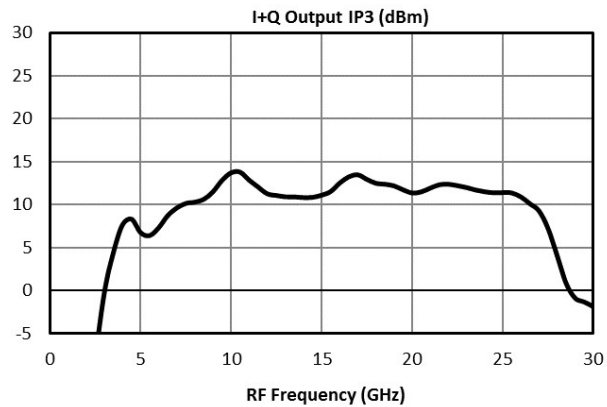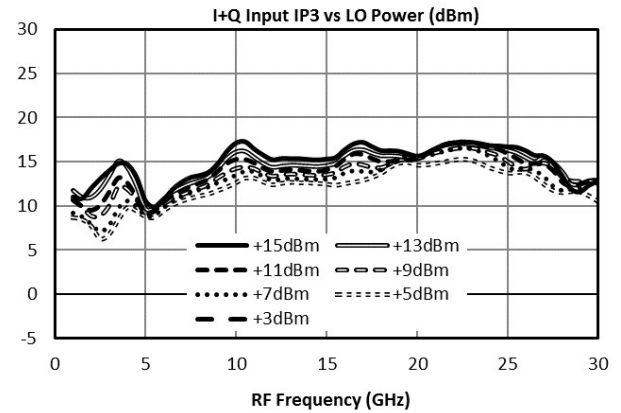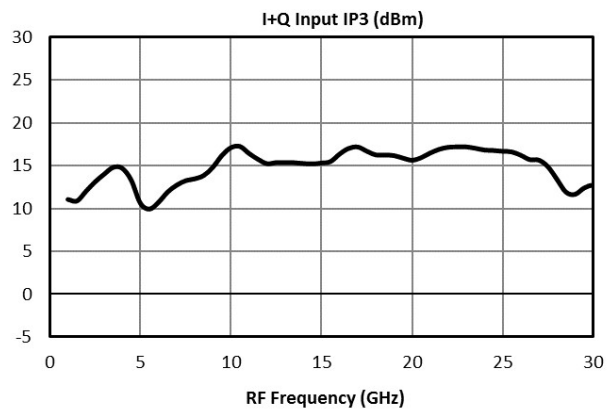

### Typical Performance Plots: P1dB

Input 1dB compression point (P1dB) plots are taken with the following test conditions and frequency plan:

| Parameter                            |   | Port | Start | Nominal | Stop | Units |
|--------------------------------------|---|------|-------|---------|------|-------|
| RF Input Frequency                   |   | 1    |       | 10      |      | GHz   |
| RF Input Power                       |   |      | -4    |         | +10  | dBm   |
| LO Input Frequency                   |   | 2    |       | 10.091  |      | GHz   |
| LO Input Power                       |   |      | +3    | +9      | +17  | dBm   |
| IF Output Frequency                  | Q | 3    |       | 91      |      | MHz   |
|                                      | I | 4    |       | 91      |      |       |
| T <sub>A</sub> , Ambient Temperature |   |      |       | +25     |      | °C    |
| Z <sub>0</sub> , System Impedance    |   |      |       | 50      |      | Ω     |

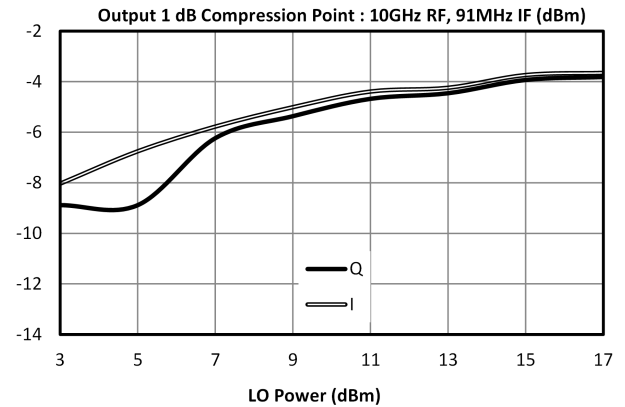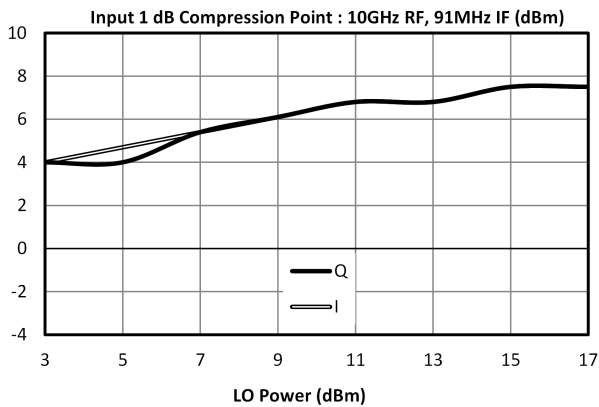



### Typical Performance Plots: LO Harmonic Isolation

LO Harmonic Isolation plots are taken with the following test conditions and based on the following fundamental input signal frequency plan:

| Parameter                            |   | Port | Start | Nominal | Stop   | Units |
|--------------------------------------|---|------|-------|---------|--------|-------|
| RF Input Frequency                   |   | 1    | 0     |         | 30     | GHz   |
| RF Input Power                       |   |      |       | -10     |        | dBm   |
| LO Input Frequency                   |   | 2    | 0.091 |         | 30.091 | GHz   |
| LO Input Power                       |   |      |       | +9      |        | dBm   |
| IF Output Frequency                  | Q | 3    |       | 91      |        | MHz   |
|                                      | I | 4    |       | 91      |        |       |
| T <sub>A</sub> , Ambient Temperature |   |      |       | +25     |        | °C    |
| Z <sub>0</sub> , System Impedance    |   |      |       | 50      |        | Ω     |

## MMIQ-0626LCH-2

### Low LO Drive Passive GaAs MMIC IQ Mixer

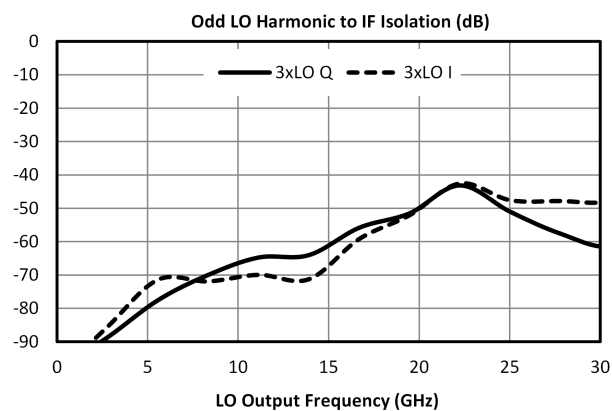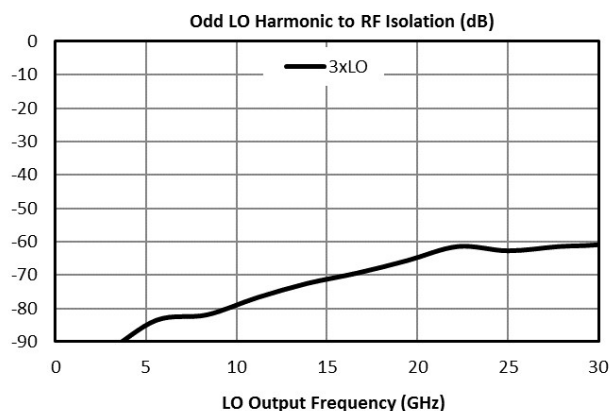



### Typical Performance Plots: Band Shifter

Band Shifter performance plots are taken with the following test conditions and frequency plan:

| Parameter                            | Port | Start  | Nominal  | Stop  | Units |
|--------------------------------------|------|--------|----------|-------|-------|
| IF Input Frequency                   | 2    |        | See Plot |       | GHz   |
| IF Input Power                       | 2    |        | -10      |       | dBm   |
| LO Input Frequency <sup>9</sup>      | 3+4  | 0.7    |          | 15    | GHz   |
| LO Input Power                       | 3+4  |        | +9       |       | dBm   |
| RF Output Frequency                  | 1    | IF+0.7 |          | IF+15 | GHz   |
| T <sub>A</sub> , Ambient Temperature |      |        | +25      |       | °C    |
| Z <sub>0</sub> , System Impedance    |      |        | 50       |       | Ω     |

Band shifter utilizes the mixer in a unique configuration with a low frequency LO signal. Refer to the Application Information section for more details.

<sup>9</sup> Low frequency LO quadrature hybrid used to take data is the QH-0R714.

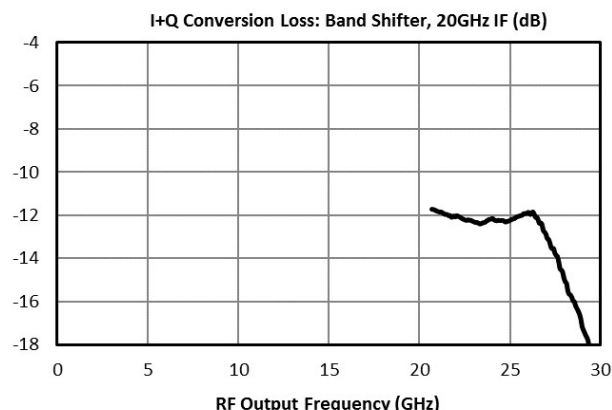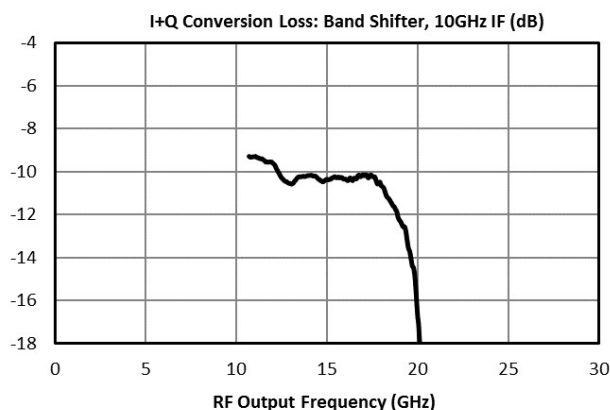



### Typical Performance Plots: Vector Modulator

Vector Modulator performance plots are taken with the following test conditions and frequency plan:

| Parameter                            |   | Port | Start | Nominal | Stop | Units |
|--------------------------------------|---|------|-------|---------|------|-------|
| Input Frequency                      |   | 2    | 0     |         | 30   | GHz   |
| Input Power                          |   |      |       | -10     |      | dBm   |
| I/Q Input Current                    | Q | 3    |       | +19     |      | mA    |
|                                      | I | 4    |       | +19     |      |       |
| Output Frequency                     |   | 1    | 0     |         | 30   | GHz   |
| T <sub>A</sub> , Ambient Temperature |   |      |       | +25     |      | °C    |
| Z <sub>0</sub> , System Impedance    |   |      |       | 50      |      | Ω     |



Nominal I/Q bias current given in the table to the right to tune a 10 GHz input signal's phase to 0°, 90°, 180°, or 270° at the port 1 RF output.

| Phase Shift (°) | I Port 4 Input Current (mA) | Q Port 3 Input Current (mA) |
|-----------------|-----------------------------|-----------------------------|
| 0               | +19                         | +19                         |
| 90              | -19                         | +3                          |
| 180             | -19                         | -19                         |
| 270             | +19                         | -3                          |

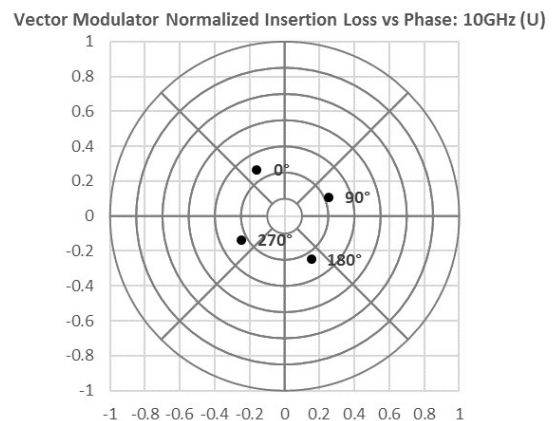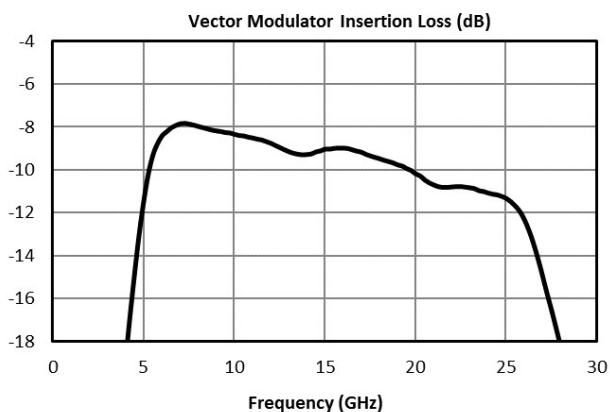

## MMIQ-0626LCH-2

Low LO Drive Passive GaAs MMIC IQ Mixer

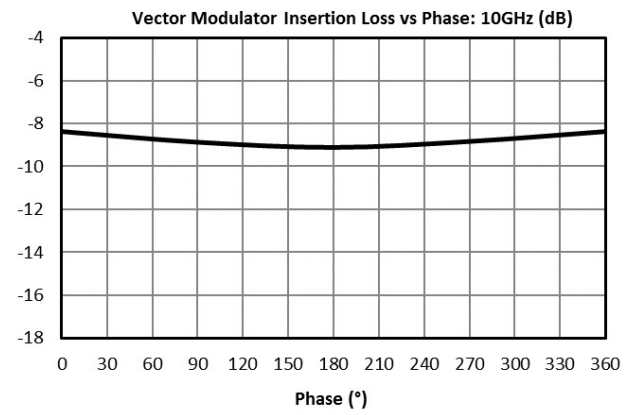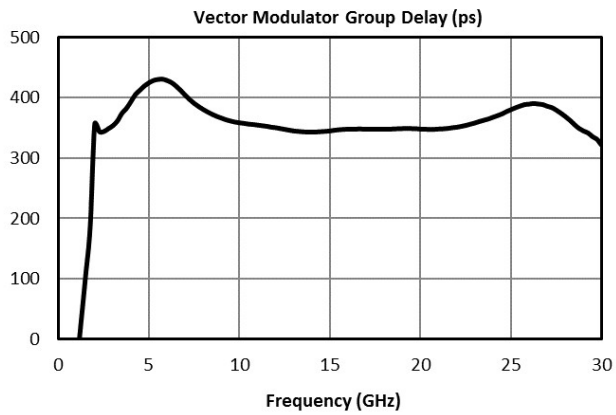




### Spur Table

#### Typical Spurious Performance: Down-Conversion


Typical spurious data is provided by selecting RF and LO frequencies ( $\pm m \cdot \text{LO} \pm n \cdot \text{RF}$ ) within the RF/LO bands, to create a spurious output within the IF band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by  $(n-1)$ , where “n” is the RF spur order. For example, the  $2\text{RF} \times 2\text{LO}$  spur is 64 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is  $(2-1) \times (-10 \text{ dB})$  lower, or 74 dBc. Data is shown for the frequency plan in Typical Performance.  $m\text{LO} \times 0\text{RF}$  plots can be found in Typical Performance Plots: LO Harmonic Isolation.  $0\text{LO} \times 1\text{RF}$  plot is identical to the plot of LO-RF isolation.

Typical Down-conversion spurious suppression (dBc): I Port (Q Port)

| -10 dBm RF Input | 0xLO    | 1xLO      | 2xLO    | 3xLO    | 4xLO    | 5xLO    |
|------------------|---------|-----------|---------|---------|---------|---------|
| 0xRF             | -       | 49 (50)   | 60 (60) | 57 (56) | 74 (75) | N/A     |
| 1xRF             | 21 (27) | Reference | 43 (33) | 45 (23) | 76 (72) | N/A     |
| 2xRF             | 52 (56) | 29 (33)   | 64 (67) | 43 (41) | 73 (75) | 65 (62) |
| 3xRF             | 57 (74) | 45 (47)   | 60 (64) | 59 (63) | 74 (76) | 54 (55) |
| 4xRF             | 51 (75) | 53 (62)   | 52 (58) | 65 (72) | 76 (78) | 74 (78) |
| 5xRF             | N/A     | N/A       | 78 (79) | 79 (79) | 70 (76) | 77 (79) |

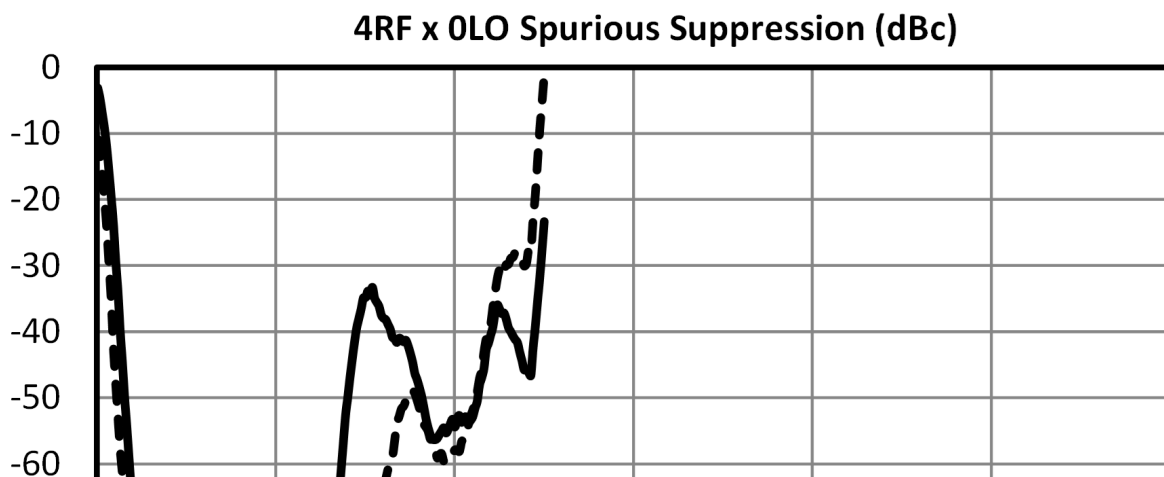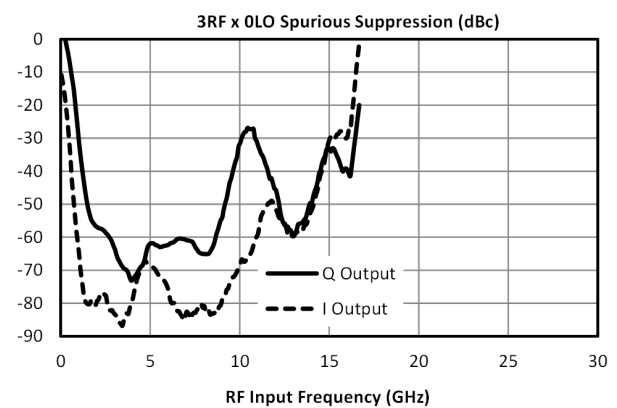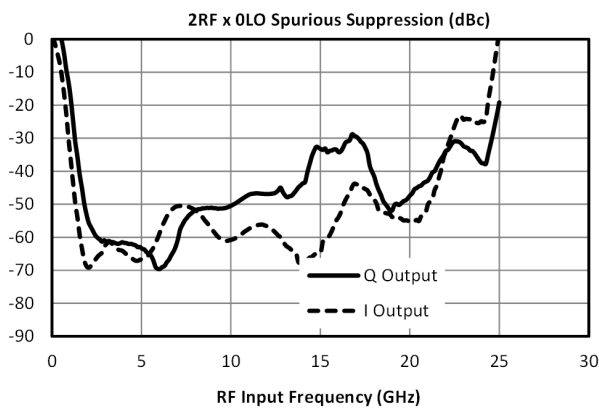

## Application Circuit

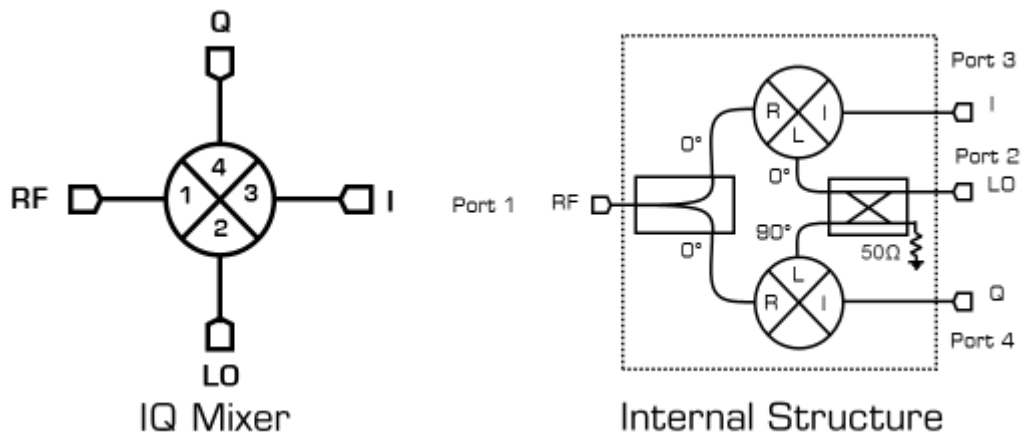

## Application Circuit Description

### Detailed Description

MMIQ-0626 belongs to Marki Microwave's MMIQ family of mixers. The MMIQ product line consists of passive GaAs MMIC mixers designed and fabricated with GaAs Schottky diodes. MMIQ mixers offer excellent amplitude and phase balance from the due to its on-chip LO quadrature hybrid. Up to 40dB of image rejection (i.e., single sideband suppression) can be obtained by using the MMIQ-0626 as an image rejection or single sideband mixer. The MMIQ-0626H is the sister mixer of the MMIQ-0626L. The MMIQ-0626H requires a higher LO drive to operate the mixer. In exchange, the MMIQ-0626H displays higher linearity (i.e., higher IIP3, P1dB, Spurious Suppression) than the MMIQ-0626L. Marki H and L diodes correspond to different diode forward turn on voltages.


Support for the X, Ku, and K bands are offered by the ultra-broadband performance of the mixer's RF and LO ports (ports 1 and 2). Direct baseband to K band frequency conversions are available by using this mixer as an up-converter. Traditional use of this mixer to do image reject or single sideband mixing is available with an external IF quadrature hybrid. The MMIQ-0626 is also suitable for use as a Vector Modulator through DC bias of the I and Q ports (ports 3 and 4).

Port 1, the RF port, and port 2, the LO port, supports a 6-26GHz signal. Ports 3 and 4, the I and Q ports, support a DC-6GHz signal. A signal may be input into any port of the mixer which supports that signal's frequency. This is the basis of using the mixer as a band shifter.

For a given LO power within the recommended operating range, the RF (in the case of a down conversion) or IF (in the case of an up conversion) input power should be below the input 1dB compression point to avoid signal distortion. The input 1dB compression point will vary across the mixer's operating bandwidth and with LO input power. Careful characterization is required for optimal performance for each application. There is no minimum small signal input power required for operation. Excessive RF/IF input power increases non-desired spurious output power and degrades the fundamental conversion loss. Excessive LO input power can also cause this effect. The table below describes how to use an IQ mixer and quad hybrid to select a single sideband.

| Up Conversion   |            |                   |
|-----------------|------------|-------------------|
| Hybrid Port     | Mixer Port | Sideband Selected |
| 0               | I          | Lower Sideband    |
| 90              | Q          |                   |
| 90              | I          | Upper Sideband    |
| 0               | Q          |                   |
| Down Conversion |            |                   |
| Hybrid Port     | Mixer Port | Sideband Selected |
| 0               | I          | Upper Sideband    |
| 90              | Q          |                   |
| 90              | I          | Lower Sideband    |
| 0               | Q          |                   |

## Down-Converter

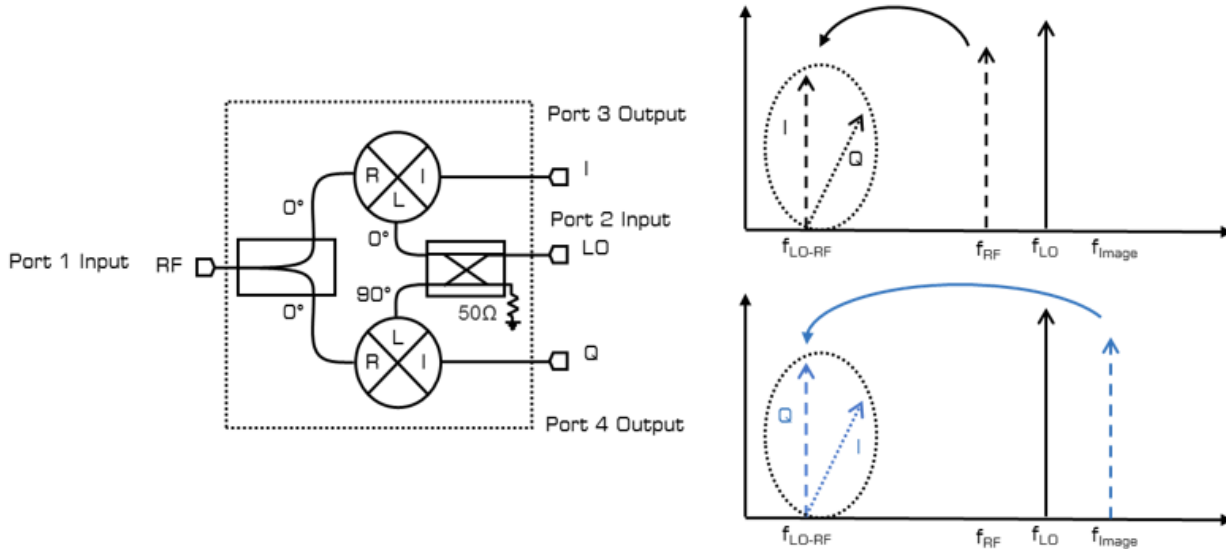


A down converter is a mixer application which takes a high frequency small signal RF input, and a high frequency large signal LO input and mixes the signals together to produce a low frequency IF output. The fundamental  $1RF \times 1LO$  outputs present at the IF port are the  $f_{LO-RF}$  and  $f_{LO+RF}$  tones. The desired output in a down conversion is typically the  $f_{LO-RF}$  term. An image frequency at  $f_{Image} = f_{2LO-RF}$  will also down convert to the  $f_{LO-RF}$  frequency. The above illustration shows the relative location of the image frequency for a highside LO, or the frequency plan for which  $f_{LO} > f_{RF}$ .

To use the IQ mixer as a down converter, input a high frequency small signal RF input into port 1, a high frequency large signal LO input into port 2, and pull the low frequency IF output from ports 3 and 4. Ports 3 and 4 will output the IF signals I and Q. I and Q IF outputs will be at the same frequency but 90° out of phase (i.e., I and Q are in quadrature). If only a single IF output is desired, terminate either the I or Q ports with a wideband 50Ω load.

This is the input scheme was used to take I/Q down-conversion data found in the Typical Performance Plots section.

## Image Reject Down-Converter


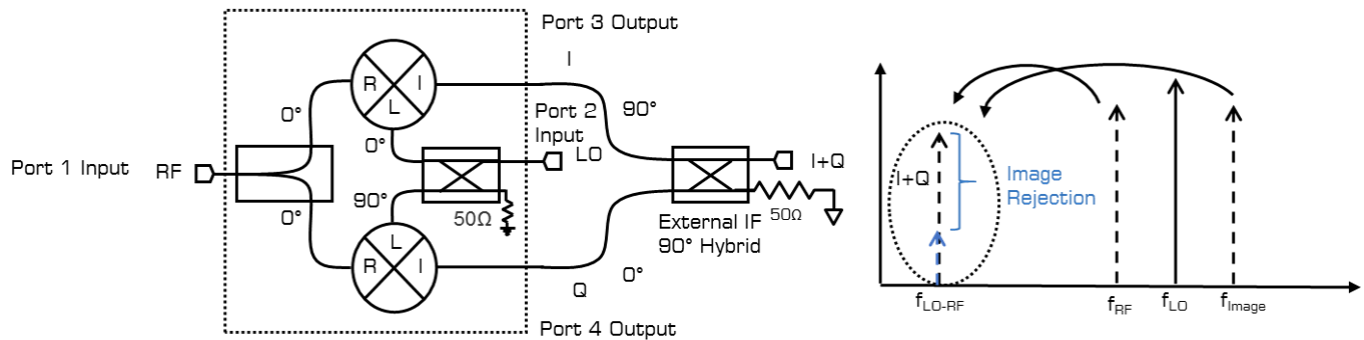


An image reject mixer is a mixer which rejects the down converted image frequency from the IF output. Image reject mixers are constructed using an external quadrature hybrid attached to the I and Q (i.e., IF) output ports. Using the external IF quadrature hybrid, one can select the whether the upper sideband or lower sideband signal is suppressed with respect to the LO signal.

To use the IQ mixer as an image reject mixer, input the high frequency small signal RF into port 1 and a high frequency large signal LO input into port 2. Take the combined I+Q down converted signal through the IF quadrature hybrid. Select the upper sideband (i.e., suppress the lower sideband) by connecting the I port to the 0° port of the IF quadrature hybrid and attach the Q port to the 90° port of the IF quadrature hybrid. Select the lower sideband (i.e., suppress the upper sideband) by attaching the I port to the 90° port of the IF quadrature hybrid and attach the Q port to the 0° port of the IF quadrature hybrid.

This is the input scheme was used to take image rejection down-conversion data found in the Typical Performance Plots section.

## Up-Converter

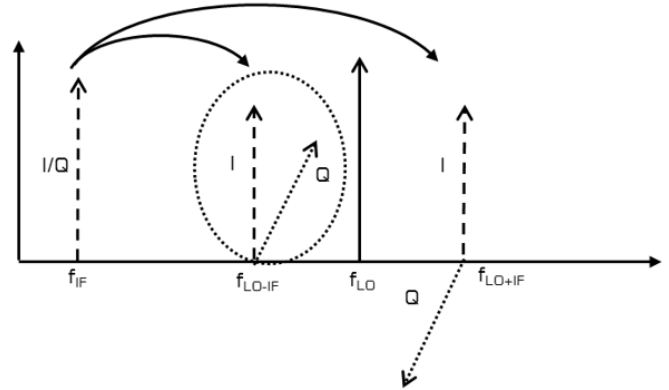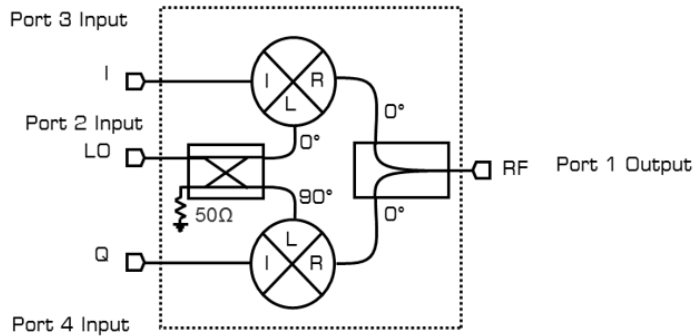


An up converter is a mixer application which takes a low frequency small signal IF input, and a high frequency large signal LO input and mixes the signal together to produce a high frequency RF output. The fundamental  $1\text{IF} \times 1\text{LO}$  outputs present at the RF port are the  $f_{\text{LO-IF}}$  and  $f_{\text{LO+IF}}$  tones. An up conversion can select either the  $f_{\text{LO-IF}}$  or the  $f_{\text{LO+IF}}$  tones. The above illustration shows both up converted sidebands with either an I or Q port input signal.

To use the IQ mixer as an up converter, input a low frequency small signal IF input into port 3 or 4, a high frequency large signal LO input into port 2, and pull the high frequency RF output from port 1. Input into the Q port will result in a up converted signal that is  $90^\circ$  out of phase with the up converted I port input signal. If only a single IF input is desired, terminate either the I or Q ports with a wideband  $50\Omega$  load.

This is the input scheme used to take I/Q up-conversion data found in Typical Performance.

## Single Sideband Up-Converter

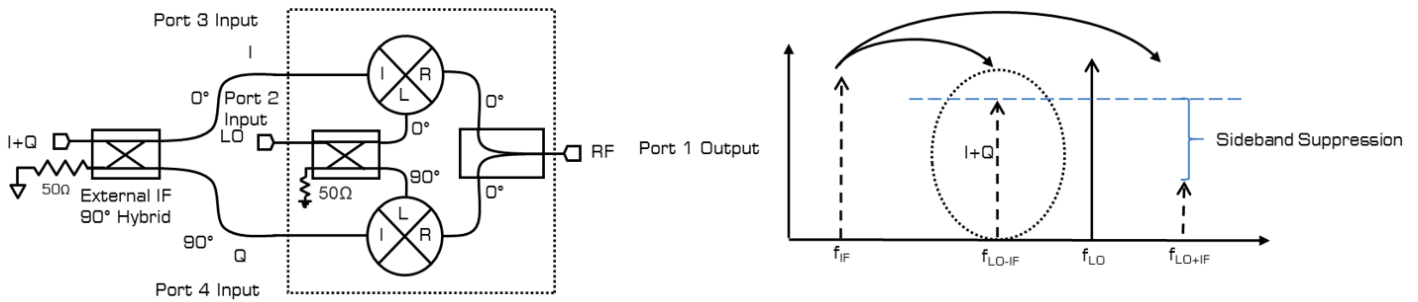


A single sideband mixer is a mixer which suppresses the up converted image frequency from the RF output. Single sideband mixers are constructed using an external quadrature hybrid attached to the I and Q (i.e., IF) input ports. Using an external IF quadrature hybrid, one can select whether the upper sideband of the lower sideband signal is suppressed with respect to the LO signal.

To use the IQ mixer as a single sideband mixer, input the low frequency small signal I+Q IF signal into the IF quadrature hybrid. The IF quadrature hybrid is attached to the I and Q ports of the IQ mixer. Input the high frequency large signal LO input into port 2 and take the up converted high frequency RF signal from port 1. Select the upper sideband (i.e., suppress the lower sideband) by attaching the I port to the 90° port of the IF quadrature hybrid and attach the Q port to the 0° port of the IF quadrature hybrid. Select the lower sideband (i.e., suppress the upper sideband) by attaching the I port to the 0° port of the IF quadrature hybrid and attach the Q port to the 90° port of the IF quadrature hybrid.

This is the input scheme used to take single sideband up-conversion data found in Typical Performance.

## Band Shifter

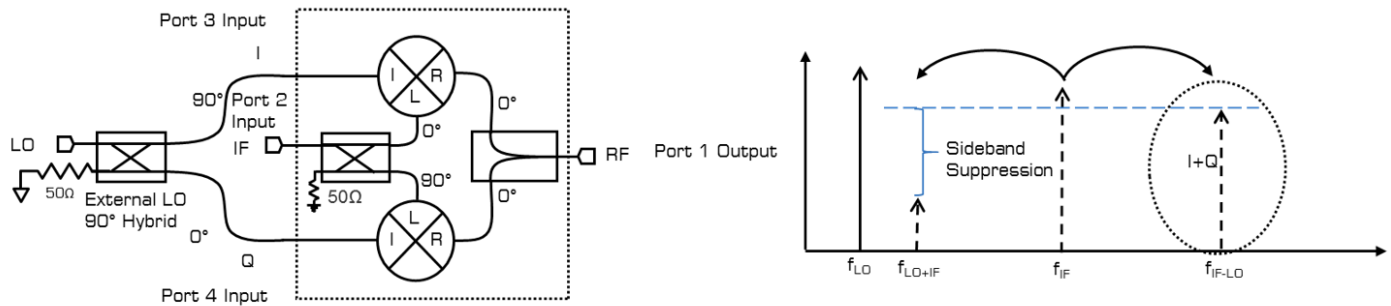

A band shifter is an unusual application for a mixer. Band shifters take an IF signal and shift it to a different band, generally to either avoid interference or for rebroadcast at a different frequency. For cases in which the desired band shift cannot be employed by using a standard up or down conversion scheme, an exotic input scheme is required.

A passive diode mixer is reciprocal on all ports. Port 1, the RF port, supports a 6-26GHz signal. Port 2, the LO port, supports a 6-26GHz signal. Ports 3 and 4, the IF ports, support a DC-6GHz signal. 2 signals input into any combination of the 3 ports, RF, LO, or IF, will result in an output signal at the 3<sup>rd</sup> port. In addition, an output signal will be present at both input ports. By using the IF port, as a large signal input port, low frequency LO applications can be supported.

The diagram above shows an IQ mixer being used as a band shifter. Using an IQ mixer as a band shifter allows for sideband suppression. This is identical to using the IQ mixer as a single sideband up converter. However, the large signal input port is now 3+4 versus port 2. Selection of the output tone is done through the orientation of the LO quadrature hybrid.


To use the mixer as a single sideband band shifter, input a low frequency large signal LO into the external LO quadrature hybrid. Input the high frequency small signal IF signal into port 2 and take the high frequency RF output from port 1. Select the upper sideband (i.e., suppress the lower sideband) by attaching the I port to the 90° port of the IF quadrature hybrid and attach the Q port to the 0° port of the LO quadrature hybrid. Select the lower sideband (i.e., suppress the upper sideband) by attaching the I port to the 0° port of the LO quadrature hybrid and attach the Q port to the 90° port of the LO quadrature hybrid.

This is the input scheme used to take band shifter data found in the Typical Performance Plots: Band Shifter section.

Using this input scheme requires careful accounting of which input signal is injecting which port. Injecting a signal into any port which does not support the correct band will lead to a degraded or no output response. Abide by the maximum DC current input into the I and Q ports of the mixer or otherwise irreversible damage to the mixer will occur.

The limiting factor in use of the mixer as an image reject band shifter is in the bandwidth of the external LO quadrature hybrid and bandwidth of the I and Q ports.

## Vector Modulator

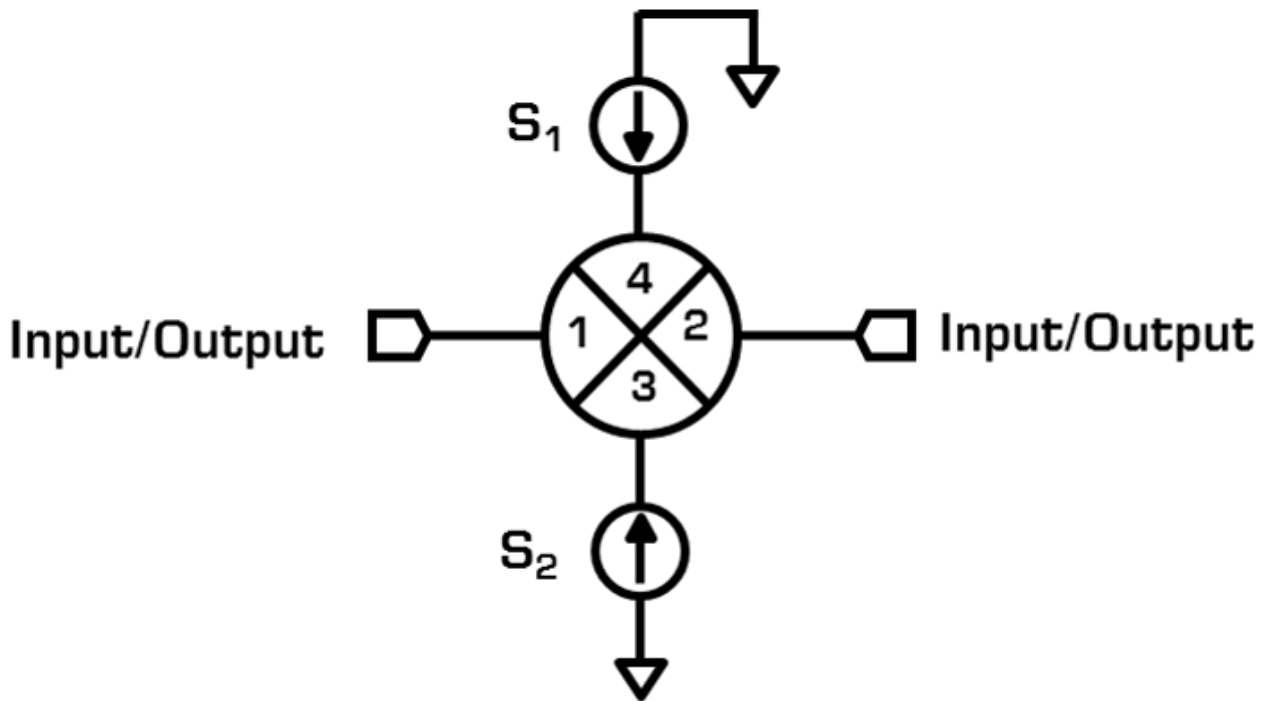

A vector modulator is a device that can modulate an input signal's amplitude and phase. Similar to using a double balanced mixer as a phase modulator or phase shifter, an IQ mixer can be used as a vector modulator. An IQ mixer can be used as a vector modulator by inputting DC current into both the I and Q ports.

Injecting DC current into both the I and Q ports forward biases both mixer cores and causes them to be shorted. This connects the RF and LO baluns allowing the input signal to pass from balun to balun without a frequency conversion. Modulating the DC current into either or both I and Q mixers causes both the phase and amplitude to modulate based on the polarity of the input current and the magnitude of the input current. Modulating only the I or Q mixers causes the device to behave as a biphase modulator (i.e., the device can only swing the phase from  $+90^\circ$  to  $-90^\circ$ ).

To use the IQ mixer as a vector modulator, supply a DC current sufficient to turn on the mixer through both the I and Q ports. An example bias condition is given in Typical Performance Plots: Vector Modulator for the MMIQ-0626L with the phase set to  $0^\circ$ ,  $90^\circ$ ,  $180^\circ$ , and  $270^\circ$  for a 10GHz input. Current limiting the DC source to the maximum DC current value found in Absolute Maximum Ratings is recommended to prevent irreversible damage to the vector modulator. The typical DC current required to turn on the vector modulator is  $<30\text{mA}$ .

This is the measurement scheme used to take vector modulator data found in the Typical Performance Plots: Vector Modulator section.

It is recommended to sequence the vector modulator by slowly increasing the DC bias until the vector modulator is operating at the user desired condition.

Near the band edges of the vector modulator, more current than is typical for mid-band operation may be necessary to achieve the same amplitude and phase shift. This is due to the on chip LO quadrature hybrid operating near its band edge.

## Die Mounting Recommendations

### Mounting and Bonding Recommendations

Marki MMICs should be attached directly to a ground plane with conductive epoxy. The ground plane electrical impedance should be as low as practically possible. This will prevent resonances and permit the best possible electrical performance. Datasheet performance is only guaranteed in an environment with a low electrical impedance ground.

#### Mounting

To epoxy the chip, apply a minimum amount of conductive epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip. Cure epoxy according to manufacturer instructions.

#### Wire Bonding

Ball or wedge bond with 0.025 mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 °C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible <0.31 mm (12 mils).

#### Circuit Considerations

50  $\Omega$  transmission lines should be used for all high frequency connections in and out of the chip. Wirebonds should be kept as short as possible, with multiple wirebonds recommended for higher frequency connections to reduce parasitic inductance. In circumstances where the chip more than .001" thinner than the substrate, a heat spreading spacer tab is optional to further reduce bondwire length and parasitic inductance.

## Handling Precautions

#### General Handling

Chips should be handled with care using tweezers or a vacuum collet. Users should take precautions to protect chips from direct human contact that can deposit contaminants, like perspiration and skin oils on any of the chip's surfaces.

#### Static Sensitivity

GaAs MMIC devices are sensitive to ESD and should be handled, assembled, tested, and transported only in static protected environments.


#### Cleaning and Storage

Do not attempt to clean the chip with a liquid cleaning system or expose the bare chips to liquid. Once the ESD sensitive bags the chips are stored in are opened, chips should be stored in a dry nitrogen atmosphere.

## MMIQ-0626LCH-2


Low LO Drive Passive GaAs MMIC IQ Mixer

### Bonding Diagram

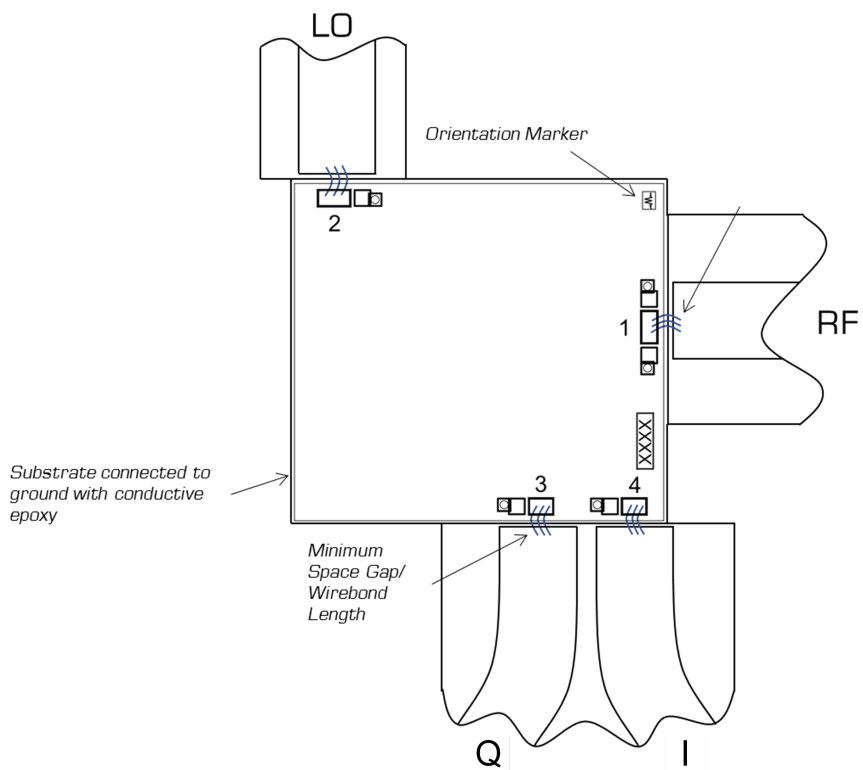

## Mechanical Data

## Outline Drawing

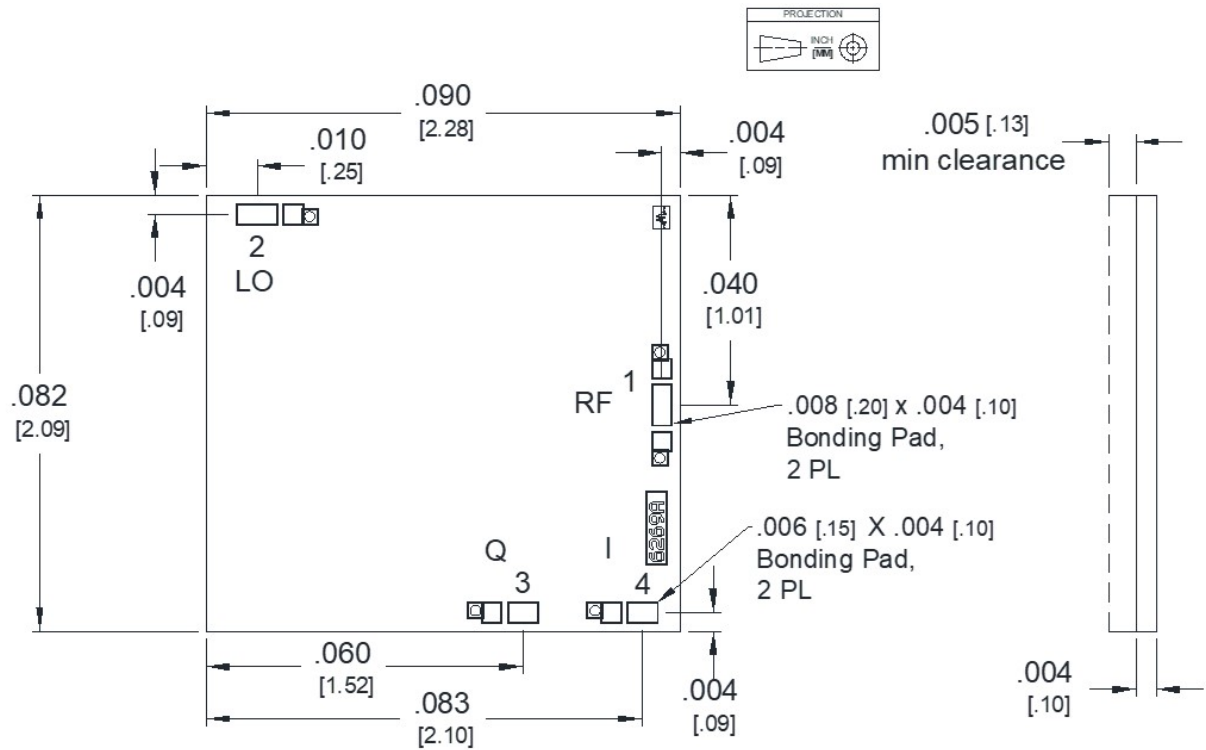

1. CH Substrate material is 0.004 in thick GaAs.
2. I/O trace finish is 4.2 microns Au. Ground plane finish is 5 microns Au.
3. XXXX denotes circuit number.

**DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2017 - 2019, 2022, Marki Microwave, Inc