


SSB-0618MXW-2

Single-Sideband Double-Balanced 6 - 18 GHz Mixers

DEVICE OVERVIEW

General Description

The SSB-0618 is a single sideband mixer that will perform a single sided upconversion. In a single sided upconversion, one of the two upconverted sidebands is suppressed by the mixer out of the RF port. SSB mixers have generally been replaced by MMIQ mixers with superior performance, repeatability, and availability. SSB series mixers are still used in legacy systems and are suitable for laboratory use.




Features

- LO/RF 6.0 to 18.0 GHz
- IF (input) 4 to 210 MHz
- 7.5 dB Typical Conversion Loss
- 35 dB Typical LO to RF Isolation
- 23 dB Typical Sideband Suppression
- Connectorized
- Ultra-Broadband IF

Applications

N/A

Functional Block Diagram

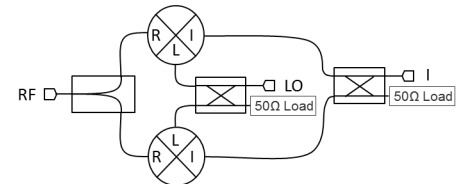

Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
<u>SSB-0618LXW-2</u>	Single-Sideband Double-Balanced Mixers	XW	<u>Standard</u>	Non-RoHS	End of Life	EAR99
<u>SSB-0618MXW-1</u>	Single-Sideband Double-Balanced Mixers	XW	<u>Standard</u>	Non-RoHS	Not Recommended for New Design	EAR99
SSB-0618MXW-2	Single-Sideband Double-Balanced 6 - 18 GHz Mixers	XW	<u>Standard</u>	Non-RoHS	Not Recommended for New Design	EAR99
<u>SSB-0618LXW-1</u>	Single-Sideband Double-Balanced Mixers	XW	<u>Standard</u>	Non-RoHS	End of Life	EAR99

Table Of Contents

■ Device Overview

- General Description
- Features
- Applications
- Functional Block Diagram

■ Port Configuration and Functions

- Port Diagram
- Port Functions

■ Specifications

- Package Information
- Recommended Operating Conditions
- Electrical Specifications
- Typical Performance Plots

■ Mechanical Data

- Outline Drawing

■ Notes

SSB-0618MXW-2

**Single-Sideband Double-Balanced 6 - 18
GHz Mixers**

Specifications

Package Information

Parameter	Details	Rating
Weight	Package name: XW	40g
Dimensions	-	20.32 x 20.32 mm

Recommended Operating Conditions

Parameter	Min	Nominal	Max	Unit
LO Input Power	10	-	13	dBm

NOT RECOMMENDED FOR NEW DESIGN

SSB-0618MXW-2

Single-Sideband Double-Balanced 6 - 18 GHz Mixers

Electrical Specifications


Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
RF Frequency Range	-	-	-	6	-	18	GHz
Conversion Loss	LO/RF=6-18 GHz IF=0.004-0.21 GHz	6	18	-	7.5	9	dB
Input IP3	LO/RF=6-18 GHz M Diode drive level=13-16 dBm	6	18	-	16	-	dBm
IF Frequency Range	-	-	-	0.004	-	0.21	GHz
Input 1 dB Compression	LO/RF=6-18 GHz M Diode drive level=13-16 dBm	6	18	-	6	-	dBm
Sideband Suppression	LO/RF=6-18 GHz IF=0.004-0.21 GHz	6	18	14	23	-	dB
Isolation, LO to IF	LO/RF=8-18 GHz	8	18	-	25	-	dB
Isolation, LO to RF	LO/RF=8-18 GHz	8	18	25	35	-	dB
Isolation, RF to IF	LO/RF=8-18 GHz	8	15	-	25	-	dB
Sideband Suppression	LO/RF=8-18 GHz IF=0.004-0.21 GHz	8	18	16	23	-	dB

SSB-0618MXW-2

Single-Sideband Double-Balanced 6 - 18 GHz Mixers

Typical Performance Plots

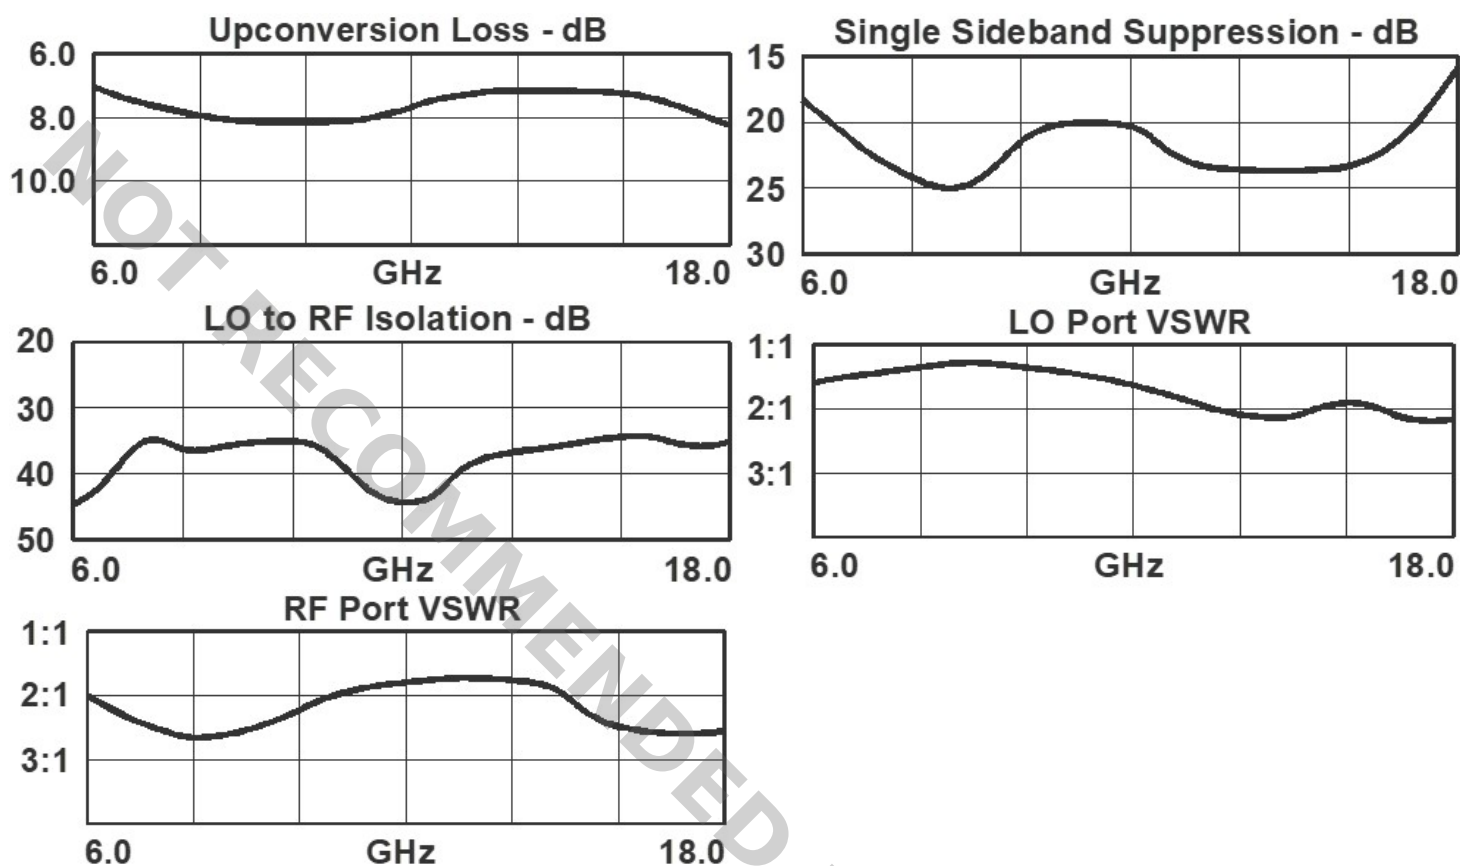


SSB-0618MXW-2

Single-Sideband Double-Balanced 6 - 18 GHz Mixers

Mechanical Data

Outline Drawing

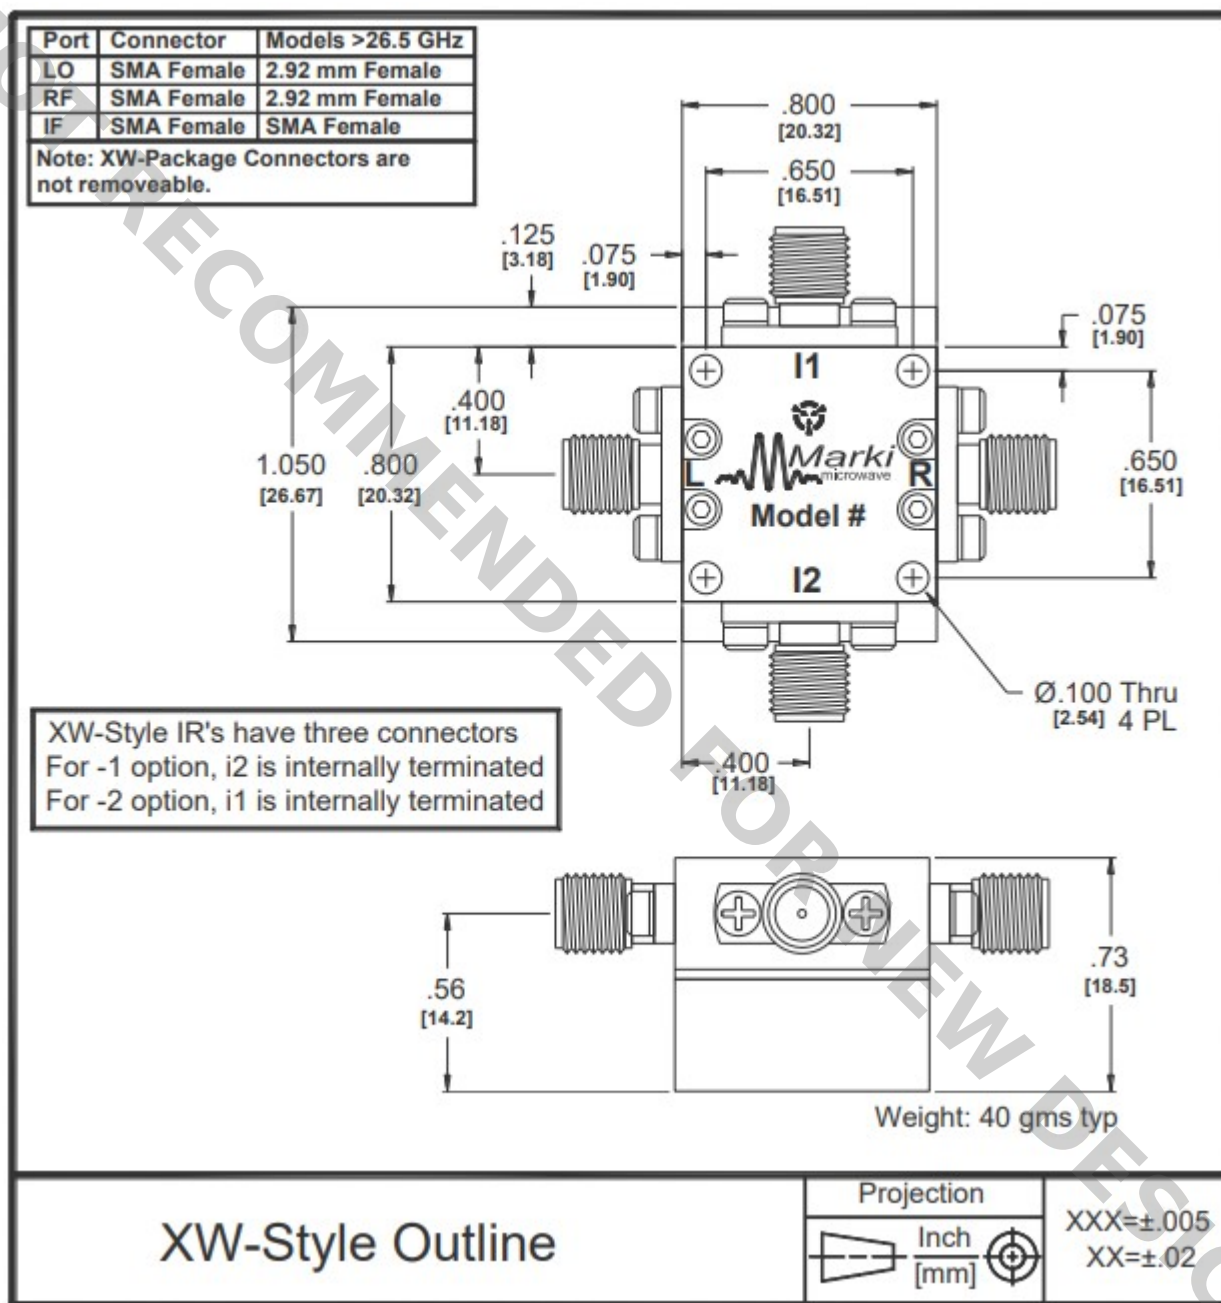

SSB-0618MXW-2**Single-Sideband Double-Balanced 6 - 18
GHz Mixers****Notes**

1. Mixer Conversion Loss Plot IF frequency is 70 MHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Maximum input power is +26 dBm at +25°C, derated linearly to +23 dBm at +100°C.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2022 - 2024, Marki Microwave, Inc