

Detectors

50 Years of
Excellence

.01-18 GHz

Miniature Flat, Zero-Biased
Schottky Detectors

- Broadband Coverage
- Flat Frequency Response
- High Sensitivity
- Field-Replaceable Diode
- Negative or Positive Output Available




Specifications

FREQUENCY RANGE GHz	MODEL	FLATNESS dB (GHz)	SENSITIVITY mV/ μ W	VSWR (max)	INPUT POWER mW (max)	POLARITY	CONNECTORS	
							INPUT	OUTPUT
0.01 - 18	503A	± 0.6	0.5	< 1.6	100	Neg.	Type N-M	BNC-F
0.01 - 18	503A-03	± 0.6	0.5	< 1.6	100	Pos.	Type N-M	BNC-F
0.01 - 18	4503A	± 0.6	0.5	< 1.6	100	Neg.	SMA-M	BNC-F
0.01 - 18	4303A-03	± 0.6	0.5	< 1.6	100	Pos.	SMA-M	BNC-F

Replacement Diodes

Detector	Replacement Diode
503A, 4503A	4829
503A-03, 4503A-03	4829-03





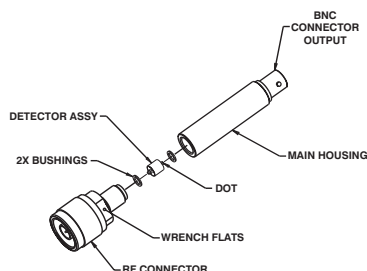


Field Diode Replacement Procedure

Using approved ESD guidelines:

1. Hold Detector by main housing (side with BNC connector). Unscrew RF Input connector by applying a wrench to flats provided.
2. Remove detector assembly.
3. Insert bushings into each assembly.
4. Insert replacement diode into RF connector side – dot should be facing out.
5. Reassemble the connector and hand tighten.

Outline Drawings

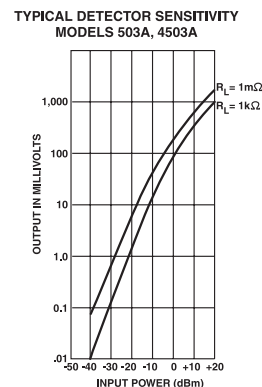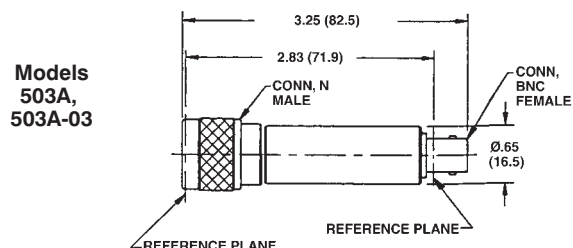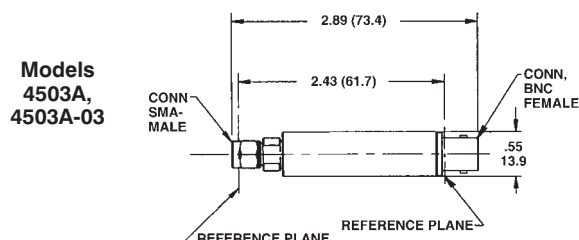

All dimensions are max. unless otherwise specified.



narda

an RF communications company

435 MORELAND ROAD • HAUPPAUGE, NY 11788
 USA TEL: (1) 631 231-1700 • INT'L TEL: (1) 631 231-1390 • FAX (1) 631 231-1711
 E-MAIL: nardaeast@L-3COM.com • www.nardamicrowave.com