


Agilent Fiber Optic and IC Solutions for Networking and Storage



Semiconductor Solutions for the Connected World



Agilent Technologies offers a broad range of semiconductor products for your specific Networking and Storage application.

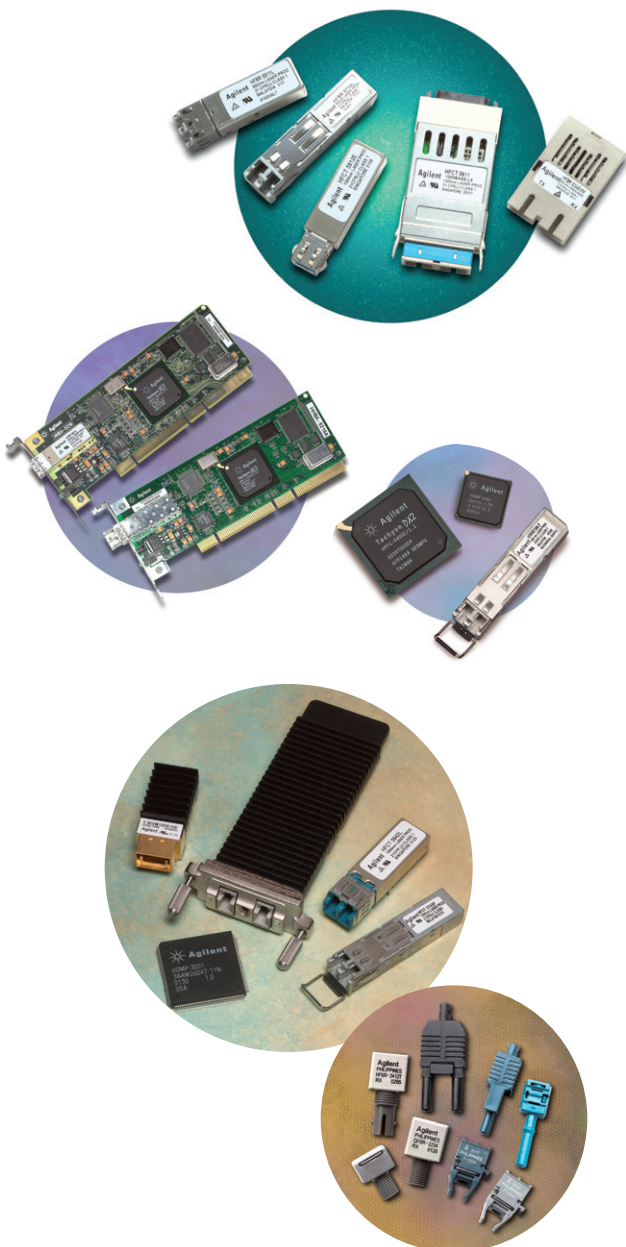

Ethernet Solutions

- SerDes ICs
- Port Bypass/Repeater ICs
- Fiber Optic Transmitters
- Fiber Optic Receivers
- 100 Mb/s, 1 Gb/s and 10 Gb/s Fiber Optic Transceivers

Storage Solutions

- Industry leading Tachyon Fibre Channel Controller ICs
- 1 and 2 Gb/s Fiber Optic Transceivers
- SerDes
- Port Bypass ICs
- InfiniBand Switch ICs
- Fibre Channel Adapter Boards

METRAK Solutions for Metro Networks

- Multi-protocol IC (MPIC) for Ethernet-Over-SONET
- G-Link
- High-Bandwidth Parallel Optics Modules
- DWDM Transceivers
- SONET SDH Fiber Optic Transceivers

Industrial Networking Solutions

- 650 nm Discrete Optical Components
- 820 nm Discrete Optical Components
- Plastic Optical Fiber Connectors
- Plastic Optical Fiber Accessories

Ethernet Solutions

LAN Products Selection Guide

Applications: Backbone Switches (L2/L3, ATM), Backbone Routers (IP, IP/ATM), Workgroup Hubs/Switches, NICs, Media Converters

SerDes ICs

	Description	Package Type	Pin-Out	Part Number
1.25 GBd GbE SerDes IC	w/Dual Serial I/O & Differ. PECL Clock Inputs	10 mm PQFP	64-pin	HDMP-1638
	with Differential PECL Clock Inputs	10 mm PQFP	64-pin	HDMP-1637A
		10mm PQFP	64-pin	HDMP-1636A
		10mm TQFP	64-pin	HDMP-T1636A
		14mm PQFP	64-pin	HDMP-1646A
1.25 GBd Quad GbE SerDes IC	w/5-pins/Channel Parallel Interface	23 mm TBGA	208-Ball	HDMP-1685A
	w/REFCLK as TX Clock	23 mm TBGA	208-Ball	HDMP-1687

Port Bypass/Repeater ICs

1.06-1.25 GBd Single PBC/Repeater	w/CDR	SSOP	24-pin	HDMP-0421
	w/CDR/VDD	SSOP	24-pin	HDMP-0422
1.06-1.25 GBd Quad PBC/Repeater	w/o CDR	PQFP	44-pin	HDMP-0440
	w/o CDR (5 muxes)	PQFP	44-pin	HDMP-0450
	w/CDR	PQFP	44-pin	HDMP-0452
1.06-1.25 GBd Octal Cell PBC/Repeater	w/o CDR	PQFP	64-pin	HDMP-0480
	w/CDR/VDD	PQFP	64-pin	HDMP-0482

Fiber Optic Transmitters and Receivers

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
10 Mb/s 820 nm Ethernet (Multi-Mode)	-40 to +85°C	5 V	Duplex	ST	8 Pin	HFBR-14x4 Transmitters
				SMA	8 Pin	
				SC	8 Pin	
				FC	8 Pin	
				ST	8 Pin	HFBR-24xx Receivers
				SMA	8 Pin	
				SC	8 Pin	
				FC	8 Pin	
100 Mb/s Fast Ethernet/FDDI 1300 nm LED (Multi-Mode)	0 to +70°C	5 V	Duplex	ST	16 Pin	HFBR-1115T Transmitter
				ST	16 Pin	HFBR-2115T Receiver

Ethernet Solutions

Fiber Optic Transceivers

10/125/155 Mb/s Fast Ethernet/FDDI 1300 nm LED (Multi-Mode)	0 to +70°C	5 V	Duplex	SC	1x9	HFBR-5103 Standard Height
				ST	1x9	HFBR-5103T
				SC	1x9	HFBR-5103P Mezzanine Height
				SC	1x9	HFBR-5103PE Mezzanine Height w/Extended Shield
				MIC	2x11	HFBR-5111
				MIC	1x13	HFBR-5112
				MIC	1x13	HFBR-5113
				SC	1x9	HFBR-5803
				ST	1x9	HFBR-5803T
		3.3 V	Duplex	SC	1x9	HFBR-5803
				ST	1x9	HFBR-5803T
			SFF PTH	MTRJ	2x5	HFBR-5903
				MTRJ	2x5	HFBR-5903E w/Extended Shield
				LC	2x5	HFBR-5961L
				LC	2x5	HFBR-5963L SD=LV TTL
			SFP	LC	Pluggable	HFBR-5760L
	-40 to +85°C	5 V	Duplex	SC	1x9	HFBR-5103A
						HFBR-5803A
				ST	1x9	HFBR-5103AT
						HFBR-5803AT
		3.3 V	Duplex	SC	1x9	HFBR-5803A
				ST	1x9	HFBR-5803AT
			SFF PTH	MTRJ	2x5	HFBR-5903A
				LC	2x5	HFBR-5961AL
				LC	2x5	HFBR-5963AL SD=LV TTL
			SFP	LC	Pluggable	HFBR-5760AL
100/125 Mb/s Fast Ethernet/FDDI 1300 nm Laser (Single-Mode)	0 to +70°C	5 V	Duplex	SC	1x9	HFCT-5103B (Black case)
				SC	1x9	HFCT-5103D (Blue case)
		3.3 V	SFF PTH	MTRJ	2x5	HFCT-5903E
				LC	2x5	HFCT-5961xxx

Ethernet Solutions

Fiber Optic Transceivers

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
1000 Mb/s Gigabit Ethernet 850 nm VCSEL (Multi-Mode)	0 to +70°C	5 V	GBIC	SC	20 Pin	HFBR-5601
			Duplex	SC	1x9	HFBR-53D5
						HFBR-53D5EM (Extended Shield)
						HFBR-53D5FM (Flush Shield)
		3.3 V	Duplex	SC	1x9	HFBR-53A5VEM (Extended Shield)
						HFBR-53A5VFM (Flush Shield)
			SFP	LC	Pluggable	HFBR-5710L (Standard De-latch)
						HFBR-5710LP (Bail De-latch)
						HFBR-5701L (Standard De-latch)(Dual Spec GbE/FC)
						HFBR-5701LP (Bail De-latch)(Dual Spec GbE/FC)
	SFF	LC	2x5	HFBR-5911L		
		MTRJ	2x5	HFBR-5912E		
	-10 to +85°C	3.3 V	SFP	LC	Pluggable	HFBR-57L5AP w/DMI
						HFBR-57M5AP w/DMI (Tri-Rate 2.125 FC/1.06 FC/1.25 GbE)
			SFF PTH	LC	2x5	HFBR-59L1AL (Dual Spec GbE/FC)
						HFBR-59M1L (Tri-Rate 2.125 FC/1.06 FC/1.25 GbE)
1000 Mb/s Gigabit Ethernet 1300 nm FP Laser (Single-Mode)	0 to +70°C	5 V	GBIC	SC	20 Pin	HFCT-5611
			Duplex	SC	1x9	HFCT-53D5EM (Extended Shield)
		HFCT-53D5FM (Flush Shield)				
	3.3 V	SFF PTH	MTRJ	2x5	HFCT-5912E	
	-10 to +85°C	3.3 V	SFF PTH	LC	2x5	HFCT-5911ATL (1.25Gb/s)
					2x10	HFCT-5914ATL (1.25Gb/s)
					2x5	HFCT-59L1ATL (1.25 Gb/s and 1G FC)
			SFP	LC	Pluggable	HFCT-5710L (Standard De-latch)(Dual Spec GbE/FC)
						HFCT-5710LP (Bail De-latch)(Dual Spec GbE/FC)
						HFCT-5701L (Standard De-latch)(Dual Spec GbE/FC)
HFCT-5701LP (Bail De-latch)(Dual Spec GbE/FC)						
10 GbE XENPAK 1310 nm DFB Laser (Single-Mode)	0 to +70°C		XENPAK	SC	Pluggable	HFCT-701XB

Storage Solutions

Tachyon Protocol Controller Selection Guide

Model	FC Speed	Bus Info	Memory	FC Topology/ Service	Integration	Other Features
HPFC-5100	1.0625 GBd	• PCI 33 MHz, 32/64-bit	Local 32-bit synch. SRAM option	• Pt-pt, Arbitrated Loop, Fabric - Class 2 (ACK_0) & 3	External SerDes interface	• FCP sequence segmentation and reassembly • 1024-byte frame support • Loop map, bypass, broadcast and direct reset support
HPFC-5166	1.0625 GBd	• PCI 66 MHz, 32/64-bit	Local 32-bit synch. SRAM option	• Pt-pt, Arbitrated Loop, Fabric • Class 2 (ACK_0) & 3	External SerDes interface	• FCP sequence segmentation and reassembly • 1024-byte frame support • Loop map, bypass, broadcast and direct reset support
HPFC-5200	2.125 GBd	• PCI 66 MHz, 32/64-bit	No external SRAM required	• Pt-pt, Arbitrated Loop (FC_AL2), Fabric • Class 2 (ACK_0/1) & 3	1 / 2 Gb/s integrated transceiver and external SerDes interface	• 1-chip FC-to-PCI solution • Inbound frame buffers • 8-bit data parity protection • High-priority frames • Multiple in/outbound Sequence support
HPFC-5400	2.125 GBd, Dual Channel (FC, full rate)	• PCI-X 66/100/133 MHz, 32/64-bit • PCI 33/66 MHz, 32/64-bit • MSI and PCI/PCI-X hot plug compatible	No external SRAM required 4k on-chip boot RAM	• Fabric, Pt-pt, & Arbitrated Loop (FC_AL2), • Class 2 (ACK_0/1) & 3	1 / 2 Gb/s integrated transceiver and external SerDes interface	• 1-chip FC-to-PCI solution • Inbound frame buffers • 8GPIO Pins/ channel • High-priority frames • Multiple in/ outbound sequence support • 8-bit data parity protection

Storage Solutions

Fiber Optic Transceivers Selection Guide

Model	Speed	Compliance	Package Type	Performance	Other Features
HFBR-57M5AP	2 GBd FC 1 GBd FC 1 GbE	FC-P1 FC-PH-2 1000Base-SX	• SFP LC MM	• 0.5 to 300 m over 50/125 µm MMF at 2.125 Gbps • 0.5 to 500 m over 50/125 µm MMF at 1.06 Gbps • 0.2 to 550 m over 50/125 µm MMF at 1 GbE	• Diagnostic Monitoring Interface (DMI) • Programmable alarms and warnings • AEL laser class 1 eye safe operation • Single +3.3 V operation
HFBR-57L5AP	1 GBd FC 1 GbE	FC-P1 1000Base-SX	• SFP LC MM	• 0.5 to 300 m over 50/125 µm MMF at 2.125 Gbps • 0.5 to 500 m over 50/125 µm MMF at 1.06 Gbps	• Diagnostic Monitoring Interface (DMI) • Programmable alarms and warnings • Single +3.3 V operation • AEL laser class 1 eye safe operation
HFBR-5910E	1.0625 GBd	ANSI X3.297 FC-PH-2 r7.4 for 100-M5-SN-I and 100-M6-SN-I interfaces	• 2x5 SFF, MM • Internal MT-RJ connector	• 300 m over 62.5/125 µm MMF • 500 m over 50/125 µm MMF	• Single +3.3 V operation • TTL signal detect • Wave solder and aqueous wash capable
HFCT-5910E	1.0625 GBd	ANSI 100-SM-LC-L r2 to X3.297 FC-PH-2 r7.4	• 2x5 SFF MM • Internal MT-RJ connector	• 500 m over 50/125 µm MMF • 10 km over 9/125 µm SMF	• Single +3.3 V operation • TTL signal detect • Wave solder and aqueous wash capable
HFCT-5921TL	2.125/ 1.0625 GBd	FICON	2x5 SFF LC SM	• 2 m to 10 Km at 2.125 and 1.063 GBd for 9/125 µm SMF	• Single +3.3 V operation • Interoperable 1G and 2G links
HFBR-5701L	1.25/ 1.0625 GBd	802.3 GbE, FC-P1	SFP LC MM	• 550 m over 50/125 µm MMF • 275 m over 62.5/125 µm MMF	• Single +3.3 V operation • AEL laser class 1 eye safe
HFBR-5720L Note: Use HFBR-5720ALP for new designs	2.125/ 1.0625 GBd	• 2.125 GBd FC FC-PI standard • 1.0625 GBd VCSEL operation for both 50/125, 62.5/125 µm MMF	SFP LC MM	• 0.5 to 300 m over 50/125 µm MMF at 2.125 Gbps • 0.5 to 500 m over 50/125 µm MMF at 1.06 Gbps	• Single +3.3 V operation • AEL laser class 1 eye safe
HFBR-5730L	1.0625 GBd	FC-P1, FC-PH-2	SFP MM	• 500 m over 50/125 µm MMF • 300 m over 62.5/125 µm MMF	• Single +3.3 V • AEL laser class 1 eye safe operation
HFBR-5720AL/ALP	2.125/ 1.0625 GBd	• 2.125 GBd FC FC-PI standard • 1.0625 GBd VCSEL operation for both 50/125, 62.5/125 µm MMF	SFP LC MM	• 0.5 to 300 m over 50/125 µm MMF at 2.125 Gbps • 0.5 to 500 m over 50/125 µm MMF at 1.06 Gbps	• Extended operating voltage +3.3 V ±10% • Extended temperature range (-20°C to +85°C)
HFBR-5921L/AL Note: Use HFBR-5921AL for new designs	2.125/1.0 625 GBd	• 2.125 GBd FC FC-PI standard • 1.0625 GBd VCSEL operation for both 50/125, 62.5/125 µm MMF	2x5 SFF LC MM	• 0.5 to 300 m over 50/125 µm MMF at 2.125 Gbps • 0.5 to 500 m over 50/125 µm MMF at 1.06 Gbps	• Single +3.3 V operation • Wave solder and aqueous wash process compatible • HFBR-5921AL with Extended temperature range (-10°C to +85°C)

Storage Solutions

Fiber Optic Transceivers Selection Guide

Model	Speed	Compliance	Package Type	Performance	Other Features
HFCT-5701L/LP	1.25/ 1.0625 GBd	• 802.3 GbE • FC 100-M5-SN-I, 100-M6-SN-I	SFP SM	• 2 to 550 m over 50/125 μm MMF • 2 to 275 m over 62.5/125 μm MMF	• Single +3.3 V operation
HFBR-5320	200 MBd	• ESCON • SBCON	4x7 w/ duplex interface		• Wave solder and aqueous wash capable • Low radiated emissions • High immunity to cond. noise
HFBR-5930/5930E	200 MBd	• ESCON • SBCON	• 2x5 SFF, MM • Internal MT-RJ connector • E is extended shield		• Wave solder and aqueous wash capable • Low radiated emissions • High immunity to cond. noise
HFBR-5602	1.0625 GBd	GBIC, ANSI X3.297 FC-PH-2 r7.4	GBIC MM	• 300 m over 62.5/125 μm MMF • 500 m over 50/125 μm MMF	• Hot-pluggable • AEL laser class 1 eye safe
HFCT-5612	1.0625 GBd	GBIC, ANSI 100-SM-LC-L r2 to ANSI X3.297 FC-PH-2 r7.4	GBIC SM	• 500 m over 50/125 μm MMF • 500 m over 62.5/125 μm MMF • 10 km over 9/125 μm SMF	• Hot-pluggable • AEL laser class 1 eye safe
HFBR-53A3VEM/FM	1.0625 GBd	ANSI X3.297 FC-PH-2 r7.4 for 100-M5-SN-I and 100-M6-SN-I interfaces	• 1x9 SC Duplex MM • EM: Extended shield • FM: Flush shield	• 300 m over 62.5/ 125 μm MMF • 500 m over 50/125 μm MMF	• Single +3.3 V operation • TTL Signal Detect • Wave solder and aqueous wash capable
HFBR-53D3EM/FM	1.0625 GBd	ANSI X3.297 FC-PH-2 r7.4 for 100-M5-SN-I and 100-M6-SN-I interfaces	• 1x9 SC Duplex MM • EM: Extended shield • FM: Flush shield	• 300 m over 62.5/125 μm MMF • 500 m over 50/125 μm MMF	• Single +5 V operation • Wave solder and aqueous wash capable
HFCT-53D3EM/FM	1.0625 GBd	ANSI X3.297 FC-PH-2 r7.4 for 100-M5-SN-I and 100-M6-SN-I interfaces	• 1x9 SC Duplex SM • EM: Extended shield • FM: Flush shield	• 500 m over 50/125 μm MMF • 500 m over 62.5/125 μm MMF • 10 km over 9/125 μm SMF	• Single +5 V operation • Wave solder and aqueous wash capable

Storage Solutions

SerDes ICs Selection Guide

Model	Speed	Compliance	Package Type	Other Features
HDMP-1636A	1.0625-1.25 GBd	• FC (ANSI X3.230 FC-0) • X3T11 10-bit interface spec. • 802.3 GbE	10 mm QFP (10 mm TQFP=HDMP-T1636A)	• Single +3.3 V supply • Low power • Backplane serialization • Bus extender • 5 V I/O's
HDMP-T1636A	1.0625-1.25 GBd	• FC (ANSI X3.230 FC-0) • X3T11 10-bit interface spec. • 802.3 GbE	10 mm QFP (10 mm TQFP=HDMP-T1636A)	• Single +3.3 V supply • Low power • Backplane serialization • Bus extender • 5 V I/O's
HDMP-1646A	1.0625- 1.25 GBd	• FC (ANSI X3.230 FC-0) • X3T11 10-bit interface spec. • 802.3 GbE	14 mm PQFP	• Single +3.3 V supply • Low power • Backplane serialization • Bus extender • 5V I/O's
HDMP-2689	1.0625-2.125 GBd	SSTL_2	19 mm, PBGA package	• 4-ports in one package • +1.8V core power supply, 2.5 V power supply for SSTL_2 I/O • Independently selectable channel data rates • Source-centered double data rate clocking of receive parallel data for 1 and 2 Gbps serial rates. • MII management interface for chip control & status
HDMP-1687	1.0625 GBd	• FC (ANSI X3.230 FC-0) • X3T11 10-bit interface spec. • 802.3 GbE	23 mm, TBGA package	• Single +3.3 V supply • Ref clock (RFCT) for Tx Data Latching • 5V tolerant TTL I/O's

Storage Solutions

Port Bypass ICs Selection Guide

Model	Speed	Support	Package Type	Other Features
HDMP-0421	1.0625-1.25 GBd	• PBC, CDR, SD • FC-AL • 802.3z GbE	• 24 Pin SSOP (+3.3 V) • Single cell PBC	• Bi-directional, symmetric bypass capability • Envelope detect equalizers
HDMP-0422	1.0625-1.25 GBd	• PBC, CDR, SD • FC-AL • 802.3z GbE	• 24 Pin SSOP (+3.3 V) • Single cell PBC	• Valid amplitude detect • Equalizers • Buffered Line Logic (BLL) outputs
HDMP-0440	1.0625-1.25 GBd	• PBC, SD • FC-AL	• 44 Pin, 10 mm PQFP (+3.3 V) • Quad cell PBC	• Equalizers • Buffered line logic (BLL) outputs
HDMP-0450	1.0625-1.25 GBd	• PBC, SD • FC-AL	• 44 Pin, 10 mm PQFP (+3.3 V) • Quad cell PBC	• Equalizers • Buffered line logic (BLL) outputs • Cable input on any of five cells • Envelope detect on one cell
HDMP-0452	1.0625-1.25 GBd	• PBC, CDR, SD • FC-AL	• 44 Pin, 10 mm PQFP (+3.3 V) • Quad cell PBC	• Equalizers • Buffered line logic (BLL) outputs • Envelope detect on cable input for CDR at entry case
HDMP-0480	1.0625-1.25 GBd	• PBC, SD • FC-AL • 802.3z GbE	• 64 Pin, 10 mm MQFP (+3.3 V) • Octal cell PBC	• Amplitude detection • Equalizers • High speed LVPECL I/O • Buffered line logic (BLL) outputs
HDMP-0482	1.0625-1.25 GBd	• PBC, CDR, SD • FC-AL • 802.3z GbE	• 64 Pin, 14 mm MQFP (+3.3 V) • Octal cell PBC/CDR	• Amplitude and Data Valid detection • Equalizers • High speed LVPECL I/O • Buffered line logic (BLL) outputs
HDMP-0552	1.0625/2.125 GBd	• PBC, CDR, SD • FC-AL	• 64 Pin, 10 mm PQFP (+3.3 V) • Quad cell PBC/CDR	• Amplitude and data valid detection • High speed LVPECL I/O • Buffered line logic (BLL) outputs

Infiniband

Model	Speed	Support	Package Type	Other Features
HDMP-2840	10 Gbps/port	• Infiniband Compliant Switch IC	• 22 mm x 22 mm BGA	• 8 ports of 4x (10 Gbps) Infiniband switching • Aggregate switch bandwidth of 160 Gbps • Integrated SerDes for reduced systems cost and power consumption • Fully non-blocking switch architecture

Storage Solutions

Fibre Channel Adapters Selection Guide

Model	FC Speed	FC Transfer Rate	Card Type	FC Typology/ Service	Bus	Physical Interface	Other Features
HHBA-5101C	1 Gb/s	400 MB/s Full Duplex	Single port, Short PCI Card	FC_AL, Fabric (F and FL_Port Login) Class 3	33 MHz; 64-bit PCI	GBIC (optical or copper)	
HHBA-5121B	1 Gb/s	400 MB/s Full Duplex	Single port, Short PCI Card	FC_AL, Fabric (F and FL_Port Login) Class 3	66 MHz; 64-bit PCI	GBIC (optical or copper)	
HHBA-5218A	1 or 2 Gb/s, auto speed negotiation	400 MB/s Full Duplex	Single port, Short PCI Card	FC_AL, Fabric (F and FL_Port Login) Class 2 and 3	66 MHz; 64-bit PCI	Small form factor pluggable (SFP) for optical transceiver or copper connector	Loop and fabric boot BIOS
HHBA-5219A	1 or 2 Gb/s, auto speed negotiation	400 MB/s Full Duplex	Single port, Short PCI Card	FC_AL, Fabric (F and FL_Port Login) Class 2 and 3	66 MHz; 64-bit PCI	Small form factor (SFF) optical transceiver	Loop and fabric boot BIOS
HHBA-5220B	1 or 2 Gb/s, auto speed negotiation	400 MB/s Full Duplex	Single port, Short PCI Card	FC_AL, Fabric (F and FL_Port Login) Class 2 and 3	66 MHz; 64-bit PCI	Small form factor pluggable (SFP) for optical transceiver or copper connector	Loop and fabric boot BIOS
HHBA-5221B	1 or 2 Gb/s, auto speed negotiation	400 MB/s Full Duplex	Single port, Short PCI Card	FC_AL, Fabric (F and FL_Port Login) Class 2 and 3	66 MHz; 64-bit PCI	Small form factor (SFF) optical transceiver	Loop and fabric boot BIOS
HHBA-5418A	1 or 2 Gb/s, auto speed negotiation	Two independent 2 Gb/s ports for a combined bandwidth of 800 MB/s	Dual Port, Low Profile MD2	FC_AL, Fabric (F and FL_Port Login) Class 2 and 3	133 MHz; 64-bit PCI-X. Backward compatible w/ 33/66 MHz PCI	Small form factor pluggable (SFP) for optical transceiver or copper connector	Loop and fabric boot BIOS, EFI support
HHBA-5420A	1 or 2 Gb/s, auto speed negotiation	Two independent 2 Gb/s ports for a combined bandwidth of 800 MB/s	Dual Port	FC_AL, Fabric (F and FL_Port Login) Class 2 and 3	133 MHz; 64-bit PCI-X. Backward compatible w/ 33/66 MHz PCI	Small form factor pluggable (SFP) for optical transceiver or copper connector	Loop and fabric boot BIOS, EFI support

METRAK Solutions for Metro Network

Ethernet to SONET/SDH Framer/Mapper Selection Guide

Data Rate	SONET/SDH Data Rate	Ethernet Data	Protocol	Part Number
155 Mb/s	Line Side Parallel STS-3c/STM-1	Full Duplex Fast Ethernet	GFP, and LAPS	HDMP-3001

G-Link Selection Guide

Data Rates	Parallel Data Bits	Package Type	Parallel I/O	Tx/Rx	Part Number
260-1400 Mb/s	16,17	64 pin PQFP	LVTTTL	Tx	HDMP-1032A
				Rx	HDMP-1034A
150-1500 Mb/s	16,17,20,21	80 pin MQUAD	TTL	Tx	HDMP-1022
				Rx	HDMP-1024

Parallel Optics Transceivers Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
10 Gbps Short Reach 500 m 850 nm (Multi-Mode)	0 to 70°C	3.3 V	Pluggable	MTP™/MPO	10x10 MegArray	HFBR-7924 (4+4 x 2.7 Gbd, Pluggable MSA Compliant)

Parallel Optics Transmitters and Receivers Selection Guide

Proprietary System Interconnect (PSI) Short Reach 500 m 850 nm (Multi Mode)	0 to 70°C	3.3 V	Pluggable	MTP™/MPO	10x10 MegArray	HFBR-772B (Transmitter, 12 x 2.5-2.72 Gbd Pluggable MSA Compliant, 50/125 µm)
				MTP™/MPO	10x10 MegArray	HFBR-782B (Receiver, 12 x 2.5-2.72 Gbd Pluggable MSA Compliant, 50/125 µm)
				MTP™/MPO	10x10 MegArray	HFBR-7793 (Transmitter, 12 x 2.5-2.72 Gbd Pluggable MSA Compliant, 62.5/125 µm)
				MTP™/MPO	10x10 MegArray	HFBR-789B (Receiver, 12 x 2.5-2.72 Gbd Pluggable MSA Compliant, 62.5/125 µm)

DWDM Transceiver Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
OC-48 100 km reach DWDM (single mode)	-5 to 70°C	3.3 V	MSA (1)	LC	70 pin	AFKC-xxxxD (xxxx specifies wavelength - note 2 AFKC-1000D (unspecified wavelength)
OC-48 160 km reach DWDM (single mode)	-5 to 70°C	3.3 V	MSA (1)	LC	70 pin	AFKC-xxxxE (xxxx specifies wavelength - note 2 AFKC-1000E (unspecified wavelength)

Notes

1. MSA package can be found at www.hotplugdwdm.org/msa.htm
2. See page 11 of datasheet

Accessories

- AFKA-0001 Rail mechanism for AFKC series
AFKA-0002 EMI kennel for AFKC series

METRAK Solutions for Metro Network

OC-3/SONET/SDH SFF/SFP Fiber Optic Transceivers Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
OC-3 Short Reach <2 km 1300 nm (Multi-Mode)	0 to 70°C	5 V	Duplex	SC	1x9	HFBR-5204 (500 m)
				SC	1x9	HFBR-5204P (Mezzanine height)
				SC	1x9	HFBR-5205
				SC	1x9	HFBR-5205P (Mezzanine height)
				SC	1x9	HFBR-5205PE (Mezzanine height w/extended shield)
				ST	1x9	HFBR-5204T
				ST	1x9	HFBR-5205T
		3.3 V	Duplex	SC	1x9	HFBR-5805
				ST	1x9	HFBR-5805T
			SFF PTH	MTRJ	2x5	HFBR-5905A (No nose shield)
				LC	2x5	HFBR-5961L
				LC	2x5	HFBR-5963L SD=LV TTL
			SFP	LC	Pluggable	HFBR-5760L
	-40 to +85°C	5 V	Duplex	SC	1x9	HFBR-5205A
				ST	1x9	HFBR-5205AT
	-10 to +85°C	3.3 V	Duplex	SC	1x9	HFBR-5805A
				ST	1x9	HFBR-5805AT
	SFF PTH		MTRJ	2x5	HFBR-5905 (No nose shield)	
			LC	2x5	HFBR-5961AL	
			LC	2x5	HFBR-5963AL SD=LV TTL	
	-40 to +85°C		SFP	LC	Pluggable	HFBR-5760AL

METRAK Solutions for Metro Network

OC-3/SONET/SDH SFF/SFP Fiber Optic Transceivers Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
OC-3 Intermediate Reach 15 km 1300 nm (Single Mode)	0 to 70°C	5 V	Duplex	SC	1x9	HFCT-5205B (Black Case)
				SC	1x9	HFCT-5205D (Blue Case)
				SC	2x9	HFCT-5201B (Black Case)
				SC	2x9	HFCT-5201D (Blue Case)
		3.3 V	Duplex	SC	1x9	HFCT-5805B (Black Case)
				SC	1x9	HFCT-5805D (Blue Case)
				SC	2x9	HFCT-5801B (Black Case)
				SC	2x9	HFCT-5801D (Blue Case)
			SFF PTH	LC	2x10	HFCT-5962TG (No nose shield)
				LC	2x10	HFCT-5962TL
				LC	2x10	HFCT-5964TG (SD LV TTL, no nose shield)
				LC	2x10	HFCT-5964TL (Signal Detect LV TTL)
				LC	2x5	HFCT-5961TG (No nose shield)
				LC	2x5	HFCT-5961TL
				LC	2x5	HFCT-5963TG (SD LV TTL, no nose shield)
				LC	2x5	HFCT-5963TL (Signal Detect LV TTL)
				MTRJ	2x5	HFCT-5905E (With nose shield)
			SFP	LC	Pluggable	HFCT-5760TL (w/o diagnostic monitoring interface "DMI"), std de-latch
				LC	Pluggable	HFCT-5760TP (w/o diagnostic monitoring interface "DMI"), bail de-latch
	-40 to +85°C	5 V	Duplex	SC	1x9	HFCT-5205A (Black Case)
				SC	1x9	HFCT-5205C (Blue Case)
				SC	2x9	HFCT-5201A (Black Case)
				SC	2x9	HFCT-5201C (Blue Case)
		3.3 V	Duplex	SC	1x9	HFCT-5805A (Black Case)
				SC	1x9	HFCT-5805C (Blue Case)
				SC	2x9	HFCT-5801A (Black Case)
				SC	2x9	HFCT-5801C (Blue Case)
			SFF PTH	LC	2x10	HFCT-5962ATG (no nose shield)
				LC	2x10	HFCT-5962ATL
				LC	2x10	HFCT-5964ATG (SD LV TTL, no nose shield)
				LC	2x10	HFCT-5964ATL (Signal Detect LV TTL)
				LC	2x5	HFCT-5961ATG (No nose shield)
				LC	2x5	HFCT-5961ATL
				LC	2x5	HFCT-5963ATG (SD LV TTL, no nose shield)
				LC	2x5	HFCT-5963ATL (Signal Detect LV TTL)
			SFP	LC	Pluggable	HFCT-5760ATL (w/o diagnostic monitoring interface "DMI"), std de-latch
				LC	Pluggable	HFCT-5760ATP (w/o diagnostic monitoring interface "DMI"), bail de-latch

METRAK Solutions for Metro Network

OC-3/SONET/SDH SFF/SFP Fiber Optic Transceivers Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
OC-3 Long Reach 40 km 1300 nm (Single Mode)	0 to 70°C	5 V	Duplex	SC	1x9	HFCT-5215B (Black Case)
				SC	1x9	HFCT-5215D (Blue Case)
		3.3 V	SFF PTH	LC	2x10	HFCT-5962NG (No nose shield)
				LC	2x10	HFCT-5962NL
				LC	2x10	HFCT-5964NG (SD LV TTL, no nose shield)
				LC	2x10	HFCT-5964NL (Signal Detect LV TTL)
				LC	2x5	HFCT-5961NG (No nose shield)
				LC	2x5	HFCT-5961NL
				LC	2x5	HFCT-5963NG (SD LV TTL, no nose shield)
				LC	2x5	HFCT-5963NL (Signal Detect LV TTL)
				MTRJ	2x5	HFCT-5915E
			SFP	LC	Pluggable	HFCT-5760NL (w/o diagnostic monitoring interface "DMI"), std de-latch
				LC	Pluggable	HFCT-5760NP (w/o diagnostic monitoring interface "DMI"), bail de-latch
				LC	Pluggable	HFCT-5760ANL (w/o diagnostic monitoring interface "DMI"), std de-latch
				LC	Pluggable	HFCT-5760ANP (w/o diagnostic monitoring interface "DMI"), bail de-latch

METRAK Solutions for Metro Network

OC-12/SONET/SDH SFF/SFP Fiber Optic Transceivers Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
OC-12 Short Reach 500 m 1300 nm (Multi-Mode)	0 to 70°C	5 V	Duplex	SC	1x9	HFBR-5208EM (Extended shield)
				SC	1x9	HFBR-5208FM (Flush shield)
				SC	1x9	HFBR-5208M (No shield, metallized housing)
		3.3 V	SFF PTH	MTRJ	2x5	HFBR-5908E (With nose shield)
	-40 to +85°C	5 V	Duplex	SC	1x9	HFBR-5208AEM (Extended shield)
				SC	1x9	HFBR-5208AFM (Flush shield)
				SC	1x9	HFBR-5208AM (No shield, metallized housing)
OC-12 Intermediate Reach 15 km 1300 nm (Single Mode)	0 to 70°C	5 V	Duplex	SC	1x9	HFCT-5208EM (Extended shield)
				SC	1x9	HFCT-5208FM (Flush shield)
				SC	1x9	HFCT-5208M (No shield, metallized housing)
		3.3 V	SFF PTH	LC	2x10	HFCT-5952TG (No nose shield)
				LC	2x10	HFCT-5952TL
				LC	2x5	HFCT-5951TG (No nose shield)
				LC	2x5	HFCT-5951TL
				LC	2x5	HFCT-5954TG (No nose shield, multi-rate)
				LC	2x5	HFCT-5954TL (Multi-rate)
				LC	2x5	HFCT-5953TG (No nose shield, multi-rate)
				LC	2x5	HFCT-5953TL (Multi-rate)
				MTRJ	2x5	HFCT-5908E (With nose shield)
			SFP	LC	Pluggable	HFCT-5750TL (w/o diagnostic monitoring interface "DMI"), std de-latch
				LC	Pluggable	HFCT-5750TP (w/o diagnostic monitoring interface "DMI"), bail de-latch
	-40 to +85°C	5 V	Duplex	SC	1x9	HFCT-5208AEM (Extended shield)
				SC	1x9	HFCT-5208AFM (Flush shield)
				SC	1x9	HFCT-5208AM (No shield, metallized housing)
		3.3 V	SFF PTH	LC	2x10	HFCT-5952ATG (No nose shield)
				LC	2x10	HFCT-5952ATL
				LC	2x5	HFCT-5951ATG (No nose shield)
				LC	2x5	HFCT-5951ATL
				LC	2x10	HFCT-5954ATG (No nose shield, multi-rate)
				LC	2x10	HFCT-5954ATL (Multi-rate)
				LC	2x5	HFCT-5953ATG (No nose shield, multi-rate)
				LC	2x5	HFCT-5953ATL (Multi-rate)
			SFP	LC	Pluggable	HFCT-5750ATL (w/o diagnostic monitoring interface "DMI"), std de-latch
				LC	Pluggable	HFCT-5750ATP (w/o diagnostic monitoring interface "DMI"), bail de-latch
OC-12 Long Reach 40 km 1300 nm (Single Mode)	0 to 70°C	3.3 V	SFF PTH	LC	2x10	HFCT-5952NG (No nose shield)
				LC	2x10	HFCT-5952NL
				LC	2x5	HFCT-5951NG (No nose shield)
				LC	2x5	HFCT-5951NL

METRAK Solutions for Metro Network

OC-48/SONET/SDH SFF/SFP Fiber Optic Transceivers Selection Guide

	Temp	Voltage	Package	Connector	Pin-Out	Part Number
OC-48 Short Reach 2 km 1300 nm (Single-Mode)	0 to 70°C	3.3 V	SFF PTH	LC	2x10	HFCT-5942G (no nose shield)
				LC	2x10	HFCT-5942L
				LC	2x5	HFCT-5941G (no nose shield)
				LC	2x5	HFCT-5941L
				LC	2x10	HFCT-5944L (Multi-rate)
				LC	2x10	HFCT-5944G (No nose shield, multi-rate)
				LC	2x5	HFCT-5943L (Multi-rate)
				LC	2x5	HFCT-5943G (No nose shield, multi-rate)
	-40 to +85°C	3.3 V	SFF PTH	LC	2x10	HFCT-5942AG (no nose shield)
				LC	2x10	HFCT-5942AL
				LC	2x5	HFCT-5941AG (no nose shield)
				LC	2x5	HFCT-5941AL
				LC	2x10	HFCT-5944AL (Multi-rate)
				LC	2x10	HFCT-5944AG (No nose shield, multi-rate)
				LC	2x5	HFCT-5943AL (Multi-rate)
				LC	2x5	HFCT-5943AG (No nose shield, multi-rate)
OC-48 Intermediate Reach 15 km 1300 nm (Single Mode)	0 to 70°C	3.3 V	SFF PTH	LC	2x10	HFCT-5942TG (no nose shield)
				LC	2x10	HFCT-5942TL
				LC	2x5	HFCT-5941TG (no nose shield)
				LC	2x5	HFCT-5941TL
				LC	2x10	HFCT-5944TL (Multi-rate)
				LC	2x10	HFCT-5944TG (No nose shield, multi-rate)
				LC	2x5	HFCT-5943TL (Multi-rate)
				LC	2x5	HFCT-5943TG (No nose shield, multi-rate)
	-20 to +85°C	3.3 V	SFF PTH	LC	2x10	HFCT-5942ATG (no nose shield)
				LC	2x10	HFCT-5942ATL
				LC	2x5	HFCT-5941ATG (no nose shield)
				LC	2x5	HFCT-5941ATL
				LC	2x10	HFCT-5944ATL (Multi-rate)
				LC	2x10	HFCT-5944ATG (No nose shield, multi-rate)
				LC	2x5	HFCT-5943ATL (Multi-rate)
				LC	2x5	HFCT-5943ATG (No nose shield, multi-rate)

Industrial Networking Solutions

650 nm discrete optical components selection guide

Data Rate	Transmitter	Receiver	Distance (@ 0-70°C)		Connectors	Application Note
			POF	HCS		
DC-40kBd	HFBR-1523 HFBR-1533	HFBR-2523 HFBR-2533	110 m		Versatile Link	AN1035
DC-1MBd	HFBR-1522 HFBR-1532	HFBR-2522 HFBR-2532	45 m		Versatile Link	AN1035
DC-2MBd	HFBR-1505C	HFBR-2505C	50 m		SMA	
DC-4MBd	HFBR-1604	HFBR-2602	40 m		SMA	
DC-5MBd	HFBR-1521 HFBR-1531	HFBR-2521 HFBR-2531	20 m		Versatile Link	AN1035
DC-10MBd	HFBR-1505A HFBR-1515B HFBR-1528	HFBR-2505A HFBR-2515B HFBR-2528	40 m	200 m	SMA Versatile Link	ST AN1080
DC-16MBd	HFBR-1506AM	HFBR-2506AM	40 m	200 m	SMA	
DC-32MBd	HFBR-1527 HFBR-1537	HFBR-2526 HFBR-2536	40 m	1000 m	Versatile Link	AN1121
32MBd	HFBR-1527 HFBR-1537	HFBR-2526 HFBR-2536	75 m	400 m	Versatile Link	AN1066
55MBd	HFBR-1527 HFBR-1537	HFBR-2526 HFBR-2536	60 m	240 m	Versatile Link	AN1066
125MBd	HFBR-1527 HFBR-1537	HFBR-2526 HFBR-2536	30 m	100 m	Versatile Link	AN1066
160MBd(N.A.= 0.375)	HFBR-1527 HFBR-1537	HFBR-2526 HFBR-2536	50 m	50 m	Versatile Link	AN1123

820 nm discrete optical components selection guide

Data Rate	Transmitter	Receiver	Distance (@ 0-70°C) 62.5/125 µm MM fiber	Connectors	Application Note
DC-5 MBd	HFBR-14X4	HFBR-24X2	2000 m	ST, SMA, FC	
20 MBd	HFBR-14X4	HFBR-24X6	2700 m	ST, SC, SMA	AN1038
20 Mb	HFBR-1312T*	HFBR-2316T*	5000 m	ST	AN1038
32 MBd	HFBR-14X4	HFBR-24X6	2200 m	ST, SC, SMA	AN1065
32 MBd	HFBR-1312T*	HFBR-2316T*	3200 m	ST	AN1065
55 MBd	HFBR-14X4	HFBR-24X6	1400 m	ST, SC, SMA	AB78
55 MBd	HFBR-1312T*	HFBR-2316T*	3200 m	ST	AB78
125 MBd	HFBR-14X4	HFBR-24X6	700 m	ST, SC, SMA	AB78
125 MBd	HFBR-1312T*	HFBR-2316T*	2800 m	ST	AB78
155 MBd	HFBR-14X4	HFBR-24X6	600 m	ST, SC, SMA	AB78
155 MBd	HFBR-1312T*	HFBR-2316T*	2700 m	ST	AB78
160 MBd	HFBR-14X4	HFBR-24X6	500 m	ST, SC, SMA	AN1123
160 MBd	HFBR-1312T*	HFBR-2316T*	2000 m	ST	AN1123

*1300 nm

Industrial Networking Solutions

Ordering Guide for POF and HCS Connectors and Accessories

Plastic Optical Fiber Connectors

HFBR-4501/11	Gray/Blue Simplex Connector/Crimp Ring
HFBR-4503/13	Gray/Blue Simplex Latching Connector with Crimp Ring
HFBR-4506/16	Parchment/Gray Duplex Connector with Crimp Ring
HFBR-4505/15	Gray/Blue Adapter (Bulkhead/Feedthrough)
HFBR-4531/32	Crimless Simplex Non-latching/Latching Connector

Plastic Optical Fiber Accessories

HFBR-4522	500 HFBR-0500 Products Port Plugs
HFBR-4525	1000 Simplex Crimp Rings
HFBR-4526	500 Duplex Crimp Rings
HFBR-4593	Polishing Kit (one polishing tool, two pieces 600 grit abrasive paper, and two pieces 3 µm pink lapping film)
HFBR-4597	Plastic Fiber Crimping Tool

www.agilent.com
www.agilent.com/view/networking

Agilent Technologies is a leading provider of innovative technologies for communications and life sciences. Agilent delivers a wide range of solutions and services, including semiconductors, test and measurement, and chemical analysis, for the leading corporations around the world.

Agilent's communications solutions include leading-edge components, test, monitoring, management, and sub-systems for optical and wireless systems and networks. Agilent has an extremely broad range of technology and system expertise to help customers stay ahead in the fast-moving communications industry.

Agilent's semiconductor solutions for the connected world include fiber-optic and IC products for networking, radio frequency and infrared devices for mobile communications, image sensors for cameras and optical computer mice, storage area network solutions, and applications specific IC for networking and imaging.

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6271 2451

India, Australia, New Zealand: (+65) 6271 2394

Japan: (+81 3) 3335-8152 (Domestic/International), or
0120-61-1280 (Domestic Only)

Korea: (+65) 6271 2194

Malaysia, Singapore: (+65) 6271 2054

Taiwan: (+65) 6271 2654

Data subject to change.

Copyright © 2003 Agilent Technologies, Inc.

Obsoletes 5988-7201EN

July 3, 2003

5988-9761EN



Agilent Technologies