


Agilent E1439A/B 95 MSa/s Digitizer with 70 MHz IF Input

Data Sheet

The Agilent E1439A/B is ideal for applications in RF signal acquisition, analysis, and high-resolution ATE. It has a baseband input and a 70 MHz IF input, both with 36 MHz bandwidth. The single-channel 95 MSa/s digitizer combines exceptional spurious-free dynamic range with alias-protected signal conditioning, center-frequency tunable digital filters, and a large signal capture memory, all in a single-wide C-size VXI module.

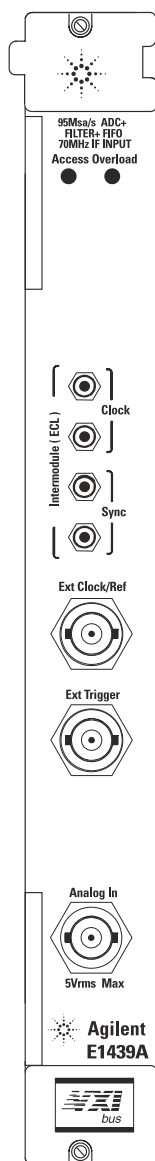

Agilent Technologies

Specifications

Input Specifications	
Input Characteristics	BNC Connector, shell grounded to chassis. 50Ω Impedance. DC Coupled or ac Coupled through 0.2 μF capacitor. Input signal can be switched to ground. 36 MHz anti-alias filter with bypass switch.
Input Ranges	
Baseband Path	One range, –21 dBm, 28.2 mVp
70 MHz IF Path	–36 dBm to +12 dBm, in 1 dB steps 5.02 mVp to 1.26 Vp, in 1 dB steps
ADC Overload Level	0 dBfs (typical)
Maximum Input Power	+24 dBm
Return Loss of 50Ω Input Impedance	
Baseband Path, 0.1 to 36 MHz	>15 dB (1.4 : 1 VSWR)
70 MHz IF Path, 52 to 88 MHz	>9 dB (2.1 : 1 VSWR)
Amplitude Accuracy (Power measurement, 0 to –40 dBfs, anti-alias filter ON)	
Baseband Path, at 10 MHz	±0.7 dB
70 MHz IF Path, at 70 MHz	±1.5 dB
Flatness (Excluding digital filter response)	
Baseband Path, 0 to 36 MHz, relative to 10 MHz	+0.5, –1.2 dB
Baseband Path, AAF off, at 100 MHz	–15 dB (typical)
70 MHz IF Path, 52 to 88 MHz, relative to 70 MHz	+0.5, –3.0 dB
Phase Response Deviation from Linear Phase (Group delay) (excluding digital filter response)	
Baseband Path, 10 to 36 MHz	<30 ns (typical)
70 MHz IF Path, 52 to 88 MHz	<120 ns (typical)
DC Offset, Baseband Path	
Auto-zero accuracy	±5% fs (typical)
Temperature drift	<±0.1 mV / °C (typical)
Input Bias Current, Baseband Path	<100 μA (typical)
IF Filter and Anti-alias Filter Stopband Rejection (input range ≤0 dBm)	
Baseband Path, 59 MHz to 200 MHz	>65 dB
70 MHz IF Path, 0 to 43 MHz and 102 to 200 MHz	>75 dB
Signal-to-Noise Ratio (full scale input, full bandwidth, excluding distortion, anti-alias filter on. See noise, distortion and spur specs)	>60 dB (typical)

Input Noise Density

(before applying amplitude flatness correction,
anti-alias filter on, internal sample clock)

Baseband Path

100 kHz to 36 MHz	<–132 dBfs/Hz
10 kHz to 100 kHz	<–130 dBfs/Hz
1 kHz to 10 kHz	<–122 dBfs/Hz
100 Hz to 1 kHz	<–(–92 –10 LOG(f)) dBfs/Hz
Sensitivity:	<–154 dBm/Hz (typical)

70 MHz IF Path

0 dBm range, 52 kHz to 88 MHz	<–132 dBfs/Hz
Sensitivity, on most sensitive range	<–163 dBm/Hz

Residual Responses

(with 50 Ω termination at input connector,
in-band responses)

<–90 dBfs

**Harmonic Distortion, Aliased Harmonic Distortion,
and Spurious Responses.**

IF path input signal amplitudes ≤ 0 dBm.
20–30° C (add 3 dB at other temperatures)

IF path, input signals 0 to –9 dBfs	<–62 dBc
BB path, input signals 0 to –9 dBfs	<–65 dBc
input signals –9 to –20 dBfs	<–70 dBc
input signals <–20 dBfs	<–70 dBc or <–90 dBfs

Intermodulation Distortion

Two in-band signals 1 MHz apart, ≤ 0 dBm.
Measured in dBc, relative to one signal.
Includes 2nd order and 3rd order distortion of the
baseband path, and 3rd order distortion of the IF path
(add 3 dB for 2nd order distortion of IF path).
20° C to 30° C (add 3 dB at other temperatures)

Each signal –6 to –14 dBfs	<–65 dBc
Each signal –14 to –20 dBfs	<–70 dBc
Each signal <–20 dBfs	<–70 dBc or <–90 dBfs
3 rd Order distortion, each input –16 dBfs	–80 dBc (typical)

Phase Noise Density

(single sideband power density, absolute or residual.
<0.05 G vibration, Block data transfer mode. See Note 1)

Baseband Path, 10 MHz signal

$\Delta f = 10$ kHz	<–128 dBc/Hz (typical)
$\Delta f = 1$ kHz	<–120 dBc/Hz (typical)
$\Delta f = 100$ Hz, residual only	<–110 dBc/Hz (typical)

IF Path, 80 MHz signal

$\Delta f = 10$ kHz	<–110 dBc/Hz (typical)
$\Delta f = 1$ kHz	<–102 dBc/Hz (typical)
$\Delta f = 100$ Hz, residual only	<–92 dBc/Hz (typical)

Discrete Sidebands

(5 Hz to 100 kHz Δf , see Notes 1 and 2)

Baseband Path, 10 MHz signal

$\Delta f > 20$ kHz	<–90 dBc
$\Delta f < 20$ kHz	<–90 dBc (typical, Note 1)
Inter-module clock via VXI lines	<–80 dBc (typical)

IF Path, 80 MHz signal

$\Delta f > 20$ kHz	<–72 dBc
$\Delta f < 20$ kHz	<–72 dBc (typical, Note 1)

Note 1. Phase Noise and Sidebands performance at
frequency offsets of less than 20 kHz may be degraded
by noise and ripple on the VXI power supplies.


Note 2. Specifications for Dynamic Range, Spurious
Responses and Sidebands require the mainframe
containing the E1439 to have Option 918 (connector
shields E1400-80920) installed. In addition, all mod-
ules in the mainframe must comply with the VXI 1.4
specification for ECL trigger lines, the 10 MHz VXI
system clock must be turned off, and the E1439
External Clock input must be disconnected when not
being used. Dynamic range specifications require
24-bit data resolution, and the level of any External
Clock or External Reference must be at least 0 dBm.

Sample Clock and DSP Specifications	
Clock Sources	
Internal sample clock frequency	95 MSa/s
External reference for internal clock	10 MHz
External sample clock frequency range	10 MHz to 102.4 MHz, baseband only
Internal Clock Specifications	
Frequency accuracy, 0—40° C	±7 ppm
Frequency accuracy, 40—55° C	±10 ppm
External reference lock range	±6 ppm (typical)
Clock Input/Output Characteristics	
External sample clock/reference input	BNC connector. ac-coupled comparator with 1 K Ω impedance. Accepts TTL, ECL, or >−6 dBm sine waves
Trigger input	BNC connector. ac-coupled comparator with 1 K Ω impedance. Detects pulses >300 ns with edges >100 mV
Inter-module front panel clock/sync	SMB connector, ECL-10K compatible.
Inter-module VXI backplane clock/Sync	VXI backplane ECLTRG lines.
10 MHz reference output	SMB connector +8 dBm
Multi-module Sampling Skew	
Within mainframe, uncorrected	<10 ns (typical)
Between mainframes, 1 meter cable, uncorrected	<25 ns (typical)
Resolution of correction	5 ps (nominal)
Digital Decimation Filters	17 octave steps (40 MHz to 305 Hz), <0.215 dB ripple, software correctable
Digital Local Oscillator	<0.01 Hz tuning resolution
Regulatory Compliance	
Safety Standards	Designed for compliance to EN 61010-1(1993)
Radiated Emissions and Immunity	EN 61326-1 (see Note 2, page 3)
Environmental	
Operating Restrictions	
Maximum altitude	4600 meters, above 2285 meters derate operating temperature by −3.6° C per 1000 meters
Ambient Temperature	0—55° C
Humidity	10—90% at 40° C, non-condensing
Optical serial front panel data port (E1439B only)	
Standard support	Proposed VITA 17.1, 1 Gbit/sec and 2.5 Gbit/sec
Connector	Dual LC receptacle
Optical type	Multi-mode fiber, 850 nm wavelength
Maximum length	100 meters


Typical Performance Charts

The following charts are included as supplemental, non-warranted characteristics.


Performance Benchmarks (Benchmarks are included as supplemental, non-warranted characteristics)	
VXI/VME continous data transfer rate (From E1438A to MXI-II VXI controller, D32 VME word size)	2.2 MBytes/s
Local bus data transfer rate (From E1438A to ideal consumer)	63 MBytes/s
Library function control of module (MXI-II VXI controller)	
Measurement start	8.5 μ s
Center frequency change (raw)	600 μ s

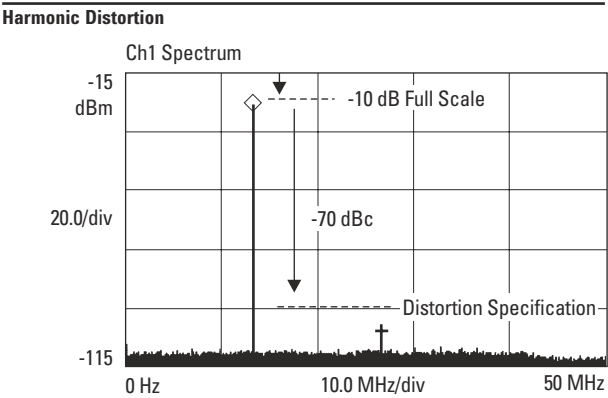


Harmonic Distortion performance with a -25 dBm 13 MHz signal on the -15 dBm range

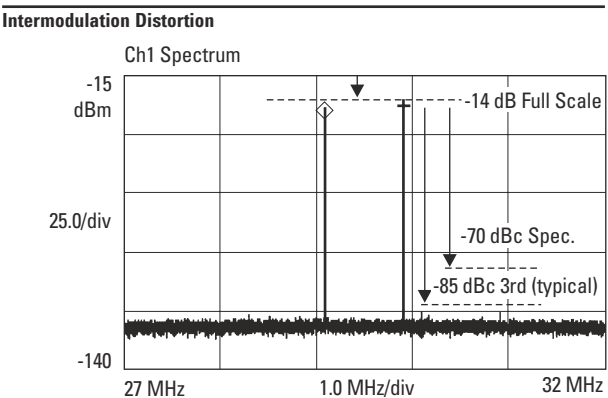


Intermodulation Distortion performance with two -14 dBfs tones near 30 MHz on the -15 dBm range.

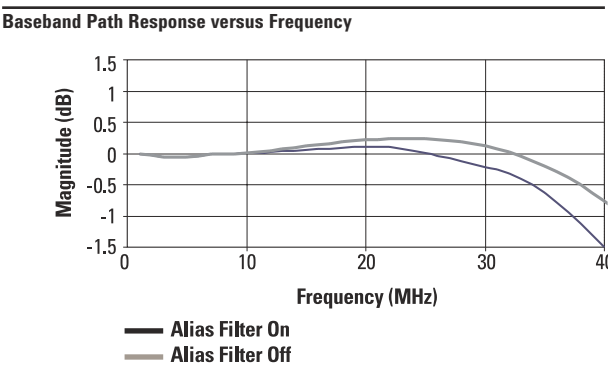

IF Path Response versus Frequency

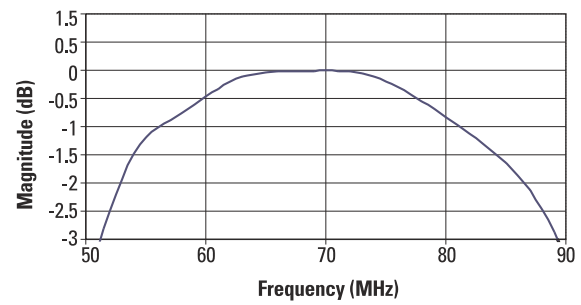

IF Path Group Delay versus Frequency

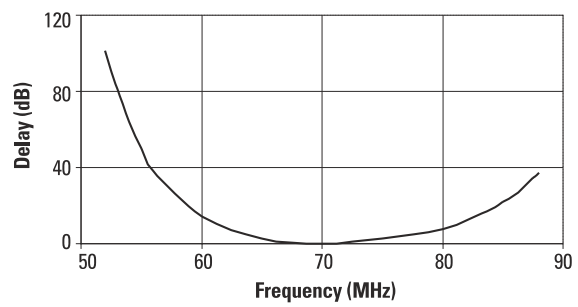

General		
VXI Standard Information	Conforms to VXI revision 1.4. See Note 1, page 3 concerning section B.8.6, Conducted Susceptibility. C-size, single slot width. Register based programming. “Slave” Data Transfer Bus functionality. A16 address capability. D16/D32 data capability. Local Bus capability Requires ECLTRG0 and ECLTRG1 lines for module synchronization.	
VXI Power Requirements	dc Current	Dynamic Current
+5 V	5.7 A	0.8 A
–5.2 V	3.0 A	0.1 A
–2 V	1.0 A	0.1 A
+12 V	1.2 A	0.3 A
–12 V	0.2 A	0.02 A
+24 V	0.04 A	0.02 A
–24 V	0.04 A	0.02 A
+5 V Standby	0.0 A	0.0 A
VXI Cooling Requirements		
For 10° C rise	3.3 liters/second, 0.67 mm H ₂ O	
For 15° C rise	2.2 liters/second, 0.30 mm H ₂ O	
Warm-up Time	15 Minutes	
Calibration Interval	1 Year (no field adjustments)	

Specification Note

Specifications describe warranted performance over a temperature range of 0–55° C, after a 15-minute warm up from ambient conditions. Supplemental characteristics identified as “typical” and “characteristic” provide useful information by giving non-warranted performance parameters. Typical performance is applicable from 20–30° C.

Abbreviations

Fs: sample rate of DAC.

Fc: cut off frequency of high pass or low pass filters.

dBfs: dB relative to full scale amplitude range.

dBc: dB relative to carrier amplitude.

Typical: Typical, non-warranted, performance specification included to provide general product information.

Warranty

This product is distributed, warranted, and supported by Agilent Technologies.

The E1439A/B comes with a 3-year warranty. During that period, the unit will either be replaced or repaired, at Agilent Technologies’ option, and returned to the customer without charge.

Ordering Information

Agilent E1439A	95 MSa/s AD with filter and memory
Option 144	144 MB FIFO memory
Option 288	288 MB FIFO memory

Related Agilent Literature

E1437A 20 MSample/Second ADC with Filter and FIFO
Product Overview
literature number 5965-6893E

E1437A 20 MSample/Second ADC with Filter and FIFO
Technical Specifications
literature number 5965-9774E

E1438A/B 100 MSample/Second Digitizer with DSP and Memory
Product Overview
literature number 5968-7348E

E1438A/B 100 MSample/Second Digitizer with DSP and Memory
Data Sheet
literature number 5968-8233E

E1439A/B VXI 70MHz IF ADC with Filters and Memory
Product Overview
literature number 5980-1261E

E9830A Delay Memory Module
Product Overview
literature number 5968-7349E

Agilent Test System and VXI Products Catalog
literature number 5980-0307E

Visit our Websites

Agilent Communications
Intelligence Information —
www.agilent.com/find/COMINT

Agilent VXI Product Information —
www.agilent.com/find/vxi

Agilent Technologies’ Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent’s overall support policy: “Our Promise” and “Your Advantage.”

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9210 5947

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.
Copyright © 2001 Agilent Technologies
Printed in USA April 3, 2001
5980-1260E



Agilent Technologies