

Model 10010-XX


Anaren

Directional Couplers

"In-Line" Style

Applications

- Subassemblies
- Lab Systems
- Leveling Loops
- Power Monitoring
- Test and Calibration

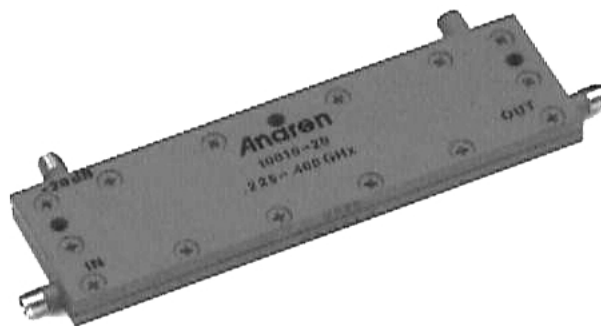

Features

- Military Grade
- 225 - 400 MHz
- "In-Line" Configuration
- Connectors Per MIL-C-39012
- Rugged Aluminum Housing
- Built in Termination


Electrical Specifications

Model#	Frequency MHz	Coupling dB Mean	Insert. Loss dB Max	Input VSWR Max:1
10010-6	225 - 400	6.0 ± 0.5	0.25	1.15
10010-10	225 - 400	10.0 ± 0.5	0.25	1.15
10010-20	225 - 400	20.0 ± 1.0	0.25	1.15
10010-30	225 - 400	30.0 ± 1.5	0.25	1.15

Model #	Freq. Sems. dB Max	Directivity dB Min/Typ	Max CW Power* Forward Backward
10010-6	±0.75	20/25	20 2
10010-10	±0.80	20/25	50 5
10010-20	±0.80	17/22	100 50
10010-30	±0.80	15/20	100 100

Notes: Electrical and Mechanical Specifications subject to change without notice. Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. *These power ratings apply when coupled port VSWR is 2.0:1 or less. Higher power can be handled with a lower VSWR termination. In general the Max CW Power is identical to 3 dB couplers when there is no internal termination or one supplied by Anaren. All models have SMA connectors.

Outline Drawing

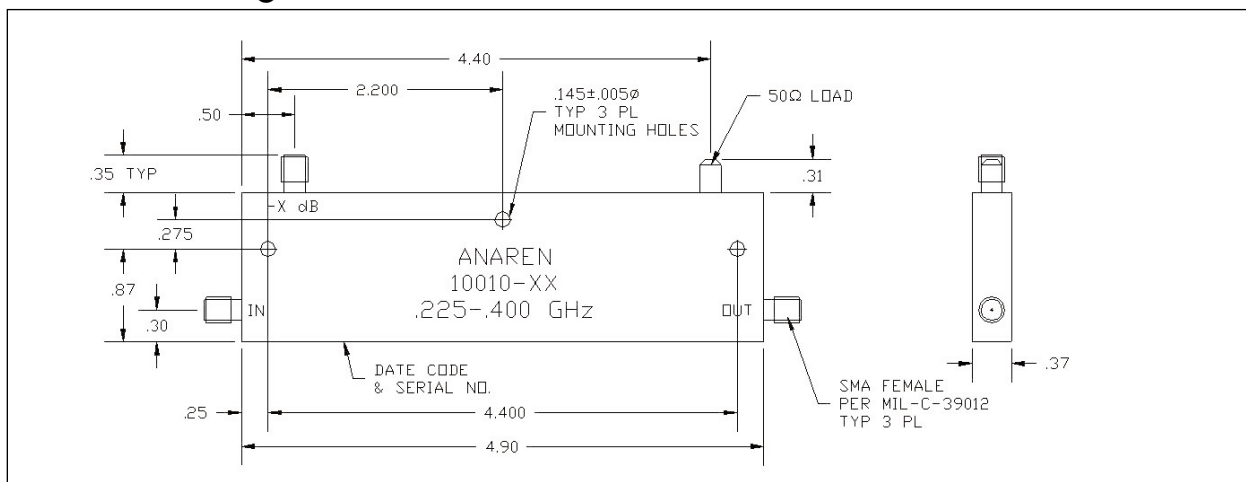

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369