


# GSM mobile test solutions

## Technical specifications

**HP 8922S**  
**GSM MS service test set**

**HP 8922M**  
**GSM MS test set**

**HP 83220A/E**  
**DCS/PCS test set**

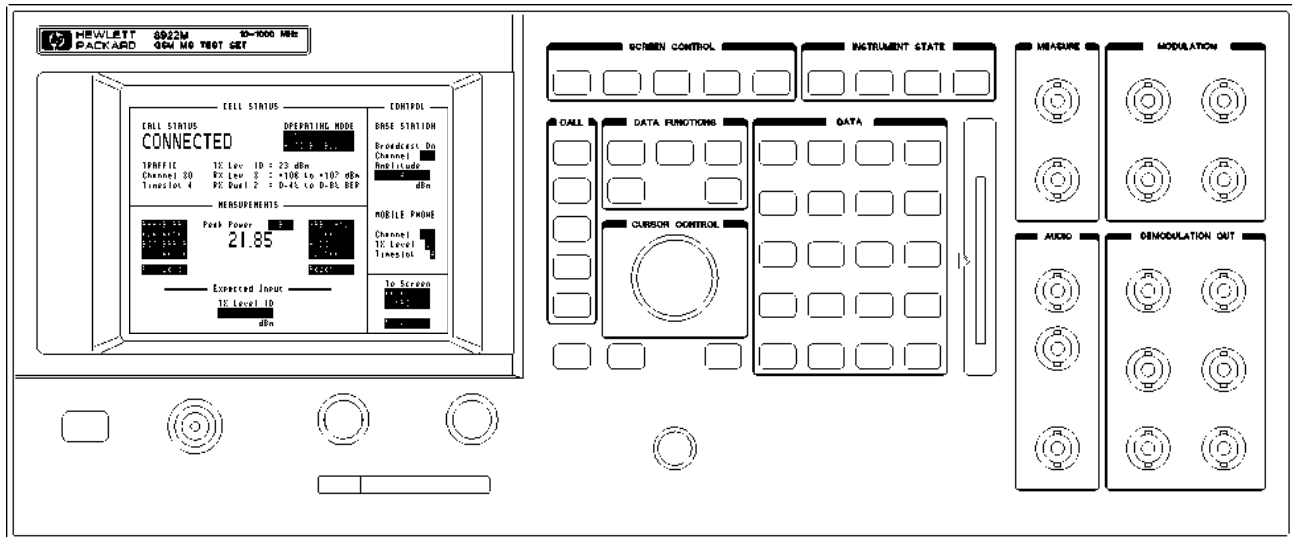

### **The first choice for GSM mobile service and repair**

Troubleshoot and find faults fast with the HP 8922S GSM MS service test set. Use it to reduce false failures with a test set that combines versatility with ease-of-use.

### **Serving the needs of the GSM mobile manufacturer**

Maximize production throughput and minimize the cost per test with the HP 8922M GSM MS test set. It offers the highest speed of test in its class while guaranteeing accurate and repeatable measurements.

### **Expand to DCS1800 or PCS1900**


Add the HP 83220A/E test set to test DCS1800 and PCS1900 mobiles.

## Contents

---

<b>HP 8922S/M test set specifications .....</b>	<b>5</b>
GSM functionality .....	5
RF generator .....	5
RF analyzer .....	6
Spectrum analyzer .....	8
Audio source .....	9
Audio analyzer .....	9
Oscilloscope .....	10
Remote programming .....	10
General .....	10
Reference .....	10
 <b>Product options .....</b>	 <b>11</b>
High stability timebase .....	11
Transit protection .....	11
Spectrum analyzer .....	11
Test SIM card .....	11
Micro test SIM card .....	11
Protocol logging .....	11
HP 83212B GSM/DCS1800 MS test software .....	11
Associated equipment .....	11
Recommended HP accessories .....	11
HP system engineering assistance .....	11
 <b>HP 83220A/E DCS/PCS test set specifications .....</b>	 <b>12</b>
RF generator .....	12
RF analyzer .....	12
General .....	13
Reference .....	13
 <b>Ordering information .....</b>	 <b>14</b>
 <b>Differences between the HP 8922S/M test sets and HP 8922F/H test sets .....</b>	 <b>15</b>

Switch on one of Hewlett-Packard's GSM test sets and you'll find your mobile finds service immediately. Now make a call and you're up and running; ready to perform all the key transmitter and receiver measurements. Built-in to every test set you'll find . . .

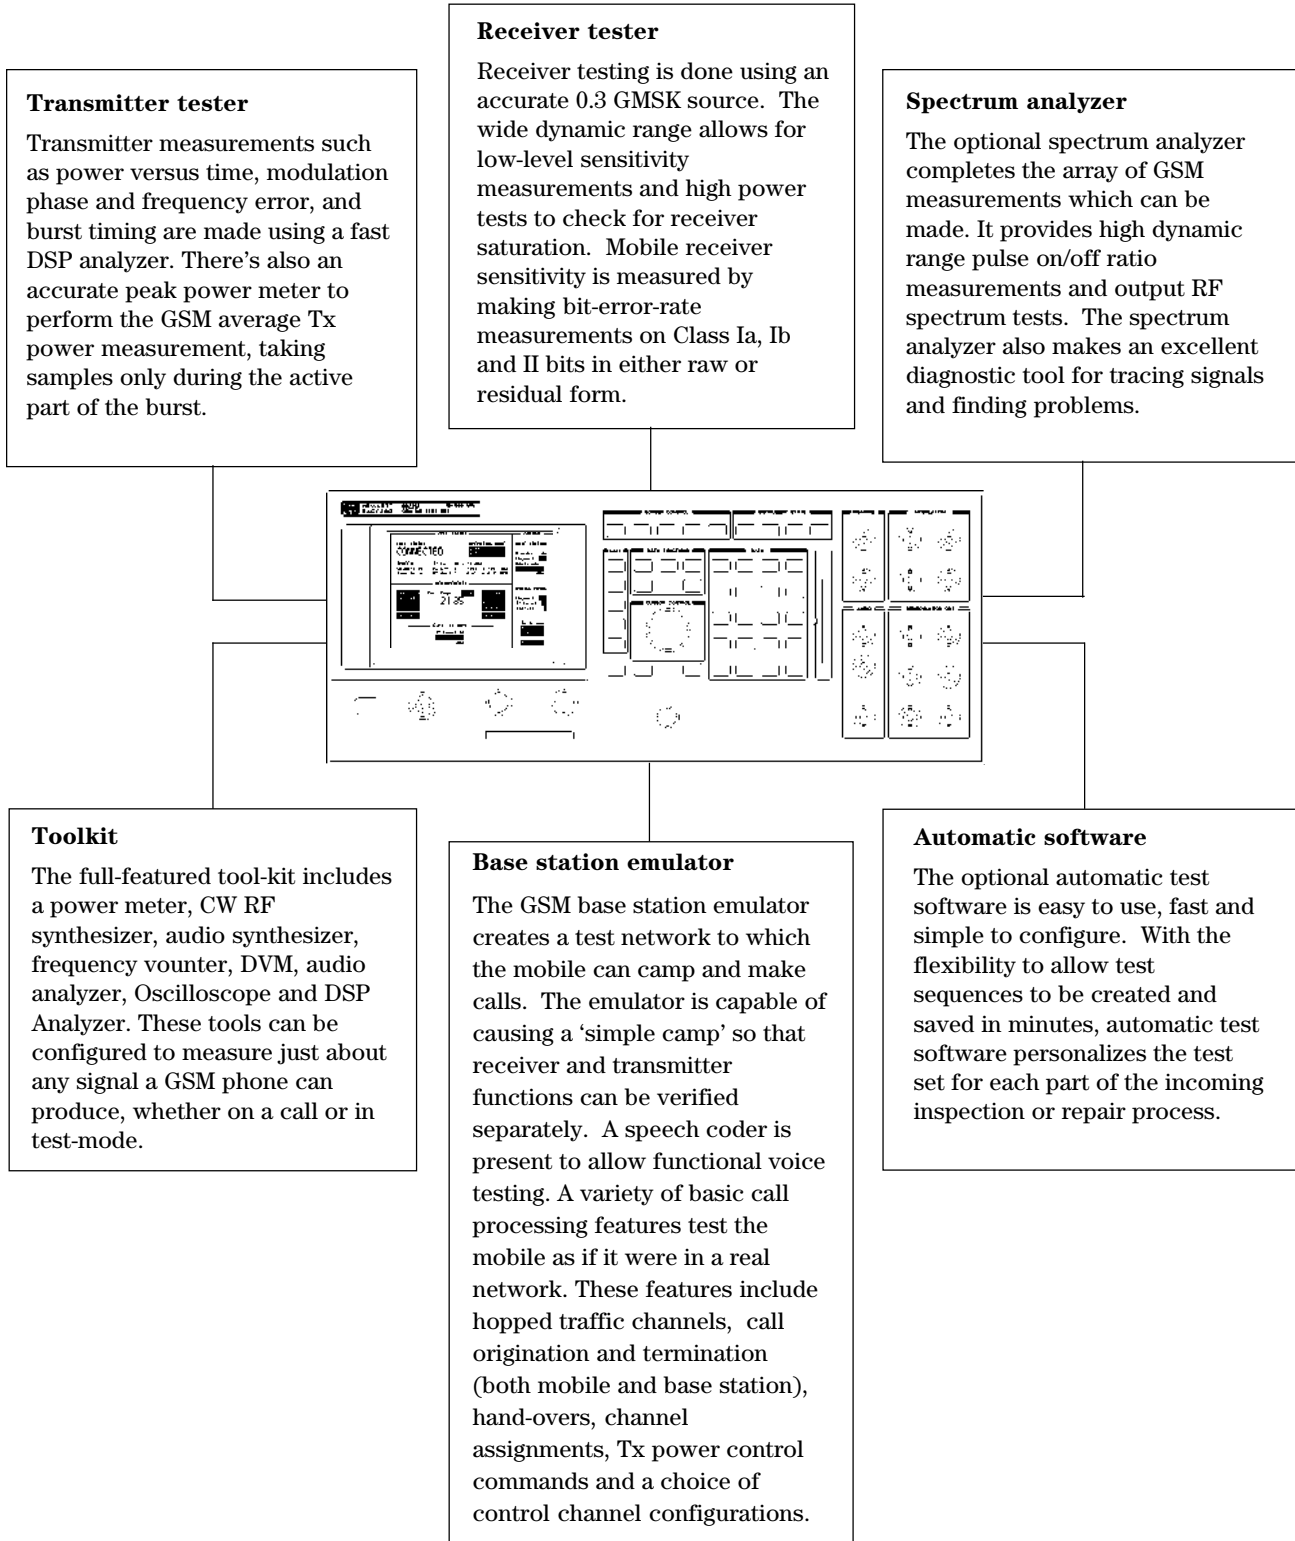

## Troubleshoot in test mode

What if the mobile is unable to find service and make a call and you can't find the source of the problem? With a single key press, the test set can be put into a special test mode, allowing unsynchronized mobile operation. The transmit and receive portion of the mobile can then be measured separately.

## Simplify mobile test

SIM (Subscriber Identity Module) cards are available to simplify mobile test by matching the information on the card (IMSI, MCC, MNC) with that on the test set. They also enable the mobile to be put into a special loop-back mode to perform the receiver bit-error-rate test.

## Compatibility

If you already own an HP 8922F/H test set, these can be upgraded to HP 8922S/M. Contact your Hewlett-Packard representative for details. You can take advantage of the higher performance without re-writing your production test code. Code written for the HP 8922G or HP 8922H test set is compatible with HP 8922M.

To facilitate traceable testing, the HP 8922S/M test sets generally follow the procedures as outlined in the associated GSM recommendations, but do not necessarily meet the exact requirements or cover all ranges, limits or conditions required for type testing.

HP 8922S/M tests	Associated GSM specifications
	11.10 tests
Transceiver frequency bands	II.2.1.1
Transceiver RF channels and numbering	II.2.1.2
Transceiver frequency hopping	II.2.1.3
Transceiver spurious emissions <sup>1</sup>	II.2.2
Tx peak transmitted power	II.3.3
Tx RF spectrum due to switching <sup>2</sup>	II.3.4
Tx RF spectrum due to modulation <sup>2</sup>	II.3.4
Tx amplitude envelope (top 30 dB, and -70 dBc point)	II.3.3
Tx phase error and frequency error	II.3.1
Rx sensitivity	II.4.2
Rx usable input level range	II.4.3
Rx co-channel rejection <sup>3</sup>	II.4.4
Rx adjacent channel rejection (same frequency/different timeslot) (different frequency/same timeslot) <sup>3</sup>	II.4.5
Rx intermodulation rejection <sup>3</sup>	II.4.6
Rx blocking and spurious response <sup>4</sup>	II.4.7
Timebase tuning range	Production test

<sup>1</sup> The HP 8922S/M have limited capability for this measurement (< 1 GHz, and limited resolution bandwidth and spans).

<sup>2</sup> The HP 8922S/M test set use a 3 pole resolution Bandwidth filter to make these measurements.

<sup>3</sup> HP 8922M test set only; an additional RF source, such as the HP 8657 Option 022 0.3 GMSK signal generator, is required to make this measurement.

<sup>4</sup> An additional CW RF source (frequency range of 100 kHz to 12.75 GHz, no modulation needed) is required to make this measurement.

# HP 8922S/M test set specifications

Specifications describe the instrument's warranted performance and apply after a 30 minute warm-up. These specifications are valid over its operating/environmental range unless otherwise noted.

**Supplemental characteristics** (shown in *italics*) are intended to provide additional information, useful in applying the instrument by giving typical (expected), but not warranted performance parameters. These characteristics are shown in *italics* or labeled as 'typical', 'useable to' or 'nominal'.

## GSM functionality

**Bit/frame error rate measurements:** Class Ia, Ib, and Class II bits in both raw and residual form.

**MS power output level control:** 0 to 15 with RF analyzer auto adjust.

**Broadcast channel capability:** BCCH+CCCH or BCCH+CCCH+SDCCH/4.

**Control channels (SDCCH, FACCH, SACCH):** BCCH+CCCH, BCCH+CCCH+SDCCH/4, SDCCH/8 (non-hopped), SACCH/FACCH.

**Call control capabilities:** BS originated cell (FS), MS originated call (FS), MS camp-on, BS call disconnect, MS call disconnect.

**Traffic channels:** TCH/FS.

**Timing:** Auto, manual, uplink-downlink and offset measurement.

**Hopping:** Two independent, user definable MA tables with offsets.

**Speech encoding/decoding:** Full rate speech.

**Speech echo mode:** User selectable delay 0 to 5 seconds.

**Measurement coordination:** Flexible control of burst type, ARFCN and timeslot.

**SACCH MEAS result:** RXLEV, RXQUAL and timing advance.

## RF generator specifications

### Frequency

**Range:** 10 MHz to 1 GHz.

**Resolution:** 1 Hz.

**Accuracy:** Reference accuracy  $\pm 0.5$  Hz.

**Stability:** Same as reference.

#### **Supplemental characteristics**

**Frequency overrange:** *To 1015 MHz with uncalibrated output and modulation.*

**Switching speed:** *577  $\mu$ s over the GSM frequency bands<sup>5</sup> in hop mode (refer to 0.3 GMSK modulation specs).*

## Output

### RF in/out connector

**Level range:** -14 to -127 dBm, max overrange power > -12 dBm max.

**Level resolution:** 0.1 dB.

**Level accuracy**<sup>6</sup>

**GSM bands**<sup>5</sup>:  $\pm 1.0$  dB, levels  $\geq -127$  dBm.

*$\pm 1.0$  dB, typically for levels  $\geq -127$  dBm while hopping.*


50 MHz to 1 GHz:  $\pm 1.5$  dB, levels  $\geq -107$  dBm;

$\pm 2.0$  dB, levels  $\geq -127$  dBm.

10 MHz to 50 MHz:  $\pm 2.0$  dB, levels  $\geq -107$  dBm;

$\pm 2.5$  dB, levels  $\geq -127$  dBm.

### Typical RF generator RF in/out level error at -104 dBm

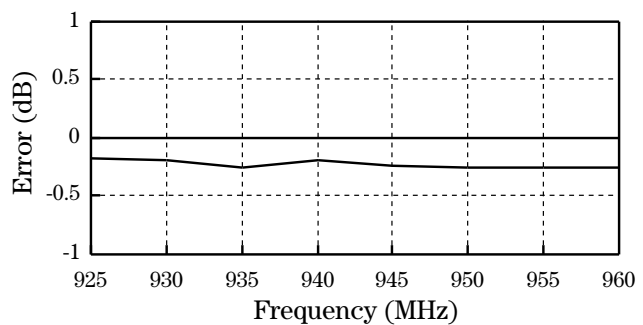

**Reverse power:** 15 W continuous. 100 W for 10 seconds/minute.

**SWR:** 1.5:1.

### Aux RF out connector

**Level range:** +4 to -127 dBm.

**Level resolution:** 0.1 dB.

**Level accuracy**

**GSM bands**<sup>5</sup>:  $\pm 1.0$  dB, levels  $\geq -107$  dBm.

*$\pm 1.0$  dB, typically for levels  $\geq -107$  dBm while hopping.*

50 MHz to 1 GHz:  $\pm 1.5$  dB, levels  $\geq -107$  dBm;

$\pm 2.0$  dB, levels  $\geq -127$  dBm.

10 MHz to 50 MHz:  $\pm 2.0$  dB, levels  $\geq -107$  dBm;

$\pm 2.5$  dB, levels  $\geq -127$  dBm.

**Reverse power:** 200 mW.

**SWR:** 2.0:1, level < -4 dBm.

## Spectral purity

**Spurious signals:** (for  $\leq +1$  dBm output level at aux RF out, or  $\leq -19$  dBm output level at RF in/out.)

**Harmonics:** < -25 dBc.

**Non-harmonics:** < -50 dBc, > 5 kHz offset from carrier.

<sup>5</sup> GSM frequency bands are 880 to 915 MHz and 925 to 960 MHz.

<sup>6</sup> Level accuracy degrades 0.2 dB when using the RF in/out connector for both RF generator and RF analyzer. In 30 dB pulse mode, level accuracy specifications are typical.

## HP 8922S/M test set specifications

---

### 0.3 GMSK modulation

After one timeslot, 577  $\mu$ s, from an isolated RF generator trigger in the GSM frequency bands<sup>5</sup>.

**Phase error:**  $\leq 1^\circ$  rms.

**Peak phase error:**  $\leq 4^\circ$  peak.

**Frequency error:**  $\pm [0.02 \text{ ppm (18 Hz) + reference accuracy}]$ , for normal bursts.

*Typically  $\pm [0.03 \text{ ppm (27 Hz) + reference accuracy}]$ , for RACHs.*

**Amplitude flatness:**  $\pm 0.25 \text{ dB peak}$ .

**Clock input** (HP 8922M test set only)

**Frequency:** 270.833 kHz  $\pm 2 \text{ Hz}$  (relative to reference).

**Level:** TTL.

**Data input** (HP 8922M test set only)

**Format:** Non differentially encoded input.

**Level:** TTL.

#### **Supplemental characteristics**

*After three timeslots, 1.73 ms, from an isolated RF generator trigger in the GSM frequency bands<sup>5</sup>.*

**Phase error:**  $\leq 0.5^\circ$  rms.

**Peak phase error:**  $\leq 2.0^\circ$  peak.

**Frequency error:**  $\pm [0.01 \text{ ppm (9 Hz) + reference accuracy}]$  for normal bursts.

*Typically  $\pm [0.02 \text{ ppm (18 Hz) + reference accuracy}]$  for RACH bursts.*

### Pulse modulation

**Input levels** (HP 8922M test set only): TTL.

**Rise/fall time (10% to 90%):**  $\leq 5 \mu\text{s}$ .

#### **Supplemental characteristics**

**On/off ratio:**  $> 80 \text{ dB}$ .

### 30 dB pulse modulation (HP 8922M test set only)

All timeslots 30 dB higher than desired/active timeslot, to test adjacent timeslot rejection.

**Input levels:** TTL.

**Rise/fall time (10 to 90%):**  $\leq 5 \mu\text{s}$ .

### AM for level control (HP 8922M test set only)

For output levels  $\leq +1 \text{ dBm}$  at aux RF out or  $\leq -19 \text{ dBm}$  at RF in/out.

#### **Supplemental characteristics**

##### **Input**

**Range:**  $-1.0 \text{ V}$  to  $+0.6 \text{ V}$ .

**Impedance:** 600 ohm nominal, dc coupled.

**Sensitivity:** 100% AM per volt, nominal.

**Calibration:** 0 Vdc input produces calibrated output from the RF generator.

**Rise/fall time (10 to 90%):**  $\leq 10 \mu\text{s}$ .

## RF analyzer specifications

### Frequency

**Range:** 10 MHz to 1 GHz.

**Resolution:** 1 Hz.

#### **Hop mode**

**Resolution:** 100 kHz.

**Offset frequency:**  $\leq 50 \text{ kHz}$ .

**Offset resolution:** 1 Hz.

**RF in/out SWR:**  $< 1.5:1$ .

#### **Supplemental characteristics**

**Frequency overrange:** To 1015 MHz.

**Offset resolution:** 500 Hz for FM demodulation out.

### CW RF frequency measurement

**Range:** 10 MHz to 1 GHz.

#### **Level range**

**RF in/out:**  $-6$  to  $+41 \text{ dBm}$ .

**Aux RF in:**  $-36$  to  $+20 \text{ dBm}$ .

**Input frequency setting range:**  $\pm 500 \text{ kHz}$ .

**Accuracy:**  $\pm (1 \text{ Hz} + \text{reference accuracy})$ .

#### **Supplemental characteristics**

**Minimum resolution:** 1 Hz.

### CW RF power measurements (RF in/out only)

**Range:** 90 MHz to 1 GHz.

**Level range:**  $-5$  to  $+41 \text{ dBm}$ .

**Input frequency setting range:**  $\pm 500 \text{ kHz}$ .

**Accuracy:**  $(+4 \text{ to } +41 \text{ dBm}) \pm 0.5 \text{ dB} \pm \text{noise effects}$  (0.2 mW).

#### **Supplemental characteristics**

**Minimum resolution:** 0.01 dB.

**Accuracy:**  $(-5 \text{ to } +4 \text{ dBm}) \pm 0.5 \text{ dB} \pm \text{noise effects}$  (0.2 mW)

### Peak transmitter carrier power measurement

RF in/out only. After one timeslot, 577  $\mu$ s, from an isolated receiver hop trigger in the GSM bands<sup>1</sup>.

**Range:** 90 MHz to 1 GHz.

**Level range:**  $-5$  to  $+41 \text{ dBm}$ .

**Input frequency setting range:**  $\pm 10 \text{ kHz}$ .

**Input level setting range:**  $\pm 3 \text{ dB}$ .

**Accuracy:**  $(+4 \text{ to } +41 \text{ dBm}) \pm 0.6 \text{ dB} \pm \text{noise effects}$  (0.2 mW).

#### **Supplemental characteristics**


**Minimum resolution:** 0.2 dB.

**Accuracy:**  $(-5 \text{ to } +4 \text{ dBm}) \pm 0.6 \text{ dB} \pm \text{noise effects}$  (0.2 mW).

<sup>1</sup> GSM frequency bands are 880 to 915 MHz and 925 to 960 MHz.


# HP 8922S/M test set specifications

## Typical power measurement accuracy 880 to 915 MHz

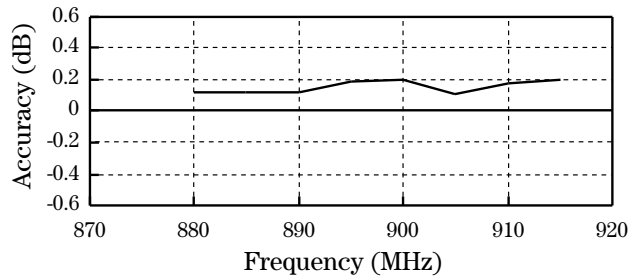

Measurement Power Level is +33 dBm

## Typical power measurement accuracy +41 to -5 dBm

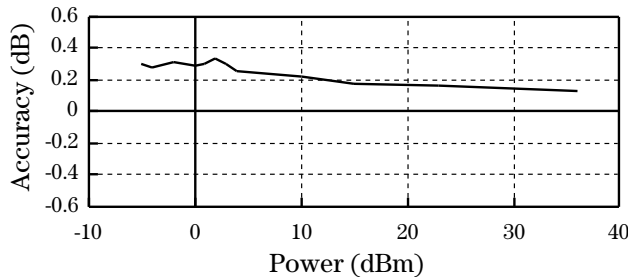

Measurement Frequency is 975 MHz

## Pulse on/off ratio measurement

(requires option 006)

'On' power is averaged over the useful part of the burst. 'Off' is averaged over a one bit interval centered at a user specified time. Non-hopped mode only.

**Input frequency setting range:**  $\pm 10$  kHz.

**Input level setting range:**  $\pm 3$  dB.

**Timing accuracy:**  $\pm 1.7 \mu\text{s}$  ( $\pm 1.1 \mu\text{s}$  typical).

**Accuracy (on/off  $\geq 40$  dB, RF in/out only):**

Off power (dBm)	On/off ratio accuracy	
-30 to -1	$\pm 2.4$ dB	$\pm 1.1$ dB typically
-37 to -30	$\pm 2.9$ dB	$\pm 1.3$ dB typically
-41 to -37	$\pm 3.7$ dB	$\pm 1.7$ dB typically
-47 to -42	$\pm 4.2$ dB	$\pm 2.1$ dB typically

## Amplitude envelope measurement

After one timeslot, 577  $\mu\text{s}$ , from an isolated receiver hop trigger in the GSM frequency bands<sup>1</sup>.

**Measurement range**

**RF in/out:** -6 to +41 dBm.

**Aux RF in:** -36 to +20 dBm.

**Input frequency setting range:**  $\pm 10$  kHz.

## Inaccuracy due to noise (for overshoots 1 dB):

Relative level	Input level setting error		
	$\pm 1$ dB	$\pm 3$ dB	$\pm 3$ dB w/5 averages
0 dB	$< \pm 0.15$ dB peak	$< \pm 0.2$ dB peak	$< \pm 0.2$ dB peak
-6 dB	$< \pm 0.2$ dB	$< \pm 0.3$ dB	$< \pm 0.3$ dB
-30 dB	$< +3.0$ dB $-3.8$ dB	$< +4.2$ dB $-7.5$ dB	$< +2.2$ dB $-2.6$ dB

## Phase and frequency measurements

After one timeslot, 577  $\mu\text{s}$ , from an isolated receiver hop trigger in the GSM frequency bands<sup>1</sup>.

### Range

**RF in/out:** -6 to +41 dBm.


**Aux RF in:** -36 to +20 dBm.

**Input frequency setting range:**  $\pm 10$  kHz.

**Input level setting range:**  $\pm 3$  dB.

**RMS phase error accuracy:**  $\leq 1^\circ$  rms.

## RMS phase error uncertainty versus measured value

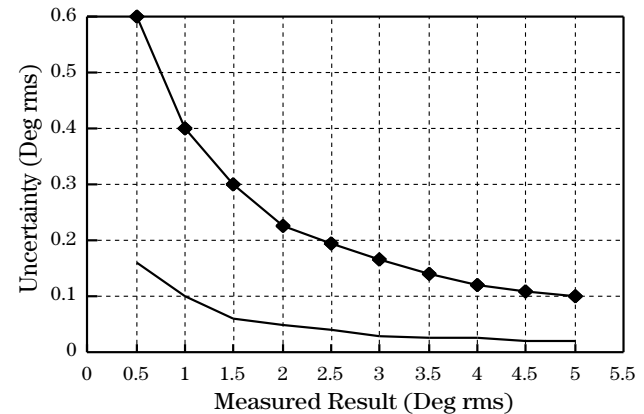

◆ Specified — Typical

**Peak phase error accuracy:**  $\leq 4^\circ$  peak.

**Frequency error accuracy:**  $\pm [0.02 \text{ ppm (18 Hz)} + \text{reference accuracy}]$ , for normal bursts.

*Typically  $\pm [0.03 \text{ ppm (27 Hz)} + \text{reference accuracy}]$  for RACH bursts.*

### Supplemental characteristics

After three timeslots, 1.73 ms, from an isolated receiver hop trigger in the GSM frequency bands<sup>1</sup>.

**RMS phase error accuracy:**  $\leq 0.5^\circ$  rms.

**Peak phase error accuracy:**  $\leq 2^\circ$  peak.

**Frequency error accuracy:**

$\pm [0.01 \text{ ppm (9 Hz)} + \text{reference accuracy}]$ , for normal bursts.

$\pm [0.02 \text{ ppm (18 Hz)} + \text{reference accuracy}]$ , for RACH bursts.

<sup>1</sup> GSM frequency bands are 880 to 915 MHz and 925 to 960 MHz.

## HP 8922S/M test set specifications

### 0.3 GMSK data recovery

(HP 8922M test set only)

After one timeslot, 577  $\mu$ s, from an isolated receiver hop trigger in the GSM frequency bands<sup>1</sup>.

#### Range

**RF in/out:** -6 to +41 dBm.

**Aux RF in:** -36 to +20 dBm.

**Input frequency setting error:**  $\pm 100$  Hz.

**Required input phase accuracy:**  $\leq 5^\circ$  rms,  $\leq 20^\circ$  peak.

**Modulation duty cycle:** 1 timeslot per frame.

**Outputs:** Data, clock and data valid.

**Data output clock:** Clocked at 1 MHz rate.

**Delay, data:**  $\leq 1$  frame (4.62 ms).

**Output level:** TTL.

### FM demodulation output

(HP 8922M test set only)

#### Range

**RF in/out:** -6 to +41 dBm.

**Aux RF in:** -36 to +20 dBm.

**Sensitivity:** 20  $\mu$ V/Hz  $\pm 5\%$  (into an open circuit).

**Input frequency setting range:**  $\pm 50$  kHz, with  $\leq 100$  kHz peak deviation

**Input level setting range:**  $\pm 3$  dB.

**Supplemental characteristics**

**3 dB bandwidth:** DC to 270 kHz.

**Output impedance:** 600 ohm.

**DC offset:**  $\leq 5$  mV.

### Pulse demodulation output

(HP 8922M test set only)

#### Range

**RF in/out:** -6 to +41 dBm.

**Aux RF in:** -36 to +20 dBm.

**Input frequency setting range:**  $\pm 50$  kHz.

**Input level setting range:**  $\pm 3$  dB.

**Rise time (10 to 90%):**  $\leq 2.5$   $\mu$ s.

**Fall time (90 to 10%):**  $\leq 2.5$   $\mu$ s.

**Supplemental characteristics**

**Output impedance:** 600 ohm, dc coupled.

**Output level:** 2 V<sub>peak</sub> into an open circuit.

### Output RF spectrum measurement

(requires option 006)

After one timeslot, 577  $\mu$ s, from an isolated receiver hop trigger in the GSM frequency bands<sup>1</sup>.

#### Range

**RF in/out:** -6 to +41 dBm.

**Aux RF in:** -36 to +20 dBm.

### Input levels for optimum dynamic range

**RF in/out:** +7, +17, +27, +37 dBm.

**Aux RF in:** -23, -13, -3, +7 dBm.

**Input frequency setting range:**  $\pm 10$  kHz.

**Input level setting range:**  $\pm 3$  dB.

#### Supplemental characteristics

**Log linearity:**  $\pm 0.4$  dB.

**Amplitude flatness:**  $\pm 1.0$  dB.

**Amplitude resolution:** 0.4 dB.

**Dynamic range (dB):** This describes the spectrum analyzer resolution bandwidth filter used when measuring output RF spectrum. The dynamic range of the measurement will be a combination of this filter response and the modulation spectrum of the incoming signal.

	Offset (kHz)					
	100	200	300	400	600	800 to 1800
Range (dB)	24	42	53	60	63	64

When using output RF spectrum due to the ramping measurement, the dynamic range is decreased by 12 dB (due to peak hold).

## Spectrum analyzer specifications (option 006)

**Frequency range:** 10 MHz to 1 GHz.

**Frequency span/resolution**

**Bandwidth (coupled):**

Span	Bandwidth
< 50 kHz	300 Hz
< 200 kHz	1 kHz
< 1.5 MHz	3 kHz
$\leq 4$ MHz	30 kHz

**Display:** Log, 10 dB/div.

**Display range:** 80 dB.

**Log linearity:**  $\pm 1.1$  dB.

<sup>1</sup> GSM frequency bands are 880 to 915 MHz and 925 to 960 MHz.



## HP 8922S/M test set specifications

### Reference level

**RF in/out:** +44 to -24 dBm.

**Aux RF in:** +23 to -55 dBm.

**Non-harmonic spurious responses:** -50 dBc max, for inputs  $\leq 30$  dBm.

**Residual responses:**  $< -70$  dBm (no input signal, 0 dB attenuation).

**Image rejection:**  $> 50$  dB.

### Supplemental characteristics

**Level accuracy:**  $\pm 2.5$  dB.

**Frequency overrange:** To 1015 MHz.

**Displayed average noise level:**  $< -116$  dBm (0 dB attenuation,  $< 50$  kHz spans).

### Frequency span/resolution

#### Bandwidth (coupled):

Span	Bandwidth
$\leq 50$ MHz	30 kHz

## Audio source specifications

### Frequency

**Range:** DC to 25 kHz.

**Accuracy:** 0.025% of setting.

### Supplemental characteristics

**Minimum resolution:** 0.1 Hz.

### Output level

**Range:** 0.1 mV to 4 V<sub>rms</sub>.

**Maximum output current:** 20 mA peak.

**Output impedance:**  $< 1$  ohm.

**Accuracy:**  $\pm$  (2% of setting + resolution).

**Residual distortion (THD+ noise, amplitude  $> 200$  mV<sub>rms</sub>):** 0.1%, 20 Hz to 25 kHz in 80 kHz BW.

### Supplemental characteristics

**Minimum resolution:**

Level  $\leq 0.01$  V: 50  $\mu$ V.

Level  $\leq 0.1$  V: 0.5 mV.

Level  $\leq 1$  V: 5 mV.

Level  $> 1$  V: 50 mV.

**DC coupled offset:**  $< 50$  mV.

## Audio analyzer specifications

### Frequency measurement

**Range:** 20 Hz to 400 kHz.

**Accuracy:**  $\pm(0.02\% + 1 \text{ count} + \text{reference accuracy})$ .

**External input:** 20 mV<sub>rms</sub> to 30 V<sub>rms</sub>.

### Supplemental characteristics

**Minimum resolution:**

$f < 10$  kHz: 0.01 Hz.

$f < 100$  kHz: 0.1 Hz.

$f \geq 100$  kHz: 1 Hz.

### AC voltage measurement

**Voltage range:** 0 V to 30 V<sub>rms</sub>.

**Accuracy (20 Hz to 15 kHz), input  $> 1$  mV<sub>rms</sub>:**  $\pm 3\%$  of reading.

**Residual noise+ THD (15 kHz BW):** 175  $\mu$ V.

### Supplemental characteristics

**3 dB bandwidth:** 2 Hz to 100 kHz.

**Input impedance:** 1 Mohm, 145 pF at audio in.

**Minimum resolution:**

4 digits for inputs  $\geq 100$  mV.

3 digits for inputs  $< 100$  mV.

### DC voltage measurement

**Voltage range:** 100 mV to 42 V.

**Accuracy:**  $\pm$  (1.0% of reading + DC Offset).

**DC offset:**  $\pm 45$  mV.

### Supplemental characteristics

**Minimum resolution:** 1.0 mV.

### Distortion measurement

**Fundamental frequency:** 1 kHz  $\pm 5$  Hz.

**Input level range:** 30 mV<sub>rms</sub> to 30 V<sub>rms</sub>.

**Display range:** 0.1% to 100%.

**Accuracy:**  $\pm 1$  dB (0.5 to 100% distortion).

**Residual THD+ noise (15 kHz BW):** The greater of -60 dB or +175  $\mu$ V.

### Supplemental characteristics

**Minimum resolution:** 0.01% distortion.

### Audio filters

There are seven filters used in the HP 8922 test set.

50 Hz HPF, 300 Hz HPF, 300 Hz LPF, 3 kHz LPF,

15 kHz LPF, 750  $\mu$ s de-emphasis, 1 kHz notch.

# HP 8922S/M test set specifications

---

## Audio detectors

The audio detectors available in the HP 8922 are:  
Pk+, pk−, pk + hold, pk − hold, pk  $\pm$ /2, pk  $\pm$ /2 hold,  
pk  $\pm$  max, pk  $\pm$  max hold, RMS.

## Oscilloscope specifications

**Frequency range (3 dB):** 2 Hz to 50 kHz.  
**Scale/division:** 10 mV to 10 V in 1, 2, 5 and 10 steps.  
**Amplitude accuracy (20 Hz to 10 kHz):**  $\pm 1.5\%$  of reading  $\pm 0.1$  division.  
**Time/division:** 10  $\mu$ s to 100 ms in 1, 2, 5 and 10 steps.  
**External trigger level:** TTL.  
**Maximum voltage**  
**Scope in:** 5 V peak.  
**Audio in:** 30 V<sub>rms</sub>.  
**Supplemental characteristics**  
**3 dB bandwidth:** Typically > 100 kHz.  
**Internal DC offset:**  $\leq 0.1$  division for  $\geq 50$   $\mu$ V/div sensitivity.

## Remote programming

**HP-IB:** Hewlett-Packard's implementation of IEEE Standard 488.2.  
**Functions implemented:** SH1, AH1, T6, L4, SR1, RL1, LE0, TE0, PP0, DC1, DT1, C4, C11, E2.  
**RS-232:** 3 wire RJ-11 connector used for serial data in and out.  
**Baud rates:** 1200, 2400, 4800, 960, and 19200 selectable.

## Printer support

**RS-232:** 3 wire RJ-11 connector used for serial data in and out.  
**Centronics parallel interface.**

## General specifications

**Size:** 177 H  $\times$  426 W  $\times$  574 D mm (7  $\times$  16.75  $\times$  23 inch).  
**Weight:** 32 kg, 70 lbs.  
**Operating temperature:** 0° to +55°C.  
**Storage temperature:** −40° to +70°C.  
**Power:** 100, 120, 220, 240 Vac, 48 to 440 Hz,  $\pm 10\%$  of line voltage, maximum 450 VA.  
**EMI:** Meets the requirements of the European, EMC directive 89/336/EEC.  
**Safety:** Certified to IEC 348:1978 and CSA-22.2, No. 231.  
**Video output:** The video out connector on the rear panel outputs a 15 kHz PAL CVBS underscanning compatible signal.

## Supplemental characteristics

**Leakage:** At RF generator output levels < −40 dBm, typical leakage is < 1  $\mu$ V induced in a resonant dipole antenna one inch away from any surface except the rear panel.

## Reference specifications

The accuracy needs for testing GSM radios require the unit to be operated with the high stability reference (option 001) or an external high stability reference.

**Accuracy (after warm up):**  $\pm$  [(Time since calibration  $\times$  aging rate) + temperature effects + accuracy of calibration].

### External reference input

**Frequency:** 13, 10, 5, 2 or 1 MHz,  $\pm 30$  ppm.

**Level:** 0 to +10 dBm.

### Supplemental characteristics

**Nominal impedance:** 50 ohm.

**10 MHz out (rear panel BNC)**

**Level:** > +8.0 dBm nominal.

**Impedance:** 50 ohm nominal.

**13 MHz out (rear panel BNC)**

**Level:** > +8.0 dBm nominal.

**Impedance:** 50 ohm nominal.

## Fixed reference mode

**Aging:** < 2 ppm/year.

**Temperature stability:**  $\pm 1$  ppm (0° to 55°C).

**Warm-up time:** < 30 minutes,  $\pm 2$  ppm of final frequency.

## Tunable reference mode

Allows offsetting the internal reference by a selected amount relative to the high stability reference (option 001) or an external reference.

**Required external reference accuracy:**  $\pm 0.5$  ppm.

**Tune range:**  $\pm 30$  ppm.

**Reference accuracy:**  $\pm 1$  ppm + accuracy of external reference or high stability (option 001).

**Temperature stability:**  $\leq 4$  ppm, for selected offsets of up to  $\pm 30$  ppm.

## Product options

---

### High stability timebase (option 001)

Option 001 adds a high stability timebase with the following specifications.

**Aging:**  $< 5 \times 10^{-4}$  ppm/day after 24 hour warm-up.  
 $< 0.1$  ppm/year for continuous operation.

**Temperature stability:**  $< 2.5 \times 10^{-3}$  ppm/°C (0° to +55°C).

**Warm-up time:** Within  $5 \times 10^{-4}$  ppm of final value 10 minutes after turn on, at 25°C.

#### **Supplemental characteristics**

**Opt 001 ref out (rear panel BNC to be connected to ref in).**

**Frequency:** 10 MHz nominally.

**Level:** +7.5 dBm nominally.

### Transit protection (option 002)

Option 002 adds accessories which protect the HP 8922S/M test set during handling and transport. This option adds a rugged front panel cover, extended rear feet and accessory pouch. The snap-on front cover protects the CRT and front panel from impact damage. The extended rear feet allow the unit to stand vertically with cables attached to the rear panel.

### Spectrum analyzer (option 006)

Option 006 adds a 10 to 1000 MHz spectrum analyzer to the HP 8922S/M test set. This provides output RF spectrum (due to modulation or switching) and pulse on/off measurements as well as general purpose capabilities.

### Test SIM card (option 007)

Option 007 adds a credit-card size test SIM (subscriber identity module).

### Micro test SIM card (option 008)

Option 008 adds a micro-size test SIM (subscriber identity module).

### Protocol logging (special option H03)

Special option H03 provides software and a connecting cable that enables GSM layer 2 and 3 messages to be logged to an ASCII file. The software runs on an MS-DOS® compatible PC.

### Protocol monitoring (option 003)

Option 003 provides an interface for connecting the HP 8922M test set to the HP 37900D protocol analyzer. The HP 37900D protocol analyzer may be used to continuously monitor the protocol link in real time between the mobile and HP 8922 base station simulator.

### HP 83212C GSM/DCS1800/PCS1900 MS test software (option 012)

Option 012 includes a copy of the HP 83212C GSM/DCS1800/PCS1900 MS test software with the HP 8922S/M test set. This software runs on the HP 8922S/M I-BASIC controller to provide automatic testing of mobiles. For DCS1800/PCS1900 testing, the HP 83220A/E DCS/PCS test set is also needed.

### Associated equipment

**HP 83210A service kit:** Includes extender boards, cables and service manual (08922-90108).

**HP 85700A:** 32 kbyte static RAM memory card.

**HP 85702A:** 128 kbyte static RAM memory card.

**HP 85704A:** 256 kbyte static RAM memory card.

**HP 85705A:** 512 kbyte static RAM memory card.

**HP 85701A:** 128 kbyte OTP ROM memory card.

**HP 85703A:** 256 kbyte OTP ROM memory card.

**08922-61062:** High stability reference (option 001) retrofit kit.

**08922-61070:** Transit protection (option 002) retrofit kit.

**08922-61845:** Spectrum analyzer (option 006) retrofit kit.

**9211-2661:** Transit case for the HP 83220A/E test set.

**9211-2662:** Transit case for the HP 8922S/M test set.

**HP 8657A/B:** Synthesized signal generator

**(Option 022):** 0.3 GMSK modulator.

**HP 11759C:** RF channel simulator.

**HP 8590E-Series:** Spectrum analyzers.

**HP 85715B:** GSM900 transmitter measurements personality.

**HP 85722B:** DCS1800 transmitter measurements personality.

### Recommended HP accessories

**HP 10438A:** Miniature oscilloscope probe (high impedance/ 40 pF 1:1 probe).

**HP 54006A:** 6 GHz resistive divider probe kit.

**HP 34118B:** Test lead kit.

**1250-1263:** BNC (male) to single banana plug.

**08920-61060:** Antenna.

### HP systems engineering assistance

Extra assistance from Hewlett-Packard in the form of system installation, productivity assistance, programmer or user training, or solution consulting are available. Call Hewlett-Packard for a quote.

## HP 83220A/E DCS/PCS test set specifications

The HP 83220A/E test set extends the HP 8922S/M test set to test DCS1800 and PCS1900 mobiles. Specifications are identical to the HP 8922S/M test set with the following exceptions:

### RF generator specifications

#### Frequency

**Range:** 1805 to 1990 MHz.  
1710 to 1785 MHz (HP 83220A test set only).

#### Output

##### RF in/out connector

**Level range:** -19 to -127 dBm.  
**Level accuracy:**  $\pm 1.0$  dB, levels  $\geq -127$  dBm.  
 *$\pm 1.0$  dB, typically for levels  $\geq -127$  dBm while hopping.*  
**Reverse power:** 2 W continuous.  
**SWR:**  $< 1.5:1$ .

##### Aux RF output connector (HP 83220A test set only)

**Level range:** +5 to -127 dBm.  
**Level resolution:** 0.1 dB.  
**Level accuracy:**  $\pm 1.0$  dB, levels  $\geq -127$  dBm.  
 *$\pm 1.0$  dB, typically for levels  $\geq -127$  dBm while hopping.*  
**Reverse power:** 200 milliwatts.  
**SWR:** 2.0:1.

### 0.3 GMSK modulation

**Frequency error:**  $\pm (0.01 \text{ ppm (22 Hz)} + \text{reference accuracy})$ , for normal bursts.  
*Typically  $\pm (0.02 \text{ ppm (32 Hz)} + \text{reference accuracy})$ , for RACHs.*

##### Supplemental characteristics

**Frequency error:**  $\pm (0.005 \text{ ppm (9 Hz)} + \text{reference accuracy})$ , for normal bursts.  
 *$\pm (0.01 \text{ ppm (18 Hz)} + \text{reference accuracy})$ , for RACH bursts.*

### AM for level control (HP 8922M test set only)

For output levels  $\leq -25$  dBm at RF in/out.  
**Rise/fall time (10 to 90%):**  $< 20 \mu\text{s}$ .

### RF analyzer specifications

#### Frequency

**Range:** 1710 to 1990 MHz.

#### CW RF frequency measurement

**Range:** 1710 to 1990 MHz.

##### Level Range

**RF in/out:** -13 to +32 dBm.  
**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

#### CW RF power measurement (RF in/out only)

**Range:** -5 to +32 dBm.

**Accuracy:** ( $\geq 0$  dBm, 1710 to 1880 MHz)  $\pm 0.5$  dB  $\pm$  noise effects (0.015 mW).

##### Supplemental characteristics

**Accuracy (-5 to 0 dBm, 1880 to 1990 MHz):**  $\pm 0.5$  dB  $\pm$  noise effects (0.015 mW).  
**Accuracy (-5 to +32 dBm, 1710 to 1990 MHz):** See graph.  
**Minimum resolution ( $> 0$  dBm):** 0.01 dB.

#### Peak transmitter carrier power measurement (RF in/out only)


**Range:** -5 to +32 dBm.

**Accuracy:** ( $\geq 0$  dBm, 1710 to 1880 MHz)  $\pm 0.6$  dB  $\pm$  noise effects (0.015 mW).

##### Supplemental characteristics


**Accuracy (-5 to 0 dBm, 1880 to 1990 MHz):**  $\pm 0.6$  dB  $\pm$  noise effects (0.015 mW).  
**Accuracy (-5 to +32 dBm, 1710 to 1990 MHz):** See graph.  
**Minimum resolution ( $\geq 0$  dBm):** 0.2 dB.

#### Power measurement accuracy 1710 to 1990 MHz

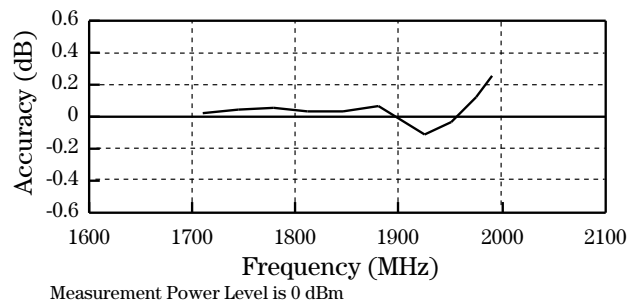


## HP 83220A/E DCS/PCS test set specifications

### Power measurement accuracy +32 to -5 dBm

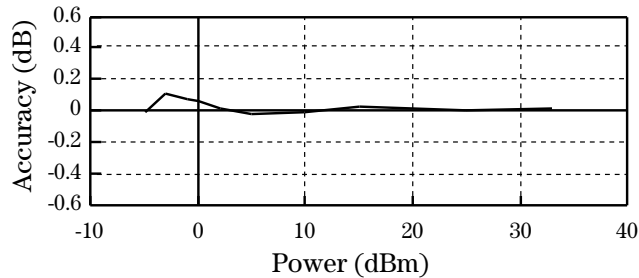

### RF generator level accuracy 1710 to 1990 MHz

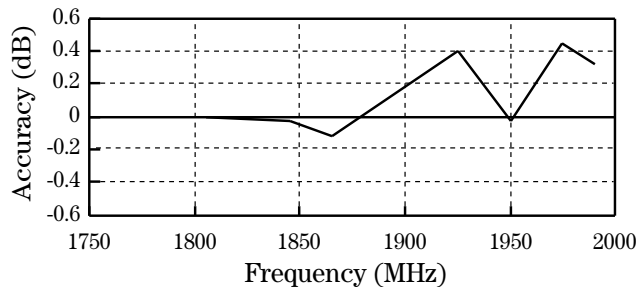

### Pulse on/off ratio measurement

Off power (dBm)	On/off ratio accuracy
-48 to -19	$\pm 2.4$ dB ( $\pm 1.1$ dB typically)
-55 to -48	$\pm 2.9$ dB ( $\pm 1.3$ dB typically)

### Amplitude envelope measurement

#### Measurement range

**RF in/out:** -13 to +32 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

### Phase and frequency measurement

#### Measurement range

**RF in/out:** -13 to +32 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

**Frequency error accuracy:**  $\pm (0.01 \text{ ppm (22 Hz)} + \text{reference accuracy})$ , for normal bursts.

*Typically  $\pm (0.02 \text{ ppm (32 Hz)} + \text{reference accuracy})$ , for RACHs.*

#### Supplemental characteristics

**Frequency error accuracy:**  $\pm (0.005 \text{ ppm (9 Hz)} + \text{reference accuracy})$ , for normal bursts.

$\pm (0.01 \text{ ppm (18 Hz)} + \text{reference accuracy})$ , for RACH bursts.

### 0.3 GMSK data recovery

#### Range

**RF in/out:** -13 to +32 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

### FM demodulation output

(HP 8922M test set only)

#### Range

**RF in/out:** -13 to +32 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

### Pulse demodulation output

(HP 8922M test set only)

#### Range

**RF in/out:** -13 to +32 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

### Output RF spectrum measurement

#### Range

**RF in/out:** -13 to +32 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

#### Input levels for optimum dynamic range

**RF In/Out:** -3, +2, +7, +12, +17, +22, +27, +32 dBm.

**Aux RF in:** -13, -8, -3, +2, +7, +12, +17, +22 dBm.

## Spectrum analyzer specifications

**Frequency range:** 1710 to 1990 MHz.

#### Reference level range

**RF in/out:** +35 to -45 dBm.

**Aux/RF in:** -23 to +20 dBm (HP 83220A test set only).

## General specifications

#### Size

**HP 83220A/E:** 133 H  $\times$  426 W  $\times$  574 D mm

(5.25  $\times$  16.75  $\times$  23 inch).

**HP 83220A/E + HP 8922:** 310 H  $\times$  426 W  $\times$  574 D mm

(12.25  $\times$  16.75  $\times$  23 inch).

#### Weight

**HP 83220A/E:** 16.3 kg, 36 lbs.

**HP 83220A/E + HP 8922S/M:** 48.3 kg, 106 lbs.

**Safety:** Meets IEC 348 and CSA 556B.

**Power:** 100, 120, 220, 240 Vac, 48 to 440 Hz,  $\pm 12\%$  of line voltage, approximately 200 VA (HP 83220A/E test set) or 640 VA (HP 83220A/E + HP 8922 test sets).

## Reference specifications

#### External reference input

#### Supplemental characteristics

**10 MHz out (rear panel BNC)**

**Level:**  $> +9.0$  dBm nominal.

**13 MHz out (rear panel BNC)**

**Level:**  $> +9.0$  dBm nominal.

## Ordering information

---

### HP 8922S GSM MS service test set

**Option 001:** High stability timebase.  
**Option 002:** Transit protection (provides front panel cover, and extended rear feet).  
**Option 006:** Spectrum analyzer.  
**Option 007:** Test SIM card.  
**Option 008:** Micro test SIM card.  
**Option 012:** Mobile station test software.  
**Option 0B1:** Provides a total of two sets of user's guides (08922-90144), service manuals (08922-90138) and programmers reference guide (08922-90147).  
**Option 0B3:** Adds service manual (08922-90138).  
**Option AX4:** Rack mount flange kit (5062-4072).

### HP 8922M GSM MS test set

**Option 001:** High stability timebase.  
**Option 002:** Transit protection (provides front panel cover, and extended rear feet).  
**Option 006:** Spectrum analyzer.  
**Option 007:** Test SIM card.  
**Option 008:** Micro test SIM card.  
**Option 012:** Mobile station test software.  
**Option 0B1:** Provides a total of two sets of user's guides (08922-90144), service manuals (08922-90108) and programmers reference guide (08922-90147).  
**Option 0B3:** Adds service manual (08922-90138).  
**Option AX4:** Rack mount flange kit (5062-4072).

### HP 83220A/E DCS1800 MS test set

**Option 022:** Bundle discount when ordered with HP 8922S/M test set.  
**Option 0B1:** Provides one additional user's guide: Part number 83220-90015 (HP 83220E test set), Part number 83220-90016 (HP 83220A test set).  
**Option AX4:** Rack mount flange kit (5062-4071).

### Supported printers and printer accessories

**HP DeskJet 500, 500C, 550C and 560C.**  
HP-IB, RS-232 and Centronics\* interfaces are supported.

\*Operation with Centronics printers requires the following accessories:

**ITEL-45CHVE:** MicroPrint HP-IB/Centronics bus converter.

**F1011A:** AC/DC adapter.

**C2912B:** 3m centronics cable.

**10833D:** 0.5m HP-IB cable.

**HP 8922S/M test set (Special option K06).**  
Serial printer connector and cable (RJ11 to D-type RS-232).

For more information on GSM test solutions from Hewlett-Packard, see the HP 8922S/M test set photocards (p/n 5964-6587E and 5964-6585E), HP 83212B test set product overview (p/n 5962-0196E) and the HP 8590E-Series technical data sheet (p/n 5091-9025E).

## Differences between the HP 8922S/M test sets and HP 8922F/H test sets

### HP 8922F/H to HP 8922S/M test sets upgrades

Keeping in line with our policy to offer continual enhancements for our instruments, customers who already have an HP 8922F or HP 8922H may upgrade them to the functionality of the HP 8922S or HP 8922M respectively. The electronic attenuator is not included in the upgrade.

The upgrades are in the form of retrofit kits which must be installed at an HP service center.

The upgrades are structured as options on an HP 8922U product. The HP 8922U does not exist as a product in its own right, only the options may be ordered.

### Ordering information

**HP 8922U option 101:** Upgrade HP 8922H test set to HP 8922M test set excluding electronic attenuator. For HP 8922G option R10, HP 8922G option R72, HP 8922H (all options).

**HP 8922U option 102:** Upgrade HP 8922F test set to HP 8922S test set excluding electronic attenuator. For HP 8922E option R12 HP 8922E option R71, HP 8922E option R73 and HP 8922F (all options).

### HP 8922S and HP 8922F test set differences

Feature	HP 8922S test set	HP 8922F test set
Measurement speed	Approx 10% increase in throughput	n/a
Multi-burst measurement capability	Yes	No
GSM phase II power levels	Yes	No
E-GSM frequency bands	Yes	No
Electronic attenuator	Yes	No
SMS cell broadcast	Yes	No
Peak carrier power meter range	-5 to +41 dBm	+4 to +41 dBm
RF generator power level range	-14 to -127 dBm	-13 to -127 dBm
Burst-by-burst BER measurement	Yes	No
Screen freeze facility	Yes	No
IMSI attach/detach function	Yes	No

### HP 8922M and HP 8922H test set differences

Feature	HP 8922M test set	HP 8922H test set
Measurement speed	10 to 20% increase in throughput	n/a
Multi-burst measurement capability	Yes	No
GSM phase II power levels	Yes	Yes with FW > B.06.00
E-GSM frequency bands	Yes	No
Electronic attenuator	Yes	No
SMS cell broadcast	Yes	Yes with FW > B.06.00
Peak carrier power meter range	-5 to +41 dBm	+4 to +41 dBm
RF generator power level range	-14 to -127 dBm	-13 to -127 dBm
Burst-by-burst BER measurement	Yes	No
Screen freeze facility	Yes	No
Flash firmware upgrades by HP-IB	Yes	No
IMSI attach/detach function	Yes	Yes with FW > B.06.00

### General comments

The HP 8922S/M are software compatible with the HP 8922F/H test set. There will still be an HP 8922G compatibility mode for backwards compatibility with existing test software.



For more information on Hewlett-Packard Test & Measurement products, applications or services please call your local Hewlett-Packard sales offices. A current listing is available via Web through AccessHP at <http://www.hp.com>. If you do not have access to the internet please contact one of the HP centers listed below and they will direct you to your nearest HP representative.

**United States:**

Hewlett-Packard Company  
Test and Measurement Organization  
5301 Stevens Creek Blvd.  
Bldg. 51L-SC  
Santa Clara, CA 95052-8059  
1 800 452 4844

**Canada:**

Hewlett-Packard Canada Ltd.  
5150 Spectrum Way  
Mississauga, Ontario  
L4W 5G1  
(905) 206 4725

**Europe:**

Hewlett-Packard  
European Marketing Centre  
P. O. Box 999  
1180 AZ Amstelveen  
The Netherlands

**Japan:**

Hewlett-Packard Japan Ltd.  
Measurement Assistance Center  
9-1, Takakura-Cho, Hachioji-Shi  
Tokyo 192, Japan  
Tel: (81-426) 56-7832  
Fax: (81-426) 56-7840

**Latin America:**

Hewlett-Packard  
Latin American Region Headquarters  
5200 Blue Lagoon Drive  
9th Floor  
Miami, Florida 33126  
USA  
(305) 267 4245/4220

**Australia/New Zealand:**

Hewlett-Packard Australia Ltd.  
31-41 Joseph Street  
Blackburn, Victoria 3130  
Australia  
1 800 629 485

**Asia Pacific:**

Hewlett-Packard Asia Pacific Ltd.  
17-21/F Shell Tower, Times Square  
1 Matheson Street, Causeway Bay  
Hong Kong  
Fax: (852) 2506 9285

© Hewlett-Packard Co. 1996

Printed in USA  
Data subject to change  
5964-6586E (7/96)