

5.5 Digit Multimeter, B-Size HP E1326B

Technical Specifications

- DCV, ACV, 2- & 4-Wire Ohm, Temperature
- 5.5-digit low-noise integrating A/D
- 13 kHz High-speed sampling A/D
- Balanced differential isolated inputs
- Software calibration

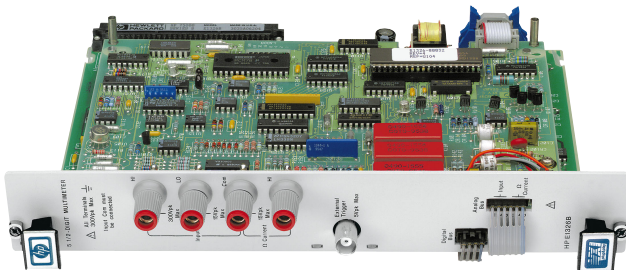

Description

The HP E1326B autoranging 5.5-digit multimeter is a **B-size, 2-slot, register-based VXI module**. It is identical in electrical design to the HP E1411B, differing only in size. The HP E1326B can be used in the HP E1302A or the HP E1300A/01A mainframes. Using the Internal Installation Kit (HP E1326-80004) or Option 009 when ordering the E1300A/01A, the HP E1326B can be mounted internally in the HP E1300A/01A mainframes (saving two module slots). This instrument is especially well suited for data acquisition and computer-aided test applications.

This module can be used as an integrating A/D to make 5.5-digit, low-noise measurements, or switch to the sampling A/D to make 14-bit readings at rates up to 13 kHz. When combined with any HP VXI relay or FET multiplexer, you can create a multichannel scanning multimeter. By sending just one SCPI command to the HP E1300A/01A mainframe built-in command module or the HP E1306A command module, you can program the multimeter and the channels of your multiplexers at one time. The HP E1326B provides flexible triggering with built-in timer pacer.

Product functions for the HP E1326B include DCV, ACV Offset-compensated Ohm, Thermocouples, Thermistors, and RTDs. Refer to the HP Website directory of addresses (URLs) for instrument driver availability and downloading instructions.

Specifications

Max. reading rate: 13 K

Reading rate:

Auto zero off, fixed range, default trigger delay, offset comp off,
Sample Source "TIMER" for rates >15 readings/s.

Typical Reading Rates (rdgs/s)

	Aperture						
	320 ms	267 ms	20 ms	16.7 ms	2.5 ms	100 μ s	10 μ s
DC voltage	3	3.5	49	59	365	3125	13000
Four-wire resistance	3	3.5	49	59	365	3125	13000
AC voltage	1.3	1.4	1.9	1.9	1.9	1.9	1.9

Noise rejection (dB):

Noise Rejection Conditions: CMR measured with 1 k Ω in both HIGH and LOW leads with a 10% imbalance, LOW connected to COMMON at source, measured with respect to earth ground. NMR is for specified frequencies $\pm 0.1\%$

		320 ms	267 ms	20 ms	Aperture 16.7 ms	2.5 ms	100 μ s	10 μ s
DC voltage & resistance:								
DC	Common mode rejection	150 dB	150 dB	150 dB	150 dB	150 dB	150 dB	150 dB
50 Hz	Power line cycles (NPLCs)	16	—	1	—	—	—	—
	Normal mode (50 Hz) rejection	84 dB	0 dB	60 dB	0 dB	0 dB	0 dB	0 dB
60 Hz	Power line cycles (NPLCs)	—	16	—	1	—	—	—
	Normal mode (50 Hz) rejection	0 dB	84 dB	0 dB	60 dB	0 dB	0 dB	0 dB
400 Hz	Power line cycles (NPLCs)	128	—	8	—	1	—	—
	Normal mode (50 Hz) rejection	84 dB	0 dB	84 dB	0 dB	60 dB	0 dB	0 dB
AC voltage:								
Dc to 400 Hz	Common mode rejection	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB	110 dB

DC Voltage

Accuracy Conditions: Auto zero on, one hour warmup. Temperature within $\pm 5^\circ\text{C}$ of calibration temperature (module calibrated at 18-28 $^\circ\text{C}$).

Range	Input Resistance	Resolution vs Aperture (Ω) (Volts)		90-Day Accuracy vs Aperture $\pm$ (% of Reading + W)	
		20/16.7 ms	10 μ s	20/16.7 ms	10 μ s
125 mV	>100 M Ω	120 nV	7.6 μ V	0.023% + 5 μ V	0.115% + 60 μ V
1 V	>100 M Ω	1.0 μ V	61 μ V	0.013% + 15 μ V	0.1% + 200 μ V
8 V	>100 M Ω	7.6 μ V	488 μ V	0.01% + 50 μ V	0.1% + 1.5 mV
64 V	10 M Ω $\pm$ 5%	61 μ V	3.9 mV	0.015% + 1 mV	0.1% + 20 mV
300 V	10 M Ω $\pm$ 5%	488 μ V	31 mV	0.015% + 5 mV	0.1% + 80 mV

DC voltage: 300 V max.
Voltage accuracy (DC): 0.0145%

Four Wire Resistance

Accuracy Conditions: Auto zero on, one hour warmup. Temperature within $\pm 5^\circ\text{C}$ of calibration temperature (module calibrated at 18-28 $^\circ\text{C}$).

Range	Source Current	Maximum Open Circuit Voltage	Resolution vs Aperture (μ)		90-Day Accuracy vs Aperture $\pm$ (% of Reading W)	
			20/16.7 ms	10 μ s	20/16.7 ms	10 μ s
256 Ω	488 μ A	11.5 V	250 μ Ω	15 m Ω	0.035% + 10 m Ω	0.12% + 50 m Ω
2 k Ω	488 μ A	11.5 V	2 m Ω	125 m Ω	0.025% + 20 m Ω	0.1% + 200 m Ω
16 k Ω	61 μ A	11.5 V	15 m Ω	1 Ω	0.025% + 200 m Ω	0.1% + 2 Ω
131 k Ω	61 μ A	11.5 V	125 m Ω	8 Ω	0.025% + 1 Ω	0.1% + 16 Ω
1 M Ω	7.6 μ A	11.5 V	1 Ω	64 Ω	0.025% + 10 Ω	0.1% + 120 Ω

True RMS AC Voltage (AC coupled)

Crest Factor: 7 at 10% full scale; 1.5 at full scale. Accuracy Conditions: Sine wave inputs >10% of full scale. DC component <10% of AC component. Auto-zero on, 1 hour warmup. Temperature within $\pm 5^\circ\text{C}$ of calibration temperature (module calibrated at 18-28 $^\circ\text{C}$).

Range (RMS)	Input Impedance	Frequency	Resolution vs Aperture (Volts)		90-Day Accuracy vs Aperture $\pm$ (% of Reading + Volts)	
			320/267 ms	10 μs	320/267 ms	All other apertures
87.5 mV	>100 M Ω , <100 pF	20-50 Hz	30 nV	7.6 μV	2.175% + 200 μV	2.175% + 1 mV
		50 Hz-1 kHz			0.675% + 200 μV	0.675% + 200 μV
		1-5 kHz			0.675% + 200 μV	0.675% + 200 μV
		5-10 kHz			3.175% + 200 μV	3.175% + 200 μV
700 mV	>100 M Ω , <100 pF	20-50 Hz	0.24 μV	61 μV	2.125% + 1.5 mV	2.125% + 8 mV
		50 Hz-1 kHz			0.625% + 1.5 mV	0.625% + 1.5 mV
		1-5 kHz			0.625% + 1.5 mV	0.625% + 1.5 mV
		5-10 kHz			3.125% + 1.5 mV	3.125% + 1.5 mV
5.6 V	>100 M Ω , <100 pF	20-50 Hz	2.0 μV	488 μV	2.125% + 15 mV	2.125% + 80 mV
		50 Hz-1 kHz			0.625% + 15 mV	0.625% + 15 mV
		1-5 kHz			1.125% + 15 mV	1.125% + 15 mV
		5-10 kHz			10.125% + 15 mV	10.125% + 15 mV
44.8 V	10 M Ω $\pm$ 5%, <100 pF	20-50 Hz	15 μV	3.9 mV	2.125% + 100 mV	2.125% + 500 mV
		50 Hz-1 kHz			0.625% + 100 mV	0.625% + 100 mV
		1-5 kHz			1.125% + 100 mV	1.125% + 100 mV
		5-10 kHz			10.125% + 100 mV	10.125% + 100 mV
300 V	10 M Ω $\pm$ 5%, <100 pF	20-50 Hz	122 μV	31 mV	2.125% + 500 mV	2.125% + 2.5 V
		50 Hz-1 kHz			0.625% + 500 mV	0.625% + 500 mV
		1-5 kHz			1.125% + 500 mV	1.125% + 500 mV
		5-10 kHz			10.125% + 500 mV	10.125% + 500 mV

AC voltage: 300 V max.

Voltage accuracy (AC): 0.84%

Timing/Synchronization

Timer/pacer:

Timer range: 76 μs to 65.5 ms

Resolution: 2 μs

Programmable delay:

Delay range: 40 μs to 16 s

Resolution: 2 μs

External trigger:

Minimum pulse width: 100 ns

Maximum trigger rate: 5 kHz (Trigger Condition, negative edge; Fixed range, 10 μs aperture)

Typical Reading Storage

HP 75000 Mainframe	# of Readings
Series B with standard memory	50,000
Series B with 512 KB memory (HP E1300/1A Opt 11)	100,000
Series B with 1 MB memory (HP E1300/1A Opt 11)	200,000

Isolation 450 Vpk between any terminal and chassis.

DC Voltage Accuracy with Relay Multiplexers

Accuracy Conditions: Auto zero on, one hour warmup. Temperature within $\pm 5^\circ\text{C}$ of calibration temperature (module calibrated at 18-28 $^\circ\text{C}$).

Range	HP E1326B & E1345A / 47A		HP E1326B & E1346A	
	20/16.7 ms	10 μs	20/16.7 ms	10 μs
125 mV	0.023% + 9 μV	0.115% + 64 μV	0.023% + 55 μV	0.115% + 110 μV
1 V	0.013% + 19 μV	0.1% + 204 μV	0.013% + 65 μV	0.1% + 250 μV
8 V	0.01% + 54 μV	0.1% + 1.5 mV	0.01% + 100 μV	0.1% + 1.55 mV
64 V	0.015% + 1 mV	0.1% + 20 mV	0.015% + 1.05 mV	0.1% + 20 mV
300 V	0.015% + 5 mV	0.1% + 80 mV	0.015% + 5.05 mV	0.1% + 80 mV

True RMS AC Voltage (AC coupled) with Relay Multiplexers

1-5 kHz and 5-10 kHz frequencies (all apertures) when using Relay Multiplexers (HP E1343A, E1345A, E1346A, or E1347A). Add 0.2% to the AC Voltage specifications.

Strain Measurements with Strain Relay Multiplexers

With the HP E1355A, E1356A, E1357A, and E1358A, relay and FET strain multiplexer cards. All measurements are made using the MEAS command. Note: The HP E1300A/01A mainframes, HP E1306A command module and embedded controllers provide units conversion; if the E1326B is register programmed, your program must make the units conversion.

Vs = 5 V Power Supply / Gage Factor = 2

		18-20 °C		Temp. Coefficient	
		μe	% e	μe	% e
Relays	Quarter	20.8	.023	1.96	0.006
	Half	2.92	.023	0.23	0.006
	Full	0.834	.023	0.053	0.006
FETs	Quarter	26.3	.023	3.98	0.006
	Half	5.63	.023	1.24	0.006
	Full	2.19	.023	0.557	0.006

Vs = 1 V Power Supply / Gage Factor = 2

		18-20 °C		Temp. Coefficient	
		μe	% e	μe	% e
Relays	Quarter	25.8	0.023	1.96	0.006
	Half	5.39	0.023	0.23	0.006
	Full	2.07	0.023	0.053	0.006
FETs	Quarter	52.9	0.023	12.0	0.006
	Half	18.9	0.023	5.27	0.006
	Full	8.85	0.023	2.57	0.006

Vs = 0.1 V Power Supply / Gage Factor = 2

		18-20 °C		Temp. Coefficient	
		μe	% e	μe	% e
Relays	Quarter	81.3	0.023	1.96	0.006
	Half	33.2	0.023	0.23	0.006
	Full	16	0.023	0.053	0.006
FETs	Quarter	353	0.023	103	0.006
	Half	169	0.023	50.7	0.006
	Full	83.8	0.023	25.3	0.006

Four Wire Resistance with Relay Multiplexers

Accuracy Conditions: Auto zero on, one hour warmup, temperature within $\pm 5^\circ\text{C}$ of calibration temperature (module calibrated at 18-28 °C).

Note: With offset compensation on, accuracy is the same as for the voltmeter alone.

90-Day Accuracy vs Aperture $\pm$ (% of reading + Ω) HP E1326B & E1345A / 47A		
Range	20/16.7 ms	10 μs
256 Ω	0.035% + 18.2 m Ω	0.12% + 58.2 m Ω
2 k Ω	0.025% + 28.2 m Ω	0.1% + 208 m Ω
16 k Ω	0.025% + 266 m Ω	0.1% + 2.1 Ω
131 k Ω	0.025% + 1.1 Ω	0.1% + 16.1 Ω
1 M Ω	0.025% + 10.5 Ω	0.1% + 121 Ω

Note: Accuracy data includes all errors contributed by the multimeter, analog bus ribbon cables, multiplexer, and transducer linearizations (if applicable). The accuracies do not include transducer accuracy errors.

General

Functions

Idc:	—
Iac:	—
Frequency:	—
Period:	—
Temp.	T _{mr} T _{cr} RTD

VXI Characteristics

VXI device type:	Register-based
Data transfer bus:	
Size:	B
Slots:	2
Connectors:	P1
Shared memory:	Yes (available with HP E1406A/E1306A-E1301A/E13001A SCPI driver)
VXI busses:	n/a
C-size compatibility:	Yes

Instrument Drivers

See the HP Website (http://www.hp.com/go/inst_drivers) for driver availability and downloading.

Command module firmware:	ROM
Command module firmware rev:	A.01
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
HP VEE Drivers:	Yes
VXIplug&play Win Framework:	Yes
VXIplug&play Win95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No (not available at time of publication)

Module Current

	I _{PM}	I _{DM}
+5 V:	0.2	0.1
+12 V:	0.55	0.01
−12 V:	0	0
+24 V:	0	0
−24 V:	0	0
−5.2 V:	0	0
−2 V:	0	0

Cooling/Slot

Watts/slot:	4.20
ΔP mm H ₂ O:	0.07
Air Flow liter/s:	0.35

Temperature

The temperature accuracy graphs (below) include instrument and firmware linearization errors. The linearization algorithm used is based on the IPTS-68(78) standard transducer curves. Add your transducer accuracy to determine total measurement error.

Note: The HP E1300A/01A mainframes, HP E1406A command modules and HP Embedded VXI controllers provide units conversion; if the HP E1411B or E1326B is register-programmed, your program must make the necessary units conversion.










Ordering Information

Description

5 ½ Digit Multimeter; High Accuracy
Service manual
Mil std 45662A calibration w/ test data
Japan - Japanese localization
3 yr. retn. to HP to 1 yr. OnSite warr.
INTERNAL INSTALLATION
KIT-BINDING POST

Product No.

HP E1326B
HP E1326B 0B3
HP E1326B 1BP
HP E1326B ABJ
HP E1326B W01
HP E1326-80004
HP E1326-80005



Thermocouples

(HP E1326B Multimeter
and HP E1345A/E1347A/E1476A TC MUX):
16 ms aperture (1 PLC):

100 us aperture:




Thermistors

(HP E1326B Multimeter
and HP E1345A/E1347A/E1476A MUXs)

4-wire Ω :

16 ms aperture (1 PLC):

100 us aperture:





RTDs

(HP E1326B Multimeter
and HP E1345A/E1476A MUXs)

4-wire Ω :

16 ms aperture (1 PLC):

100 us aperture:

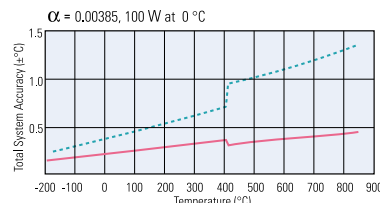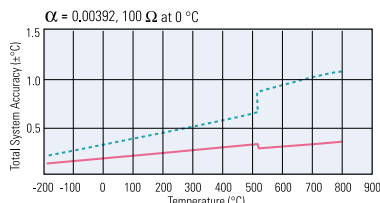

Data Subject to Change
Copyright © January 1997
Hewlett Packard Co.
HP Publication No.: 5965-5560E