

Agilent E3238 Signals Development System

Configuration Guide



The E3238 Signals Development System achieves great versatility through its many configurations. Its combination of tuners, ADCs, DSP modules, and RAM modules allow it to support different frequency ranges, applications, and packaging. Functionality is enhanced through broad support of third party components. Its embedded controllers support

HP-UX and Windows NT®, with both versions providing the same functionality and user interface. Optional software allows functionality to be added to the standard software, or program the DSP modules with custom algorithms.

The following examples are just a few of the possible combinations.



Windows NT is a U.S. registered trademark of Microsoft Corporation.



Agilent Technologies



Innovating the HP Way

Frequency	HF	VHF/UHF	µWave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

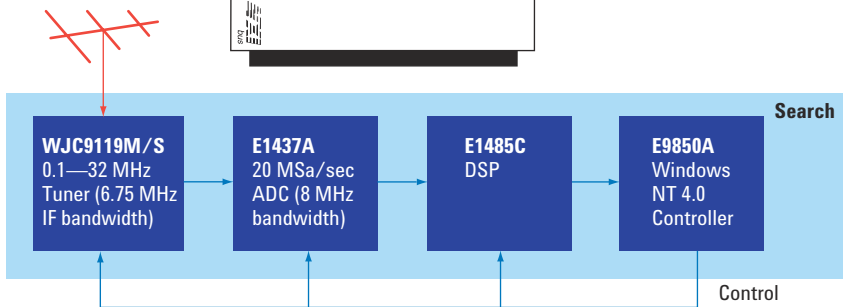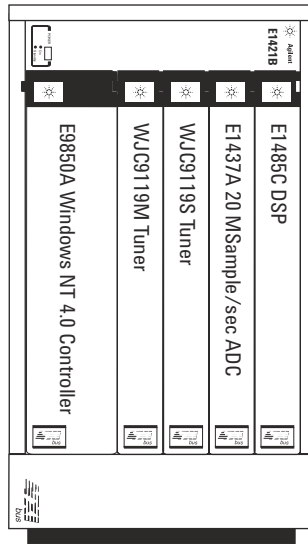



- 0.1–32 MHz frequency range
- 2.8 GHz/second sweep rate
- 6.75 MHz tuner IF bandwidth
- -110 dBfs ADC residual spurious responses

Frequency	HF	VHF/UHF	µWave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

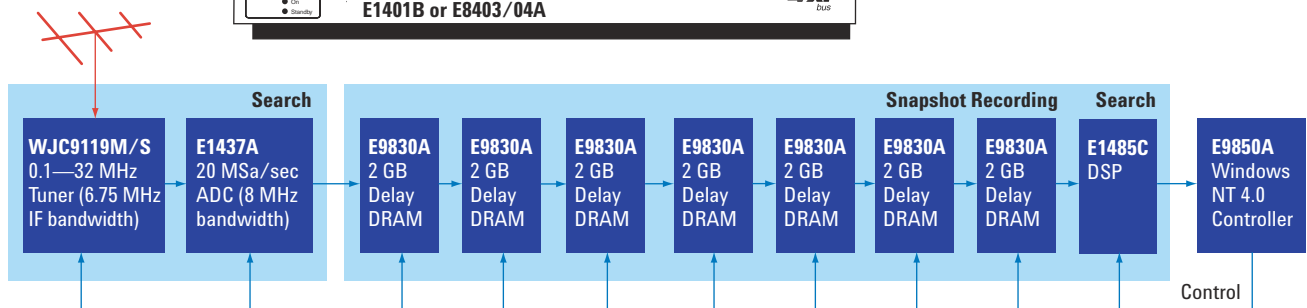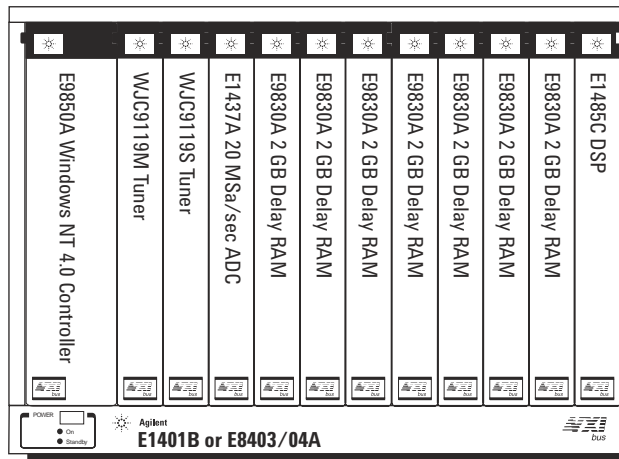



- 0.1–32 MHz frequency range
- 2.8 GHz/second sweep rate
- 6.75 MHz tuner IF bandwidth
- -110 dBfs ADC residual spurious responses
- 2–14 GB Delay/snapshot RAM

Frequency	HF	VHF/UHF	μ Wave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

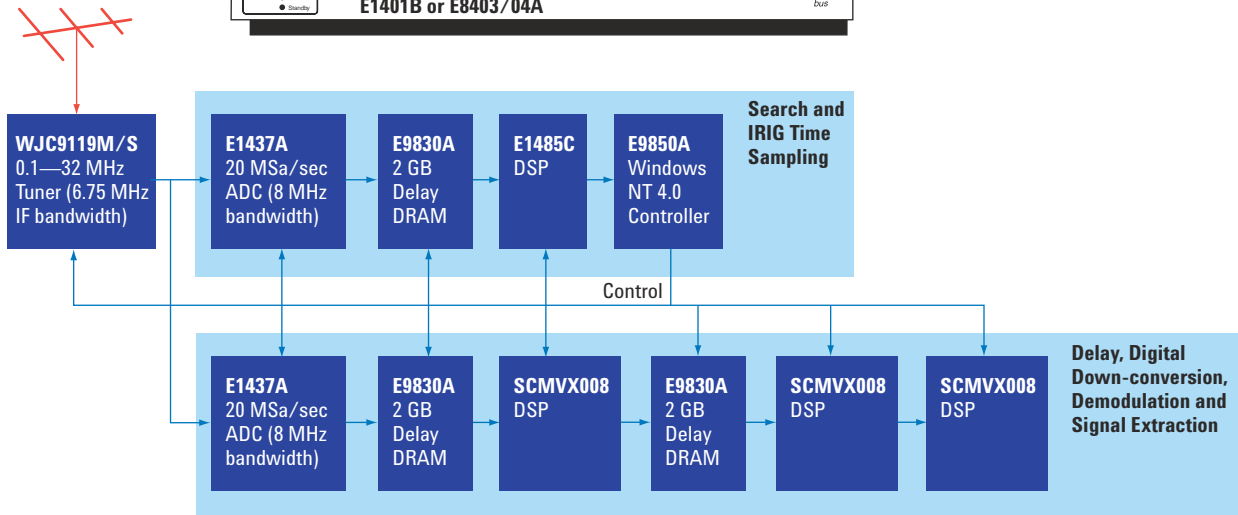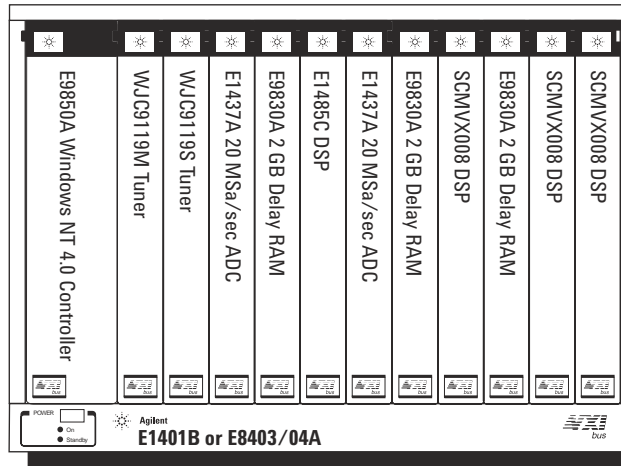



- 0.1-32 MHz frequency range
- 2.8 GHz/second sweep rate
- 6.75 MHz Tuner IF Bandwidth
- -110 dBfs ADC residual spurious responses
- Delay FIFOs to allow narrowband processors time to see the first bit of signal
- Dual SCM VX008 DSPs use digital down-converters and C40 DSP to demodulate and extract information from narrowband data

Frequency	HF	VHF/UHF	μWave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

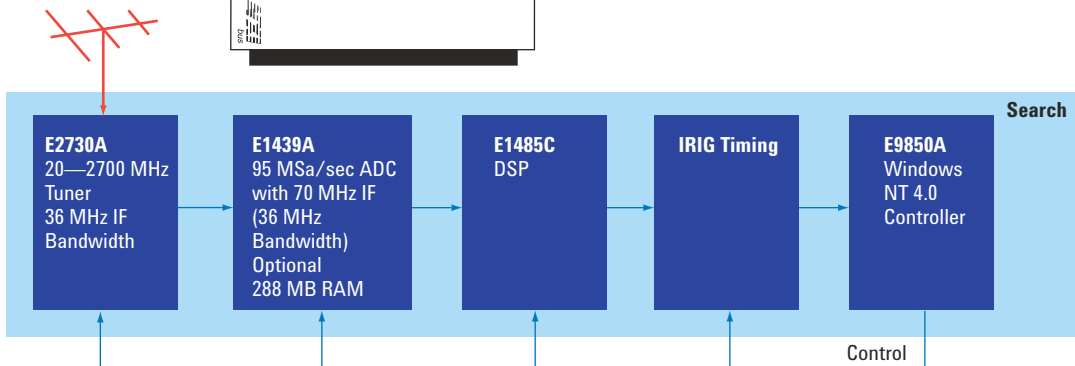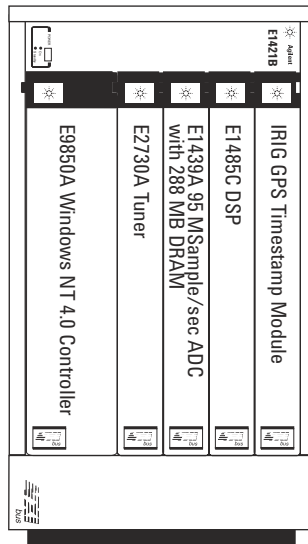



- 20–2700 MHz frequency range
- 7.2 GHz/second sweep rate
- 36 MHz IF bandwidth
- -90 dBfs ADC residual spurious responses
- 288 MB DRAM provides 2 second snapshot at full 36 MHz bandwidth
- Optional IRIG module for 1 ms timestamp accuracy

Frequency	HF	VHF/UHF	µWave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

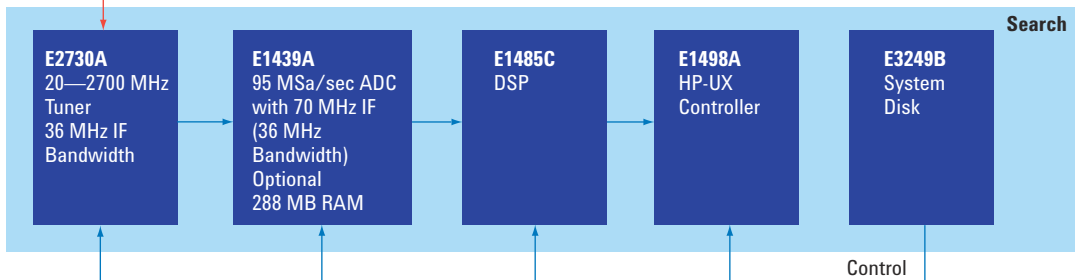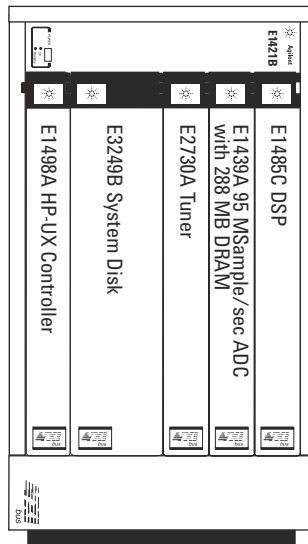



- 20–2700 MHz frequency range
- 7.2 GHz/second sweep rate
- 36 MHz IF bandwidth
- -90 dBfs ADC residual spurious responses
- 288 MB DRAM provides 2 second snapshot at full 36 MHz bandwidth

Frequency	HF	VHF/UHF	μ Wave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

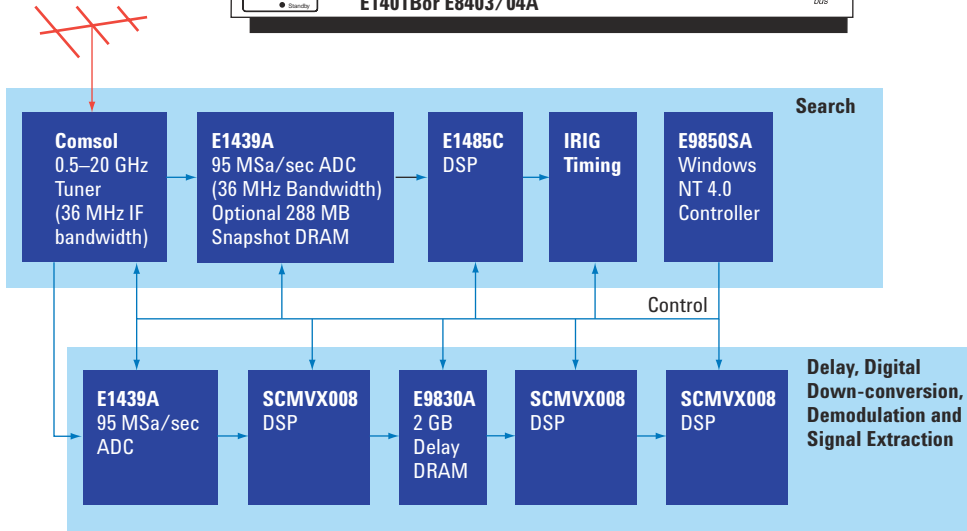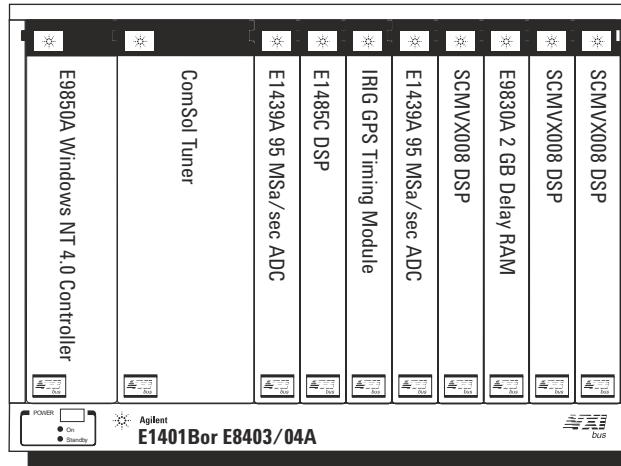

- 0.5–20 GHz frequency range
- 3.2 GHz/second sweep rate
- 36 MHz IF bandwidth
- -90 dBfs ADC residual spurious responses
- 288 MB DRAM provides 2 second snapshot at full 36 MHz bandwidth
- Dual SCMVX008 DSPs use digital down-converters and C40 DSP to demodulate and extract information from narrowband data

Frequency	HF	VHF/UHF	μWave
Mobility	Portable	Base-Station	
Application	Search	Recording	Search+Collection
Operating System	HP-UX	Windows NT	

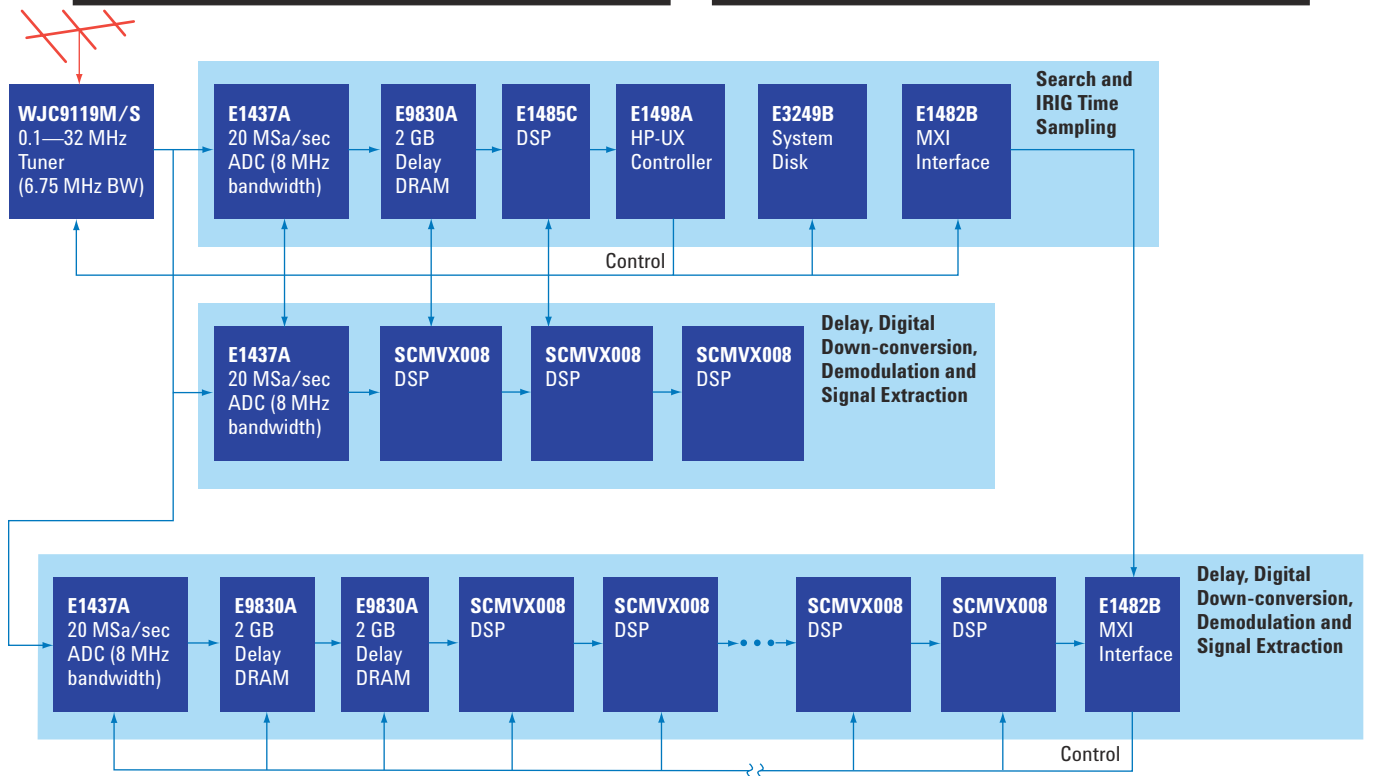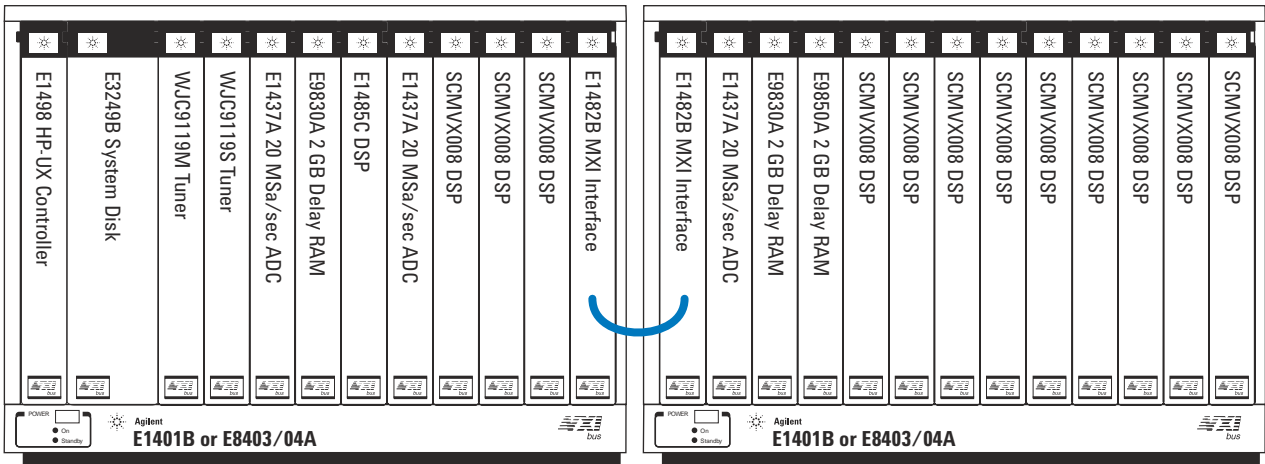

- 0.1–32 MHz frequency range
- 2.8 GHz/sec sweep rate
- 6.75 MHz tuner IF bandwidth
- -110 dBm residual spurious responses
- Delay FIFOs to allow narrowband processors time to see first bit of signal
- 96–192 narrowband channels, depending on how much DSP is required per channel

Software

35688C

E3238S Signals Development System Software
The 35688C software is the application software for the E3238 Signals Development System.

Option 100

Standard E3238 software on HP-UX
Option 100 provides the 35688C software for the E3238 system on HP-UX.

Option 101

Standard E3238 software on Windows NT
Option 101 provides the 35688C software for the E3238 on Windows NT.

Option ORU

Software update installation planning
Option ORU is a software subscription service that provides 35688C software updates when they occur. Customers can purchase the length of service in one month increments.

AS9

User Programming

Option AS9 allows users to extend the functionality of the E3238 and connect it to legacy systems. AS9 extensions are written in C, and are dynamically linked into the E3238 as shared libraries. Software can be developed in HP-UX or Windows NT. Added functionality integrates seamlessly into the E3238 user-interface.

Option ASM

Feature Studio

Option ASM is a graphical program for creating complex-shaped upper and lower limit lines. ASM generates C code that is used with option AS9 to implement limit lines to use as pre-filters in the E3238.

Option ASH

User Signal Processing

Option ASH is an integrated software development environment to create, test, and deploy new signal types. Using a Programming Wizard, you can easily generate a working signal framework, and then drop in your own custom signal algorithms. The resulting program runs on a multi-processor SCM VX008 DSP module, and is seamlessly integrated into the E3238 system. Using option ASH, you can develop your own sensitive signals quickly.

Optional Agilent hardware

VXI Mainframes

E1401B 13-slot VXI mainframe

E1421B 6-slot VXI mainframe

E8403A 13-slot VXI high-power mainframe with basic monitoring

E8404A 13-slot VXI high-power mainframe with enhanced monitoring

Peripherals

UIKIT User interface kit (mouse and keyboard)

EXTDVD External desktop DVD drive

EXTDAT External desktop DAT backup device

EXTHD External desktop 9 GB hard disk

E3249B (HP-UX only) 4.3 GB VXI system disk, with DAT drive

MANCD (HP-UX only) HP-UX manuals on CD-ROM

MON17 17 inch color monitor

MON19 19 inch color monitor

MON21 21 inch color monitor

MONRACK Universal monitor rack mount kit

Miscellaneous hardware

E1482B VXIbus extender (for multi-mainframe configurations)

Export of the product identified in this literature is subject to U.S. Export control laws. Export licenses are approved on a case-by-case basis and sale of any of these products is dependent on approval of the United States Government.

Compatible Tuners

Tuner	Frequency Range	E1430A	E1437A	E1438A	E1439A	Interface Type
HP89431A	2.0—2650 MHz	X	X	X ²		RS232
WJC9119L/R	0.5—32 MHz	X	X	X ²		VXI
WJC9119M/S	0.5—32 MHz	X	X	X ²		VXI
CS5040 ¹	500 —20000 MHz				X	VXI
E2730	20—2700 MHz				X	VXI

¹ Communications Solutions, Inc.

² Not recommended due to lower dynamic range

Compatible Handoff Receivers

Handoff Receiver	Frequency Range	Interface Type
WJ-8607 ¹	VHF/UHF	RS232
WJ-8611 ¹	VHF/UHF	RS232/GPIB
WJ-8615P ¹	VHF/UHF	GPIB
WJ-8629 ¹	VHF/UHF	VXI
WJ-8634 ¹	VHF/UHF	VXI
WJ-8711 ¹	HF	RS232/GPIB
WJ-8712 ¹	HF	RS232
WJ-8721 ¹	HF	VXI
Cubic VXI-3250 ²	HF	VXI
Cubic VXI-3550 ²	VHF/UHF	VXI
Cubic VXI-3570 ²	VHF/UHF	VXI
Cubic R-2411/U ²	MF/HF	GPIB
Cubic R-2412/U ²	VHF/UHF	GPIB
Icom IC-R8500 ³		RS232
Icom IC-R9000 ³		RS232
Rohde & Schwarz EK-895 ⁴	VLf/HF	RS232
Agilent 89441	HF/VHF/UHF	GPIB

¹ BAE Systems

² Cubic Communications, Inc.

³ Icom America, Inc.

⁴ Rohde & Schwarz

Compatible RF and μ Wave Switches

Switch	Frequency Range	Number of Switches	VXI Slots
E1472A (50 Ω)	RF	16:1	C-1
E1475A (75 Ω)	RF	16:1	C-1
E1368A (50 Ω)	μ Wave	4:1	C-1
E1369/E1370 (50 Ω)	μ Wave	user configurable	C-1

Compatible IRIG GPS Module

IRIG Module	Timestamp Accuracy
BC350VXI ¹	0.001 seconds

¹ Datum, Inc.

E9830A Data Rates and Quantities

E9830A Specifications	Max Bandwidth	Max Data Rate	Max Samples (2GB)	Max Samples (1GB)
16 bit ADC data (recommended for VHF/UHF/ μ Wave)	10.35 MHz	53 MB/sec	1,073,741,824	536,870,912
32 bit ADC data (recommended for HF)	5.17 MHz	53 MB/sec	536,870,912	268,435,456

Warranty

The Agilent Technologies VXI hardware in the E3238 system is covered by one-year or three-year return-to-Agilent Technologies parts and labor warranty, check the individual product number to determine which. The software is warranted for 90 days. Additional coverage may be purchased from Agilent. Contact your local Agilent representative.

Related Agilent Literature

3587 Signals Analysis System Brochure
literature number 5968-2076E

Agilent Communications Intelligence Solutions Overview
literature number 5988-0633EN

E3238 Signals Development System Option ASH Product Overview
literature number 5968-7077E

E3238 Signals Development System Product Overview
literature number 5968-2075E

E3238 Signals Development System Technical Specifications
literature number 5963-6609E

Test Systems and VXI Products Catalog
literature number 5980-0307E

Visit Our Websites

Agilent Communications Intelligence Information —
www.agilent.com/find/COMINT

Agilent VXI Product Information —
www.agilent.com/find/vxi

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 452 4844

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9210 5947

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.
Copyright © 2000, 2001 Agilent Technologies
Printed in U.S.A. January 16, 2001
5988-0562EN



Agilent Technologies

Innovating the HP Way