

# Model 1A0006-3

# Anaren

## Hybrid Couplers

3 dB, 90°

### Applications

- Balanced Mixers
- Antenna Feed Networks
- Phasing Networks
- Divider/Combiners



### Features

- Military Grade
- 2-Way Power Split
- Quadrature
- Connectors Per MIL-C-39012
- Rugged Aluminum Housing
- Low VSWR


### Electrical Specifications

| Frequency<br>GHz    | Isolation<br>dB Min/Typ   | Insert. Loss<br>dB Max | VSWR<br>Max : 1 |
|---------------------|---------------------------|------------------------|-----------------|
| 2.4 - 2.8           | 19                        | 0.35                   | 1.30            |
| Amp. Bal.<br>dB Max | Phase Bal.<br>Degrees Max | Power<br>Ave. CW Watts |                 |
| ±0.35               | ±3.0                      | 100                    |                 |

**Notes:** Impedance: 50 ohms nominal. Meets MIL-E-5400 Class III requirements. Additional screening available for military and space applications.

**Electrical and Mechanical Specifications subject to change without notice.**

### Outline Drawing

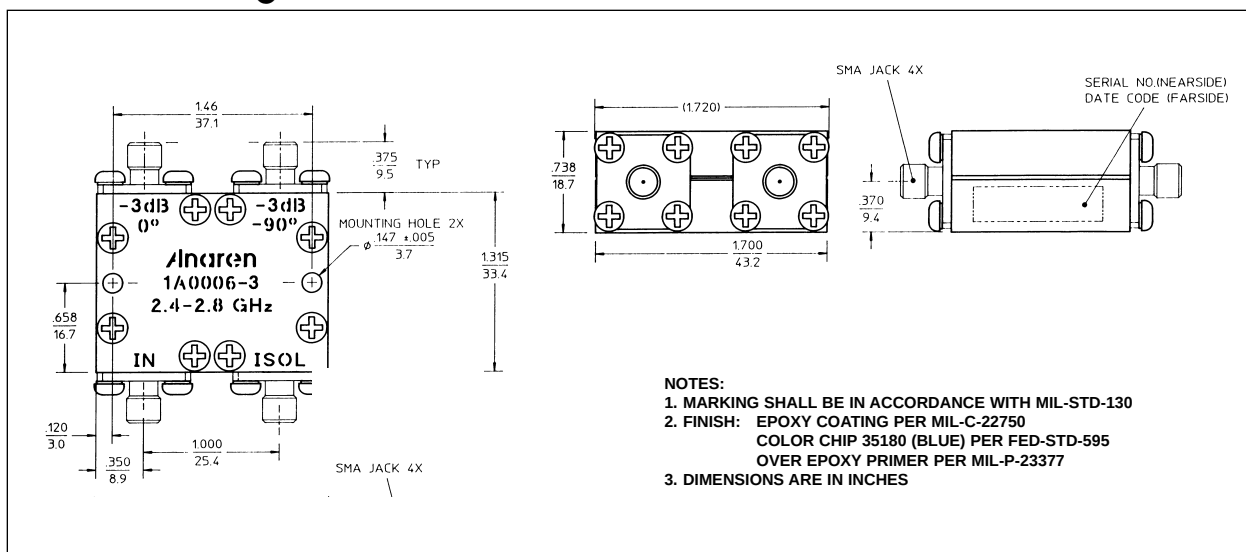

**Sales Desk USA:** Voice: (800) 544-2414 Fax: (315) 432-9121  
**Sales Desk Europe:** Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369