

Installation Note

Option 010 Time Domain Upgrade Kit

**For Agilent 8719D, 8720D, 8722D,
8719ET, 8720ET, 8722ET,
8719ES, 8720ES, and 8722ES Network Analyzers**

Network Analyzer Model Number	Applicable Upgrade Kit Model Number
8719D	8719DU Option 010
8720D	8720DU Option 010
8722D	8722DU Option 010
8719ET	8719ETU Option 010
8720ET	8720ETU Option 010
8722ET	8722ETU Option 010
8719ES	8719ESU Option 010
8720ES	8720ESU Option 010
8722ES	8722ESU Option 010



Agilent Technologies

Part Number 08720-90408 Supersedes May 2000

Printed in USA September 2001



08720-90408

Notice.

The information contained in this document is subject to change without notice.

Agilent Technologies makes no warranty of any kind with regard to this material, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Agilent Technologies shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

© Copyright 2000, 2001 Agilent Technologies, Inc.

All Rights Reserved. Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

1400 Fountaingrove Parkway, Santa Rosa, CA 95403-1799, USA

Time Domain Upgrade Kit

Products Affected:	8719D/8720D/8722D 8719ET/8720ET/8722ET 8719ES/8720ES/8722ES
To Be Performed By:	Agilent Service Center, Personnel Qualified by Agilent, or Customer
Estimated Installation Time:	30 minutes
Estimated Verification Time:	30 minutes

Purpose

This Option 010 upgrade kit provides the network analyzer with time domain operation. The upgrade kit is keyed to the serial number of a specific network analyzer and cannot be used to upgrade other instruments.

Items Included in the Kit

Table 1 describes the parts included in this upgrade kit. Check the contents of this kit against Table 1.

Table 1 **Option 010 Upgrade Kit Contents**

Quantity	Description	Part Number
1	Installation note	08720-90408
2	Keyword label (affixed to page 5) Keyword label (to affix to instrument)	9320-6215
1	Envelope	9230-0023

Equipment and Tools Required

Table 2 **Required Equipment and Tools**

Quantity	Description
1	TORX T-10 screwdriver
1	TORX T-15 screwdriver
1	Electrostatic discharge (ESD) grounding strap and mat

Safety Considerations

WARNING	Before you disassemble the instrument, turn the power switch OFF and unplug the instrument. Failure to unplug the instrument can result in personal injury.
---------	---

CAUTION	Electrostatic discharge (ESD) can damage or destroy electronic components. Perform these procedures only at a static-safe workstation and wear a grounding strap. Refer to the documentation that pertains to your instrument for information about static-safe workstations and ordering static-safe accessories.
---------	--

Conventions

This installation note uses the following conventions for front-panel keys and softkeys.

Front-Panel Key represents a key physically located on the instrument. **SOFTKEY** represents a “softkey,” a key whose label is determined by the instrument’s firmware.

Installation Procedure for the Option 010 Upgrade Kit


The network analyzer must be in proper working condition prior to installing this option. Any necessary repairs must be made before proceeding with this installation.

NOTE The network analyzer is shown in the illustrations of this installation procedure is only a representative illustration of many network analyzers of this series. It may not accurately reflect your network analyzer model in every detail. However, these slight differences will not affect the procedures of this installation.

Verify the Serial Number

Refer to the keyword label in the box below. First, verify that the analyzer's serial number matches the serial number on the keyword label. Second, verify that the option number on the keyword label matches the option number for this installation note. If in either step, the serial number or the option number does not match the expected results, the keyword will not enable the option. If this is the case, refer to [“Contacting Agilent” on page 10](#) and contact the nearest sales or service office for assistance.

Keyword Label




Remove the Bottom Cover

Refer to [Figure 1](#).

1. Disconnect the power cord from the rear of the instrument and set the analyzer on its side.
2. Remove both of the lower feet (item 4) by loosening the TORX T-10 screws (item 5).
3. Loosen the captive TORX T-15 screw (item 6). This will cause the cover to pull away from the front frame.
4. Slide the cover towards the rear of the instrument, then pull it out and away. (The cover has a tight fit and may need to be worked loose.)

Figure 1 **Cover Removal**

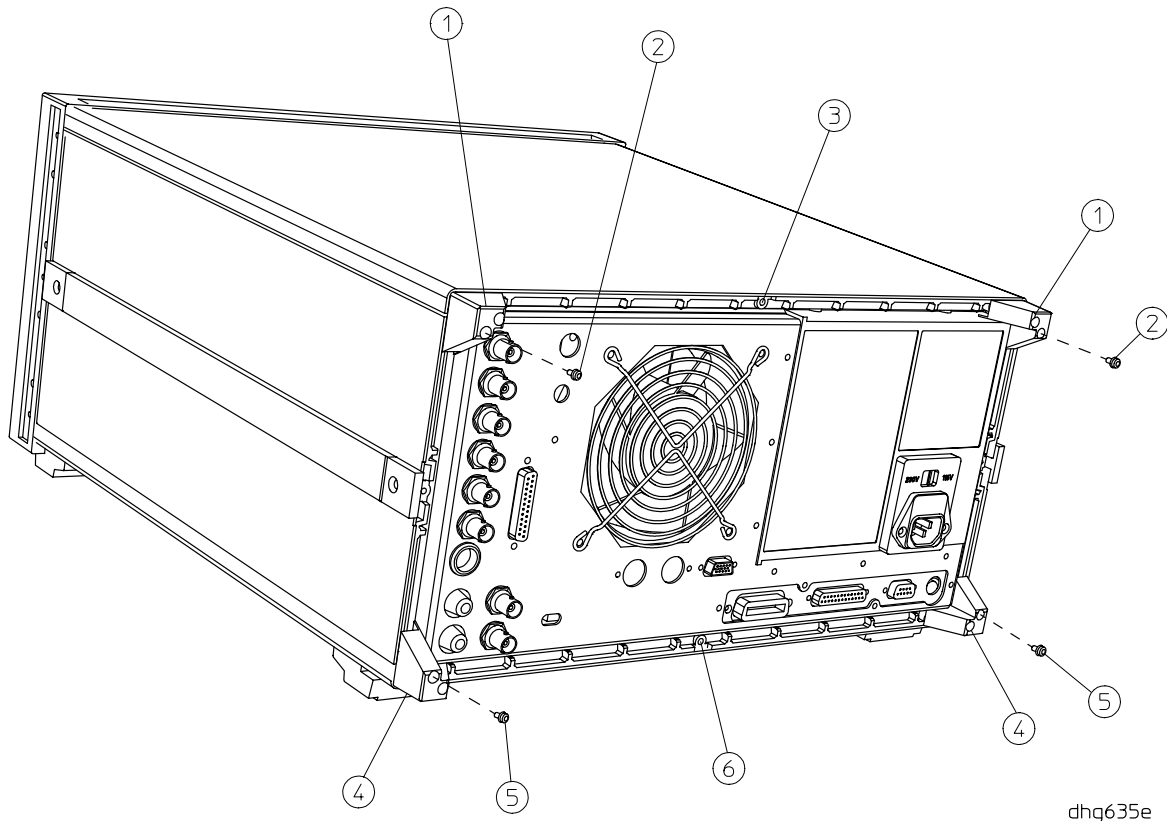

Configure the Analyzer for Time Domain Operation

5. Refer to [Figure 2](#) or [Figure 3](#):

- Use [Figure 2](#) and step [5a](#) if your analyzer is an ET or ES model or if your D model has firmware revision 07.xx or later. (If necessary, refer to the following note to determine your analyzer firmware revision.)
- Use [Figure 3](#) and step [5b](#) if your analyzer is a D model and has firmware revision 06.xx. (If necessary, refer to the following note to determine your analyzer firmware revision.)


NOTE

To determine your analyzer firmware revision, press the following keys:

(System) SERVICE MENU TESTS FIRMWARE REVISION


The firmware revision is the numbers that follow the model number. For example, firmware revision 07.64 would be an 07.xx revision.

Figure 2 A7 CPU Board CC Switch Location (for ET/ES Models and D Models with Firmware Revision 07.xx and later)

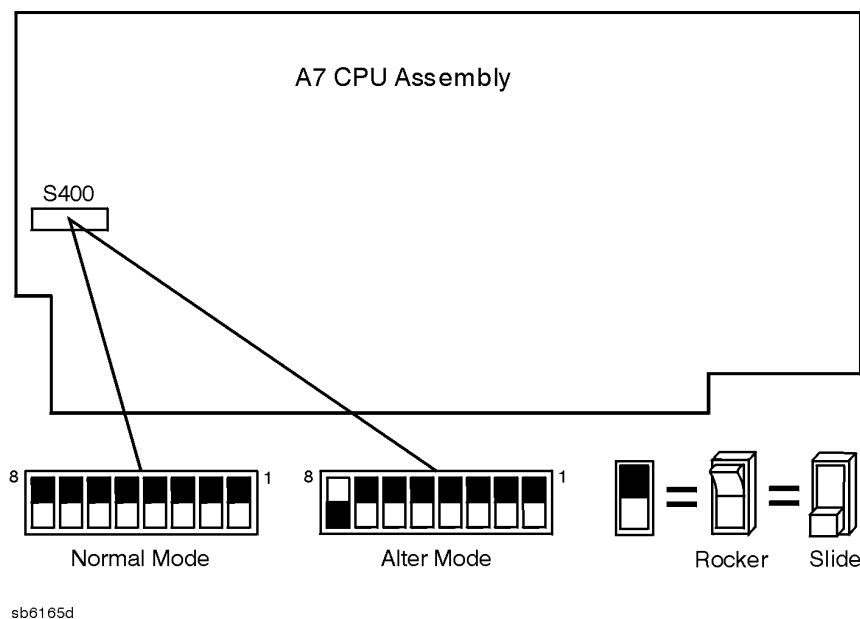

5a. Locate the CPU board and set the CC switch to the alternate (Alter Mode) position, using [Figure 2](#) as a guide.

Figure 3 A7 CPU Board CC Jumper Location (for D Models with Firmware Revision 06.xx)

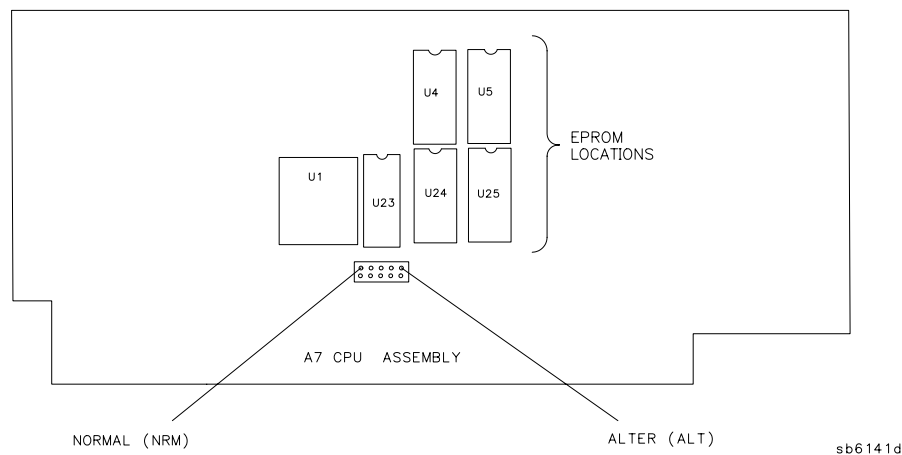

5b. Locate the CPU board and move the Correction Constants (CC) jumper from the normal (NRM) position to the alternate (ALT) position, using [Figure 3](#) as a guide.

6. Reinstall the bottom cover and set the analyzer upright for normal operation.
7. Reconnect the analyzer power cord and switch on the power.
8. After the instrument has initialized, press **Preset** **Display** **MORE** **TITLE** **ERASE TITLE** to erase the title.
9. Enter the keyword from the label located on [page 5](#). There are two methods to do this: use a keyboard connected to the analyzer's mini-DIN connector on the rear panel, or rotate the front panel knob to position the arrow below each character of the keyword. Press **SELECT LETTER** to enter each character. When all characters are entered, press **DONE**.

NOTE *Be sure to use upper-case letters when entering via a keyboard.*

10. Press **System** **SERVICE MENU** **TESTS** **(50)** **(x1)** **EXECUTE TEST** **YES**.

11. If the display shows:

- Test 50 Option Cor DONE, press **Preset**. Proceed to [“Verify Time Domain Operation.”](#)
- Test 50 Option Cor FAIL, perform the following steps to correct the failure:
 - ☐ Make sure that you entered the keyword correctly by repeating the previous steps.
 - ☐ Press **System** **SERVICE MENU** **FIRMWARE REVISION**. Compare the serial number shown on the analyzer's display to the one on the keyword label included with this installation note.
 - ☐ If the serial numbers do not match, or if Test 50 fails repeatedly, refer to [“Contacting Agilent” on page 10](#) and notify Agilent for assistance.

Verify Time Domain Operation

12. Switch the instrument power on and press **Preset**, then **System**. Softkey 4 should be labeled **TRANSFORM MENU**.

Return the CC Switch (or CC Jumper) on the A7 CPU Board to Normal

13. Switch off the power, disconnect the analyzer power cord, and remove the bottom cover.


14. Depending on the analyzer model and firmware revision that you determined in step 5, perform one of the following steps:

- Use step [5a](#) and [Figure 2](#) to set the CC switch to the Normal Mode position.
- Use step [5b](#) and [Figure 3](#) to move the Correction Constants (CC) jumper from the alternate (ALT) position to the normal (NRM) position.

Affix the Keyword Label

15. Locate the keyword label in the small envelope and remove it from its backing. Affix the label onto the location shown in [Figure 4](#).
16. Replace the bottom cover.
17. Replace the feet on the rear corners of the instrument (*item 4 of [Figure 1](#)*).

Figure 4 **Location of Keyword Label, Top View of Analyzer**

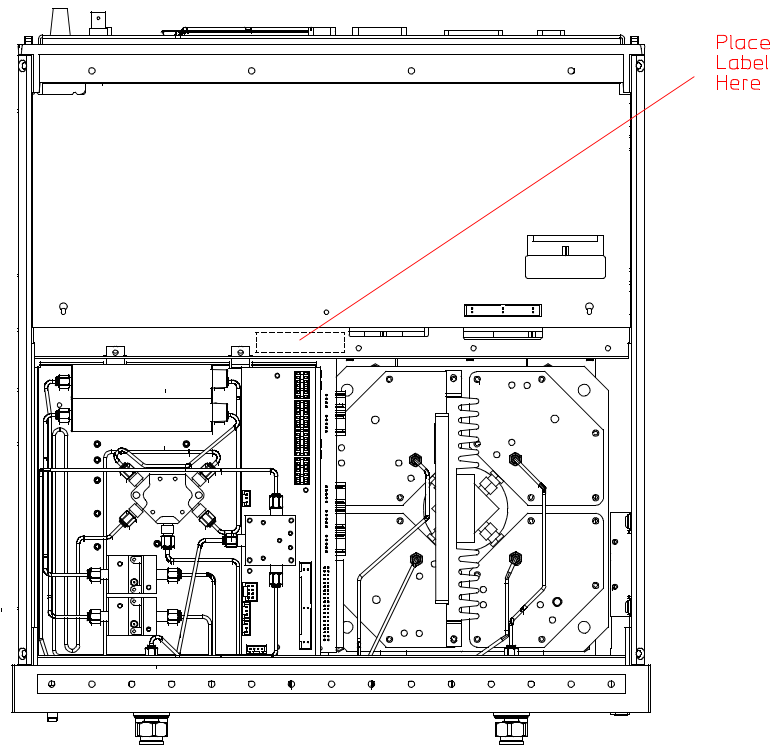

Contacting Agilent

Online assistance: www.agilent.com/find/assist			
Americas			
Brazil (tel) (+55) 11 4197 3600 (fax) (+55) 11 4197 3800	Canada (tel) 877 894 4414 (fax) (+1) 905 282-6495	Mexico (tel) (+52) 55 5081 9469 (alt) 01800 5064 800 (fax) (+52) 55 5081 9467	United States (tel) 800 829 4444 (alt) (+1) 303 662 3998 (fax) 800 829 4433
Asia Pacific and Japan			
Australia (tel) 1800 629 485 (alt) 1800 143 243 (fax) 1800 142 134	China (tel) 800 810 0189 (alt) (+86) 10800 650 0021 (fax) 800 820 2816	Hong Kong (tel) 800 930 871 (alt) (+852) 3197 7889 (fax) (+852) 2 506 9233	India (tel) 1600 112 929 (fax) 000800 650 1101
Japan (tel) 0120 421 345 (alt) (+81) 426 56 7832 (fax) 0120 421 678	Malaysia (tel) 1800 888 848 (alt) 1800 828 848 (fax) 1800 801 664	Singapore (tel) 1800 375 8100 (alt) (+65) 6 375 8100 (fax) (+65) 6836 0252	South Korea (tel) 080 769 0800 (alt) (+82) 2 2004 5004 (fax) (+82) 2 2004 5115
Taiwan (tel) 0800 047 866 (alt) 00801 651 317 (fax) 0800 286 331	Thailand (tel) 1800 226 008 (alt) (+66) 2 268 1345 (fax) (+66) 2 661 3714		
Europe			
Austria (tel) 0820 87 44 11* (fax) 0820 87 44 22	Belgium (tel) (+32) (0)2 404 9340 (alt) (+32) (0)2 404 9000 (fax) (+32) (0)2 404 9395	Denmark (tel) (+45) 7013 1515 (alt) (+45) 7013 7313 (fax) (+45) 7013 1555	Finland (tel) (+358) 10 855 2100 (fax) (+358) 10 855 2923
France (tel) 0825 010 700* (alt) (+33) (0)1 6453 5623 (fax) 0825 010 701*	Germany (tel) 01805 24 6333* (alt) 01805 24 6330* (fax) 01805 24 6336*	Ireland (tel) (+353) (0)1 890 924 204 (alt) (+353) (0)1 890 924 206 (fax) (+353) (0)1 890 924 024	Israel (tel) (+972) 3 9288 500 (fax) (+972) 3 9288 501
Italy (tel) (+39) (0)2 9260 8484 (fax) (+39) (0)2 9544 1175	Luxemburg (tel) (+32) (0)2 404 9340 (alt) (+32) (0)2 404 9000 (fax) (+32) (0)2 404 9395	Netherlands (tel) (+31) (0)20 547 2111 (alt) (+31) (0)20 547 2000 (fax) (+31) (0)20 547 2190	Russia (tel) (+7) 095 797 3963 (alt) (+7) 095 797 3900 (fax) (+7) 095 797 3901
Spain (tel) (+34) 91 631 3300 (alt) (+34) 91 631 3000 (fax) (+34) 91 631 3301	Sweden (tel) 0200 88 22 55* (alt) (+46) (0)8 5064 8686 (fax) 020 120 2266*	Switzerland (French) (tel) 0800 80 5353 opt. 2* (alt) (+33) (0)1 6453 5623 (fax) (+41) (0)22 567 5313	Switzerland (German) (tel) 0800 80 5353 opt. 1* (alt) (+49) (0)7031 464 6333 (fax) (+41) (0)1 272 7373
Switzerland (Italian) (tel) 0800 80 5353 opt. 3* (alt) (+39) (0)2 9260 8484 (fax) (+41) (0)22 567 5314	United Kingdom (tel) (+44) (0)7004 666666 (alt) (+44) (0)7004 123123 (fax) (+44) (0)7004 444555		
(tel) = primary telephone number; (alt) = alternate telephone number; (fax) = FAX number; * = in country number			