

# Model 1F0626-XX



## Directional Couplers "H" Style



### Applications

- Subassemblies
- Lab Systems
- Leveling Loops
- Power Monitoring
- Test and Calibration

### Features

- Military Grade
- 2.0 - 4.0 GHz
- Compact Package
- "H" Style Configuration
- Connectors per MIL-C-39012
- High Directivity

### Electrical Specifications


Model#	Frequency GHz	Coupling dB Min/Typ	Insert. Loss dB Max	Input VSWR Max:1	
1F0626-6	2.0 - 4.0	6.0 ± 0.5	0.35	1.25	
1F0626-10	2.0 - 4.0	10.0 ± 0.5	0.35	1.25	
1F0626-20	2.0 - 4.0	20.0 ± 1.25	0.35	1.25	

Model #	Freq. Sens. dB Max	Directivity dB Min/Typ	Max CW Power*	
			Forward	Backward
1F0626-6	±0.75	20/25	20	2
1F0626-10	±0.80	20/25	50	5
1F0626-20	±1.25	18/23	100	50

**Notes: Electrical and Mechanical Specifications subject to change without notice.** Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. \*These ratings are maximum Watts and apply when optional termination is supplied by Anaren and coupled port VSWR is 2.0:1 or less. Higher power can be handled with a lower VSWR termination. In general the Max CW Power is identical to 3 dB couplers when there is no internal termination or one supplied by Anaren. All models have SMA connectors.

### Outline Drawing

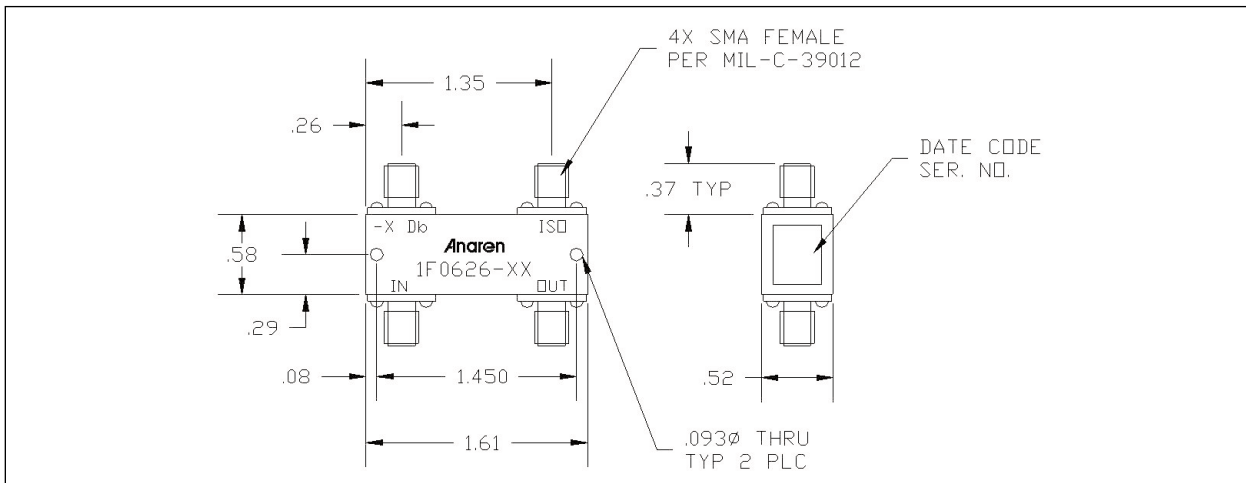

**Sales Desk USA:** Voice: (800) 544-2414 Fax: (315) 432-9121  
**Sales Desk Europe:** Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369