
SERVICE 701D TELEPHONE SETS

1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1.

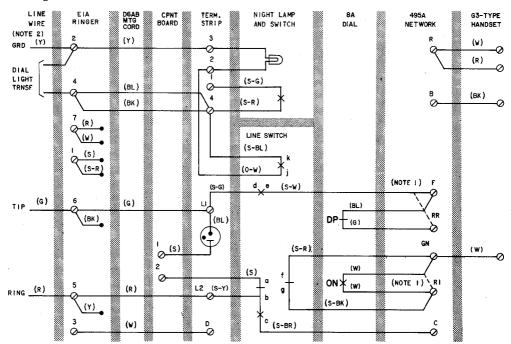

NOTES:

- DOTTED LINES INDICATES CONNECTION FOR MANUAL SERVICE, DIAL REMAINS ON THE SET.
- GROUND MAY BE OMITTED IF NOT REQUIRED FOR SERVICE; NOT REQUIRED FOR PROTECTION OF DIAL-LIGHT TRANSFORMER.
- SET WIRED FOR BRIDGED SERVICE. SEE TABLE A FOR OTHER CLASSES OF SERVICE.
- 4. LINE SWITCH SEQUENCE, HANDSET REMOVED.
 - (1) bc- MAKES
- (4) gf-BREAKS (5) jk-MAKES
- (2) de MAKES (3) ab - BREAKS
- ON DIAL OFF-NORMAL CONTACT
 DP DIAL-PULSE CONTACT

Fig. 1-\$701D (MD) Telephone Set, Connections

TABLE A

LINE AND RINGER CONNECTIONS

WIRE OR LEAD		INDIVIDUAL	RING	TIP
		OR BRIDGED	PARTY	PARTY
Ringer	R	7	7	7
	S-R	1	1	1
	BK	6	2	2
	S	1	1	1
Capacitor in Ringer	W	7 5	7 5	7 6
Mtg Cord	R	5	5	6
at Ringer	G	6	6	5