


AMM-6702UC

20-55 GHz GaAs LO Driver Amplifier

DEVICE OVERVIEW

General Description

The AMM-6702 is a broadband MMIC LO buffer amplifier that efficiently provides high gain and output power over a 20-55 GHz frequency band. It is designed to provide a strong, flat output power response when driven with an input power at 0 dBm. It has built-in DC blocking capacitors on the input and output.




Features

- High 25+ dB gain
- Broadband performance
- +20 dBm output power
- 20%+ PAE

Applications

- SATCOM
- 5G
- Radar
- Optimal LO driver amp for Marki S-diode and H-diode mixers and millimeter-wave multipliers
- Test and Measurement Equipment

Functional Block Diagram

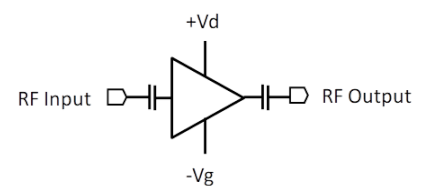

Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
AMM-6702UC	20-55 GHz GaAs LO Driver Amplifier	UC	-	RoHS	Released	EAR99
<u>AMM-6702UC5</u>	20-55 GHz GaAs LO Driver Amplifier	UC5	-	RoHS	Released	EAR99

Table Of Contents

■ Device Overview	- General Description - Features - Applications - Functional Block Diagram
■ Port Configuration and Functions	- Port Diagram - Port Functions
■ Revision History	
■ Specifications	- Absolute Maximum Ratings - Package Information - Recommended Operating Conditions - Sequencing Requirements - Electrical Specifications - Typical Performance Plots - Conversion Loss of Marki Mixers Using AMM-6702UC as LO Driver - Input-Referred IP3 of Marki Mixers Using AMM-6702UC as LO Driver
■ Mechanical Data	Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2018-10-01	Datasheet Initial Release
A	2019-01-01	AMM-6702UC Release, additional data
B	2019-02-01	Updated Export Classification
C	2019-03-01	Updated Module Production Specs
D	2019-08-01	Updated Module Production Specs
E	2019-09-01	Updated Absolute Maximum Ratings
F	2020-01-01	Added .s2p Files Link
G	2020-02-01	Updated Datasheet Format, Expanded Performance Plots, Expanded Electrical Specs, Added Sequencing Procedure, Added AMM-6702UC5 Package
H	2020-04-01	Updated AMM-6702UC5 Specs and Performance Plots
I	2020-06-01	Corrected AMM-6702UC Outline Drawing to include Ground Screw
J	2020-06-01	Updated Absolute Maximum Ratings
L	2020-07-01	Revised Max Operating Temperature
K	2020-07-01	Update AMM-6702UC5 Saturated Output Power Min Spec
M	2020-09-01	Updated Ground Pin Location on AMM 6702UC5 Module
N	2020-10-01	Updated Thermal Specs, Updated OIP3 Spec
O	2020-11-01	Updated Min Frequency Spec
P	2020-12-01	Updated Electrical Specifications Table





Port Configuration and Functions

Port Diagram

A top-down view of the AMM-6702UC's outline drawing is shown below. The port functions are detailed below.

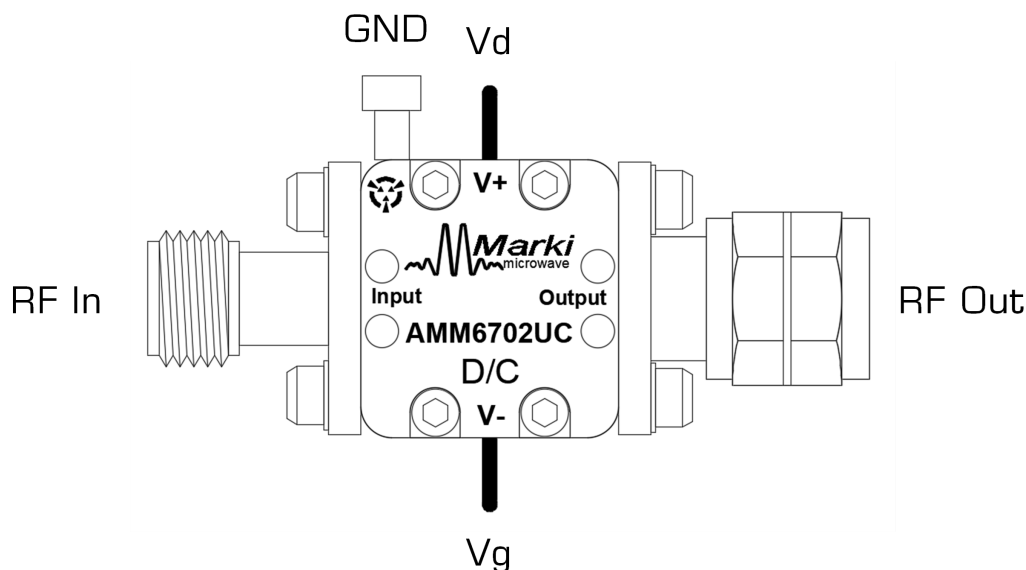

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	Exterior housing must be connected to a DC/RF ground potential with high thermal and electrical conductivity.	GND 
RF In	RF Input	This is the RF Input port of the amplifier die. It is internally DC blocked and RF matched to 50 Ω .	
RF Out	RF Output	This is the RF Output port of the amplifier die. It is internally DC blocked and RF matched to 50 Ω .	
Vd	Drain Supply Pin	The Vd pin supplies drain voltage to the amplifier IC. Apply gate voltage Vg before applying drain voltage.	
Vg	Gate Supply Pin	The Vg pin supplies negative control voltage to the amplifier and controls the amplifier gain. Lower (more negative) voltages on a Vg pad will result in lower drain current and lower small signal gain.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Continuous Power Dissipation (PDISS)	824	mW
Maximum Operating Temperature	85	°C
Maximum Storage Temperature	150	°C
Max Junction Temperature for MTTF > 1E6 Hours	175	°C
Minimum Operating Temperature	-40	°C
Minimum Storage Temperature	-65	°C
Negative Bias Current (Pin 4)	10	μA
Negative Bias Voltage (Pin4)	-2	V
Positive Bias Current (Pin1)	400	mA
Positive Bias Voltage (Pin1)	4.5	V
RF Input Power	22	dBm
Thermal Resistance, θJC	90	°C/W

Package Information

Parameter	Details	Rating
ESD	< 250 Volts	HBM Class 0
Weight	Package name: UC	12.3g
Dimensions	-	13.21 x 14.21 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the Electrical Specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Negative DC Voltage	-0.4	-0.5	-0.6	V
Positive DC Voltage	2	3.5	4	V
Positive DC Current	100	180	350	mA
Ambient Temperature	-55	25	85	°C

Sequencing Requirements

Turn-on Procedure:

1. Apply <-0.4V to Vg (Pin 4)
2. Apply Vd (Pin 1)

Turn-off Procedure:

1. Turn off Vd (Pin 1)
2. Turn off Vg (Pin 4)







Electrical Specifications







The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Small Signal Gain	3.0V/-0.5V Bias	21	55	-	24	-	dB
Small Signal Gain	3.5V/-0.5V Bias	21	25	-	25	-	dB
Small Signal Gain	4.0V/-0.5V Bias	21	55	-	23	-	dB
Small Signal Gain	3.5V/-0.5V Bias	25	48	20	24	-	dB
Small Signal Gain	3.5V/-0.5V Bias	48	55	-	22	-	dB
Noise Figure	3.5V/-0.5V bias, 25 dBm Input Power	21	55	-	6.5	-	dB
Saturated Output Power	3.0V/-0.5V Bias	21	55	-	19	-	dBm
Saturated Output Power	3.5V/-0.5V Bias	21	25	-	20	-	dBm
Saturated Output Power	4.0V/-0.5V Bias	21	55	-	20	-	dBm
Saturated Output Power	3.5V/-0.5V Bias	25	48	17	21	-	dBm
Saturated Output Power	3.5V/-0.5V Bias	48	55	-	17	-	dBm
Output IP3	3.5V/-0.5V bias, -25 dBm Input Power	21	55	-	27	-	dBm
Input IP3	3.5V/-0.5V bias, -25 dBm Input Power	21	55	-	3	-	dBm
P1dB	3.5V/-0.5V bias	21	55	-	14.8	-	dBm
Input Return Loss	3.5V/-0.5V bias, 25 dBm Input Power	21	55	-	8	-	dB
Output Return Loss	3.5V/-0.5V bias, 25 dBm Input Power	21	55	-	9	-	dB
Reverse Isolation	3.5V/-0.5V bias, 25 dBm Input Power	21	55	-	45	-	dB
Input Power for Saturation	3.5V/-0.5V bias	21	55	-	3	-	dBm
Bias Requirements ¹	3.5V/-0.4V	-	-	-	230	-	mA
Bias Requirements ²	3.5V/-0.5V	-	-	-	180	-	mA
Bias Requirements ³	3.5V/-0.6V	-	-	-	130	-	mA


[1][2][3] Bias conditions tested with no RF input power. See section 3.6 for DC current vs. RF power

Typical Performance Plots

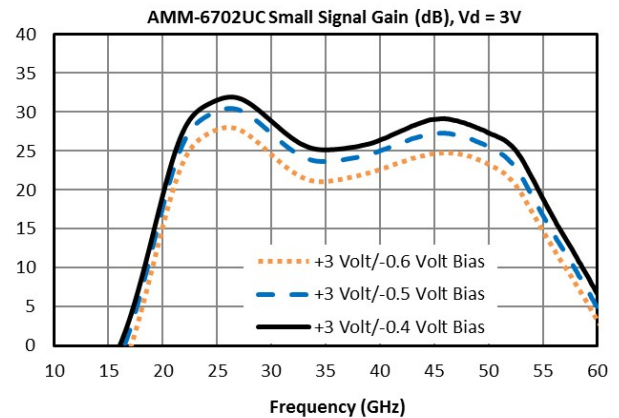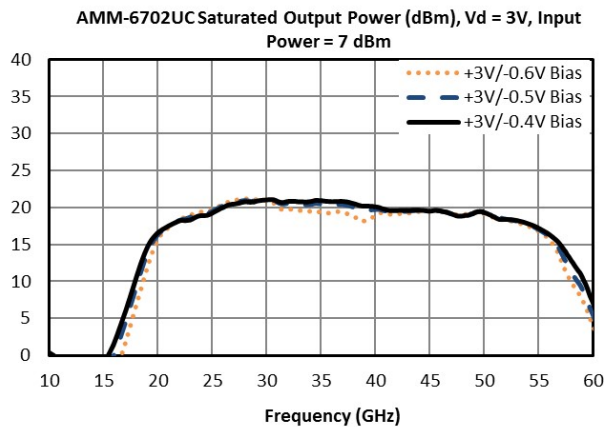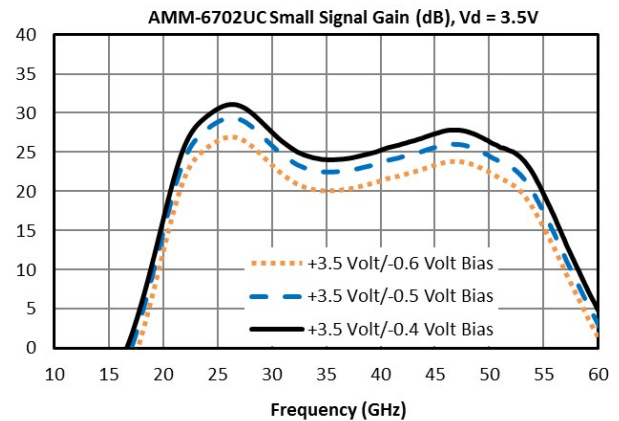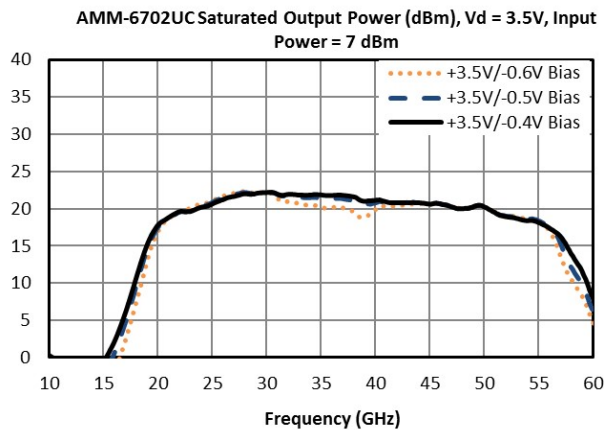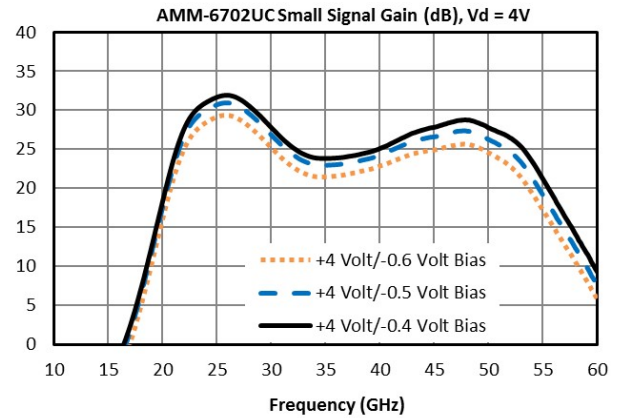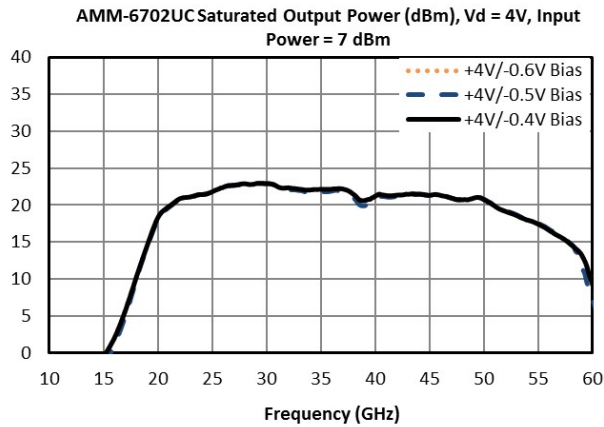


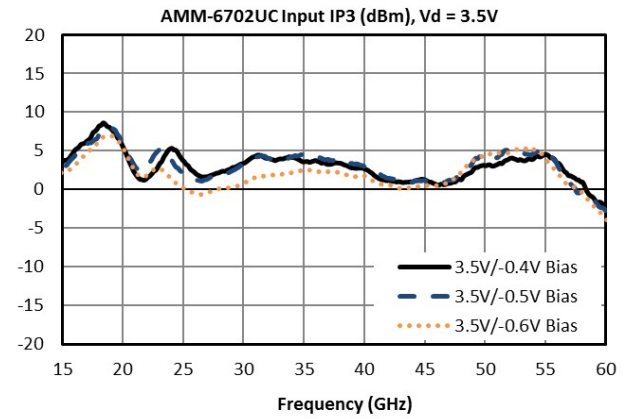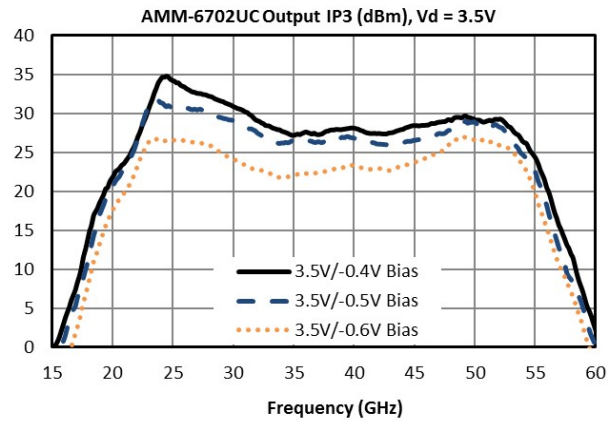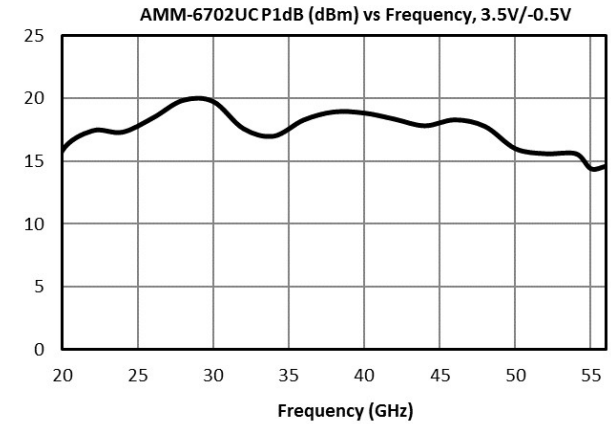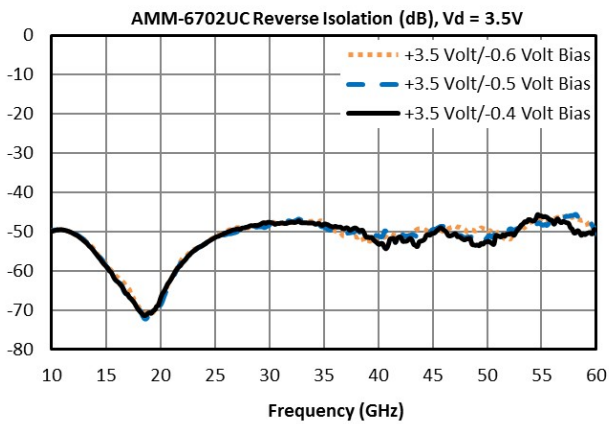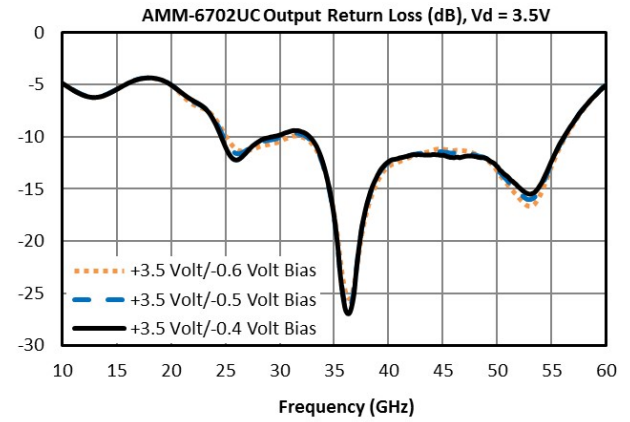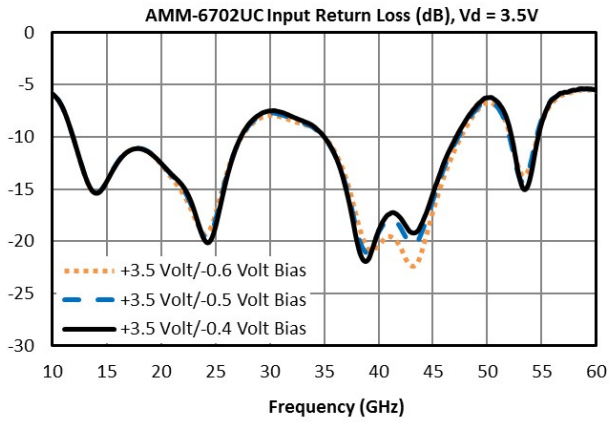


AMM-6702UC Small Signal Gain (dB) vs Temperature,
3.5V/-0.5V Bias

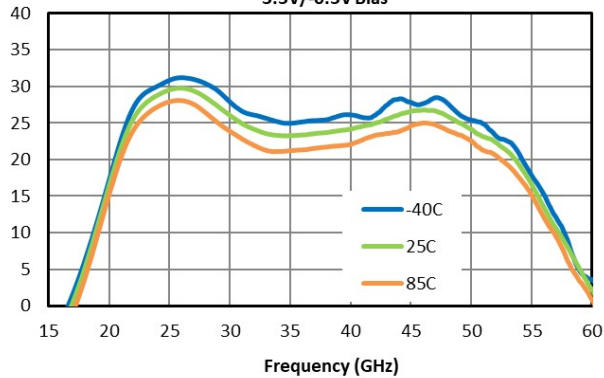


AMM-6702UC Saturated Output Power (dBm) vs Temperature,
3.5V/-0.5V Bias

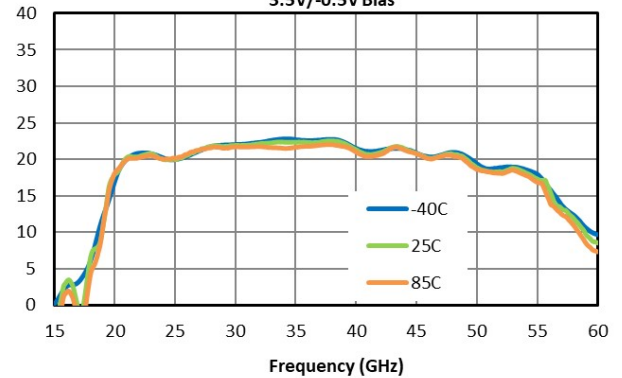


AMM-6702UC Gain, Output Power, PAE vs. Input Power @ 30 GHz,
3.5V/-0.5V Bias

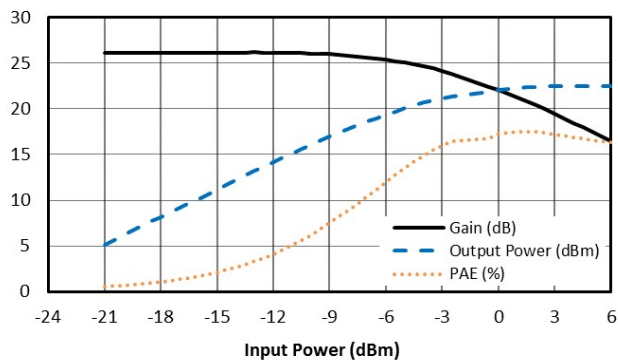


AMM-6702UC Quiescent Current Consumption (mA) vs. Vg

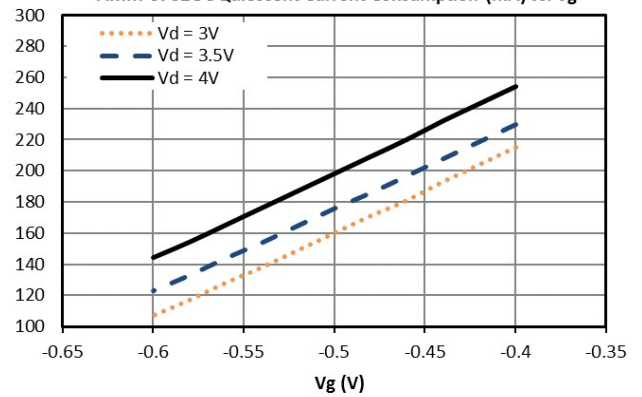


AMM-6702UC Quiescent Current Consumption (mA) vs. Vd

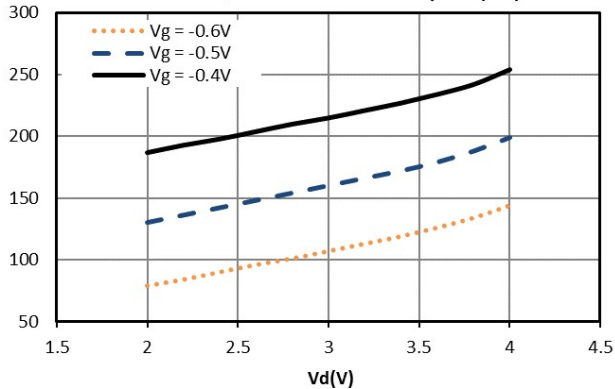


AMM-6702UC Current Consumption (mA) vs. RF Input Power,
3.5V/-0.5V Bias

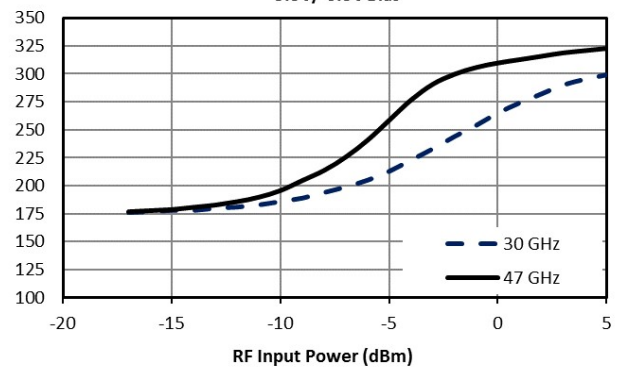

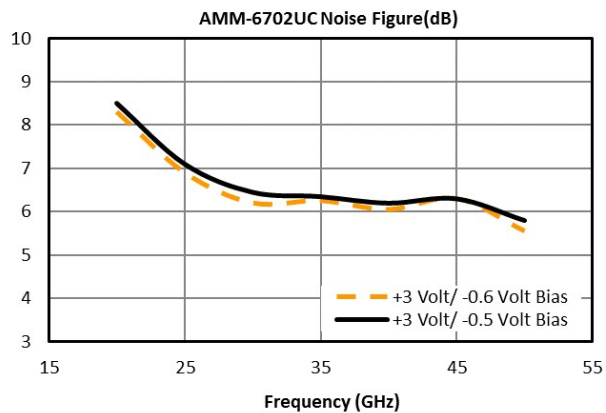


Conversion Loss of Marki Mixers Using AMM-6702UC as LO Driver


Conversion Loss of Marki MM1-1857H Mixer using AMM-6702UC as LO Driver Amplifier (dB), 3.5V/-0.4V Bias Condition, 3dBm Input, IF = 100 MHz, LO = RF-IF

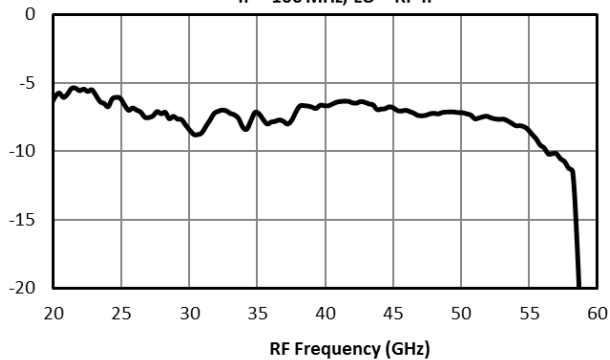

Conversion Loss of Marki MMIQ-1865L Mixer using AMM-6702UC as LO Driver Amplifier (dB), 3.5V/-0.4V Bias Condition, 3dBm Input, IF = 100 MHz, LO = RF - IF

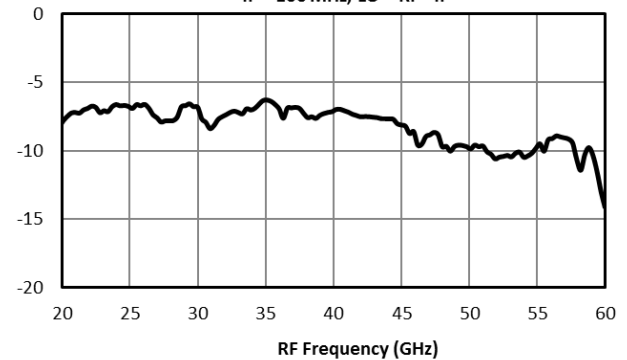


Conversion Loss of Marki MMIQ-1865H Mixer using AMM-6702UC as LO Driver Amplifier (dB), 3.5V/-0.4V Bias Condition, 3dBm Input, IF = 100 MHz, LO = RF-IF

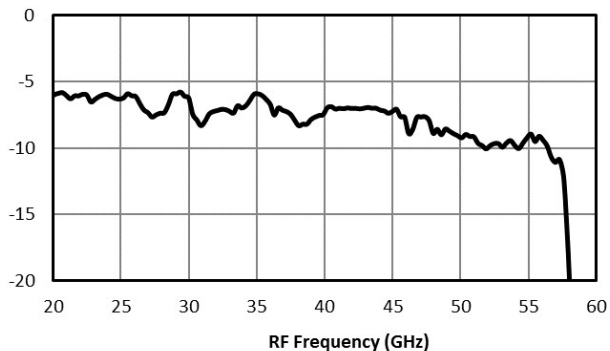


Input-Referred IP3 of Marki Mixers Using AMM-6702UC as LO Driver


Input IP3 of Marki MM1-1857H Mixer using AMM-6702UC as LO Driver Amplifier (dBm), 3.5V/-0.4V Bias Condition, 3dBm Input, IF = 100 MHz, LO = RF - IF

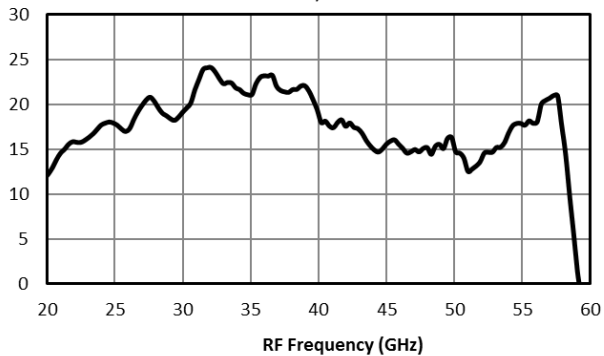

Input IP3 of Marki MMIQ-1865L Mixer using AMM-6702UC as LO Driver Amplifier (dBm), 3.5V/-0.4V Bias Condition, 3dBm Input, IF = 100 MHz, LO = RF - IF

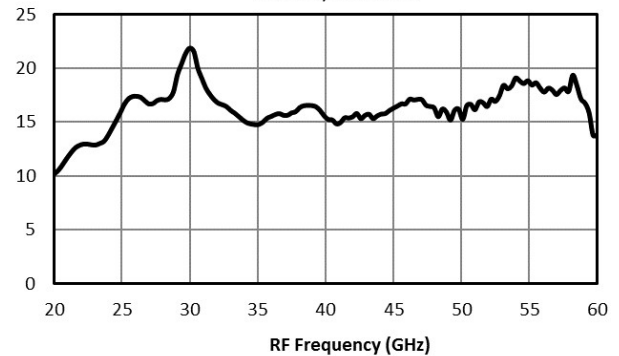

Input IP3 of Marki MMIQ-1865H Mixer using AMM-6702UC as LO Driver Amplifier (dBm), 3.5V/-0.4V Bias Condition, 3dBm Input, IF = 100 MHz, LO = RF - IF

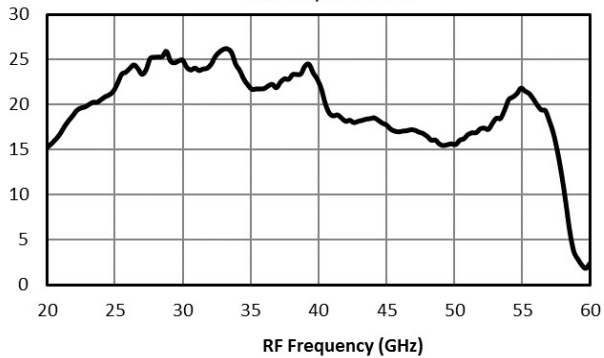


AMM-6702UC

20-55 GHz GaAs LO Driver Amplifier

Mechanical Data

Outline Drawing

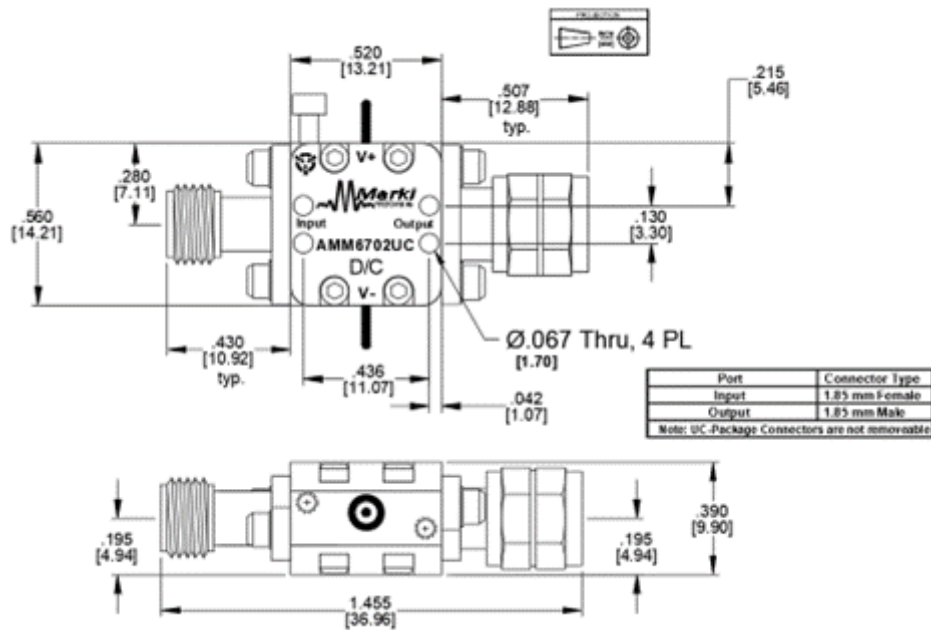

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2018 - 2020, Marki Microwave, Inc