


## BTN2-0050

### High Power Bias Tee

## DEVICE OVERVIEW

### General Description

The BTN2-0050 is constructed using a custom-made, resonance-free conical inductor to achieve extremely broadband performance. By minimizing the overall inductor size and using proprietary packaging techniques, the BTN2-0050 is a superior option in terms of performance, reliability and ease-of-use when compared to cumbersome user-designed bias tees employing off-the-shelf conical inductors. The extremely low cutoff and resonance free operation makes the BTN2-0050 suitable for biasing amplifiers, lasers, and modulators driven with high frequency data patterns.



[Download s-parameters here](#)


### Features

- Broadband: 3 MHz to 50 GHz
- Low Insertion Loss
- High Power
- Non-Resonant
- Compact Size

### Applications

- Test and Measurement Equipment

### Functional Block Diagram



### Part Ordering Options

| Part Number | Description         | Package | Packing Size | Green Status | Product Lifecycle | Export Classification |
|-------------|---------------------|---------|--------------|--------------|-------------------|-----------------------|
| BTN2-0050   | High Power Bias Tee | -       | -            | RoHS         | Released          | EAR99                 |

## Table Of Contents




|                                           |                                                        |
|-------------------------------------------|--------------------------------------------------------|
| ■ <b>Device Overview</b>                  | ■ <b>Specifications</b>                                |
| General Description                       | Absolute Maximum Ratings                               |
| Features                                  | Package Information                                    |
| Applications                              | Electrical Specifications                              |
| Functional Block Diagram                  | Typical Performance Plots                              |
|                                           | Typical Performance vs Bias Current at Low frequencies |
| ■ <b>Port Configuration and Functions</b> | Time Domain Performance Plot                           |
| Port Functions                            |                                                        |
| ■ <b>Revision History</b>                 | ■ <b>Mechanical Data</b>                               |
|                                           | Outline Drawing                                        |
|                                           | ■ <b>Operation</b>                                     |
|                                           | Application Information                                |

## Revision History

| Revision Code | Revision Date | Comment                                 |
|---------------|---------------|-----------------------------------------|
| C             | 2020-10-01    | Added Performance Plots vs Bias Current |

## Port Configuration and Functions

### Port Functions

| Port   | Function | Description                                                                                                             | Equivalent Circuit for Package                                                      |
|--------|----------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Common | RF+DC    | This port is DC blocked to the RF port and DC connected to the DC port through an internal RF choke.                    |  |
| DC     | DC       | This port is internally connected to an RF choke which is DC connected to the RF+DC port and DC blocked to the RF port. |  |
| RF     | RF       | This port is internally DC blocked to the RF+DC and DC ports.                                                           |  |

## Specifications

### Absolute Maximum Ratings

| Parameter  | Maximum Rating | Unit |
|------------|----------------|------|
| DC Current | 2              | A    |
| DC Voltage | 50             | V    |
| RF Power   | 5              | W    |

### Package Information

| Parameter  | Details | Rating           |
|------------|---------|------------------|
| Weight     | -       | 10g              |
| Dimensions | -       | 11.94 x 11.94 mm |







### Electrical Specifications



Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

| Parameter                      | Test Conditions | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ | Max | Unit |
|--------------------------------|-----------------|-------------------------|-------------------------|-----|-----|-----|------|
| Capacitance                    | -               | -                       | -                       | -   | 100 | -   | nF   |
| DC Port Isolation              | -               | 1                       | 50                      | -   | 30  | -   | dB   |
| DC Port Isolation              | -               | 0.003                   | 1                       | -   | 50  | -   | dB   |
| DC Resistance                  | -               | -                       | -                       | -   | 0.3 | -   | Ω    |
| Inductance                     | -               | -                       | -                       | -   | 4.7 | -   | μH   |
| Insertion Loss                 | -               | 0.003                   | 0.01                    | -   | 2   | -   | dB   |
| Insertion Loss                 | -               | 0.01                    | 50                      | -   | 1.5 | 2.5 | dB   |
| Return Loss                    | -               | 0.003                   | 50                      | -   | 13  | -   | dB   |
| Risetime/Falltime <sub>1</sub> | -               | -                       | -                       | -   | 10  | -   | ps   |




<sup>[1]</sup> Specified as 90%/10%. Calculated from  $\tau_{bt}^2 = (\tau_{out}^2 - \tau_{in}^2)$

## Typical Performance Plots

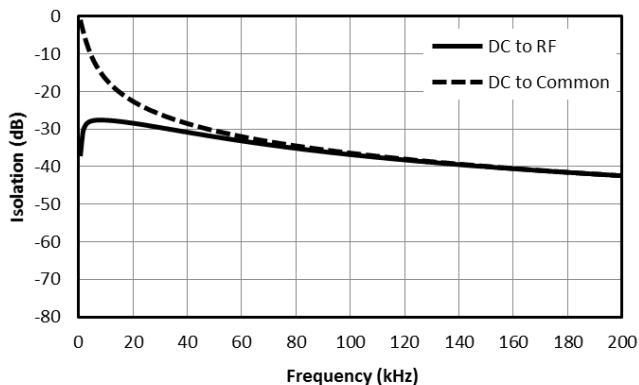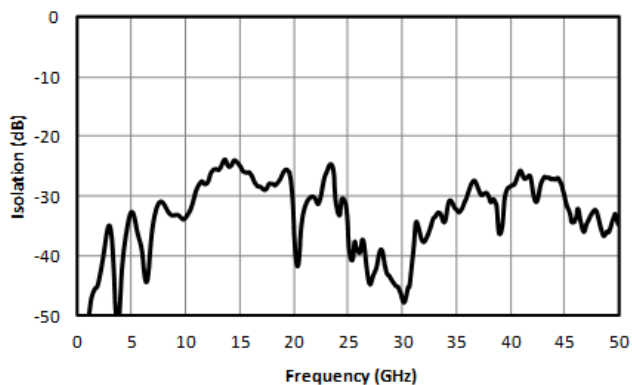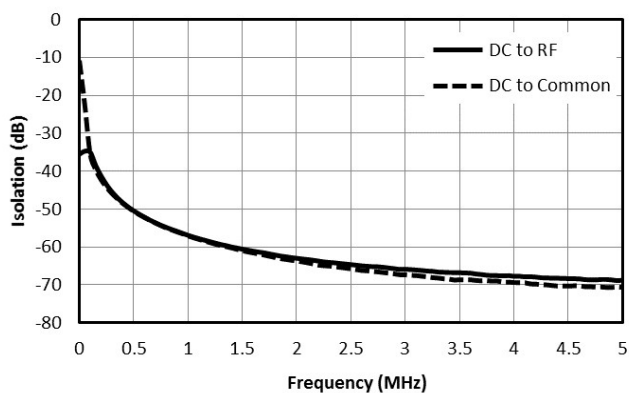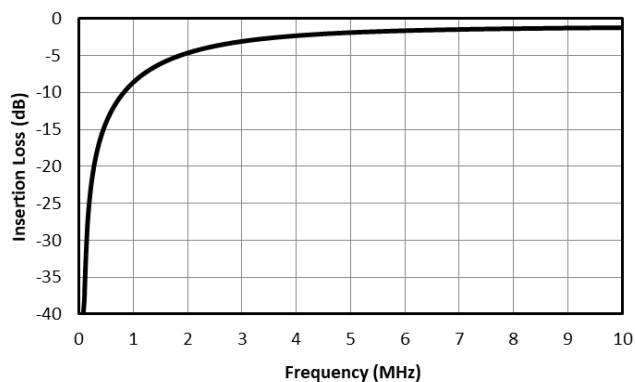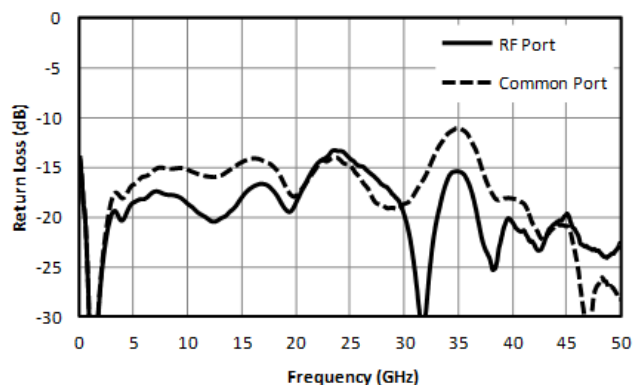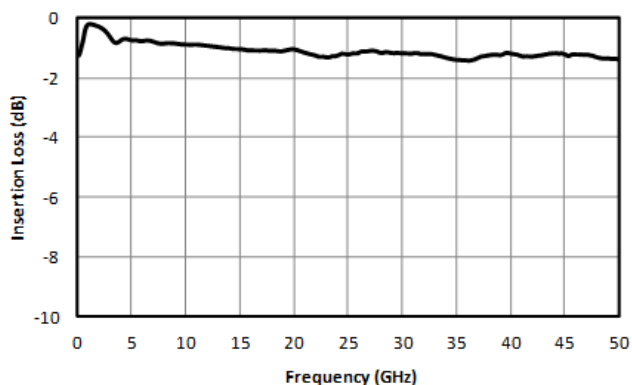


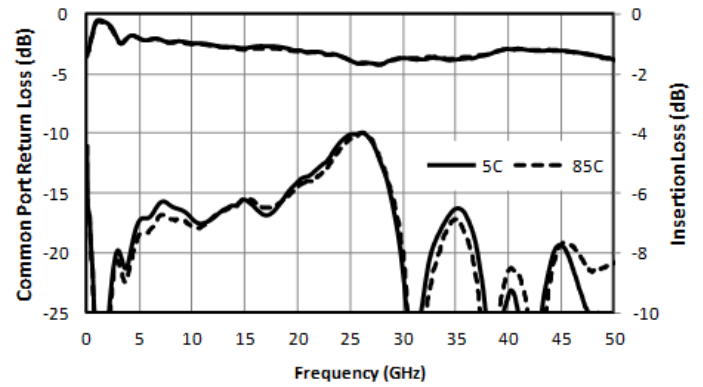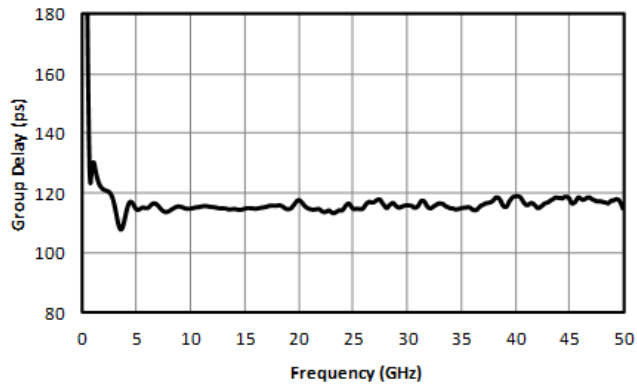


### Typical Performance vs Bias Current at Low frequencies

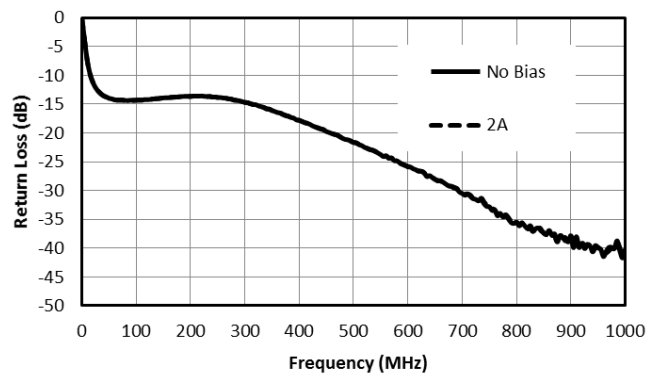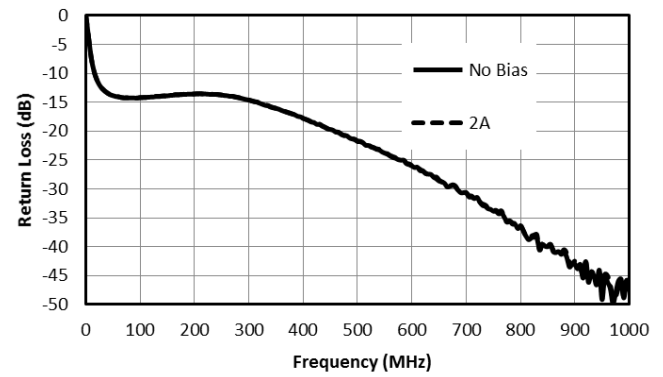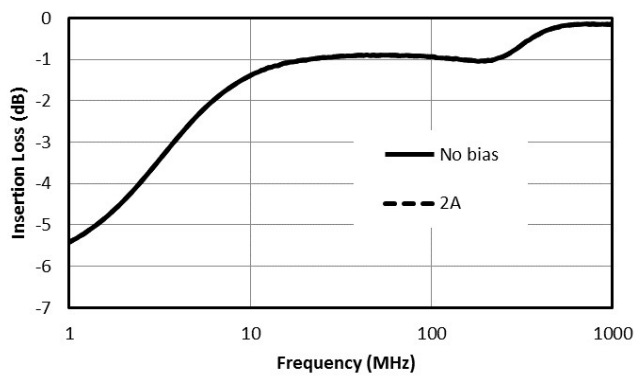

## Time Domain Performance Plot

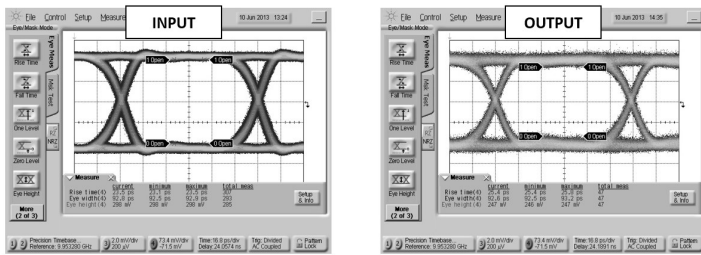

## Application Information

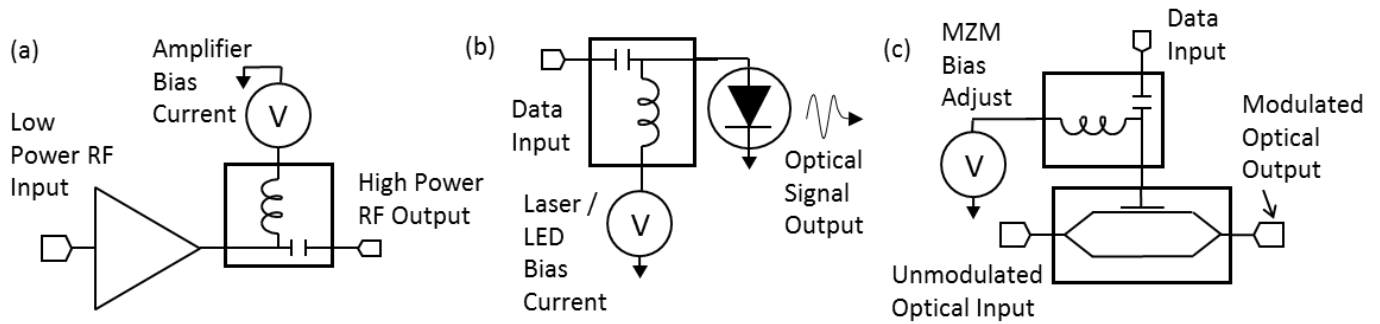

Example Schematics of a) Broadband Microwave Amplifier Biasing, b) Laser/LED Biasing for Data Communication and c) Mach-Zender Modulator Biasing for Data Communication



#### **DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020, Marki Microwave, Inc