

Balun Transformers

Description

The 3A625 is a low profile balanced to unbalanced transformer in an easy to use surface mount package covering W-LAN and MMDS push-pull amplifier applications. The 3A625 has an unbalanced impedance of 50Ω and balanced port impedances of 25Ω to ground with 50Ω balance between outputs. This eases the matching of the push-pull amplifier's power transistors which have low impedance levels. The output ports have equal amplitude (-3dB) with 180° phase differential.



Features


- 2.3 - 2.7 GHz
- Low Insertion Loss
- High Power
- Even Order Suppression
- Input to Output DC Isolation
- Surface Mountable
- Tape And Reel
- Convenient Package

Electrical Specifications

Frequency GHz	Port Impedance Unbalanced	Port Impedance Balanced to Ground
2.3 - 2.7	50Ω	25Ω
Return Loss dB Min	Amplitude Bal. dB (p-p)	Phase Balance degrees
15	0.40	180 ± 5.0
Insertion Loss dB Max	Θ _{JC} °C/diss. Watt	Power Watts Ave/CW
0.35	15.8	150

Specifications subject to change without notice.

Outline Drawing

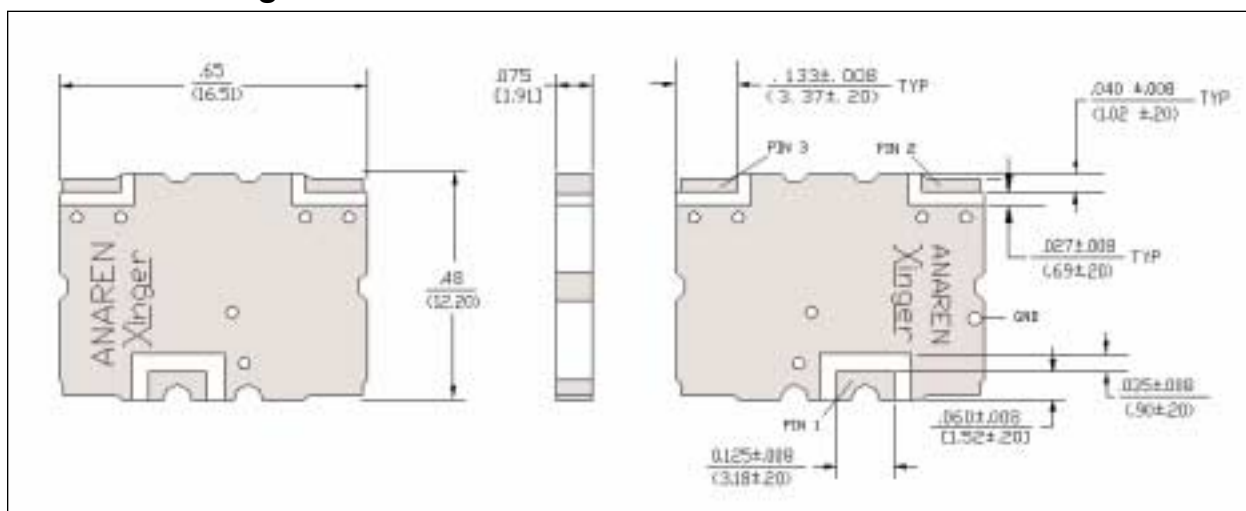

Available on Tape and Reel for Pick and Place Manufacturing.


Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369

Model 3A625


Anaren

Xinger®


Typical Performance

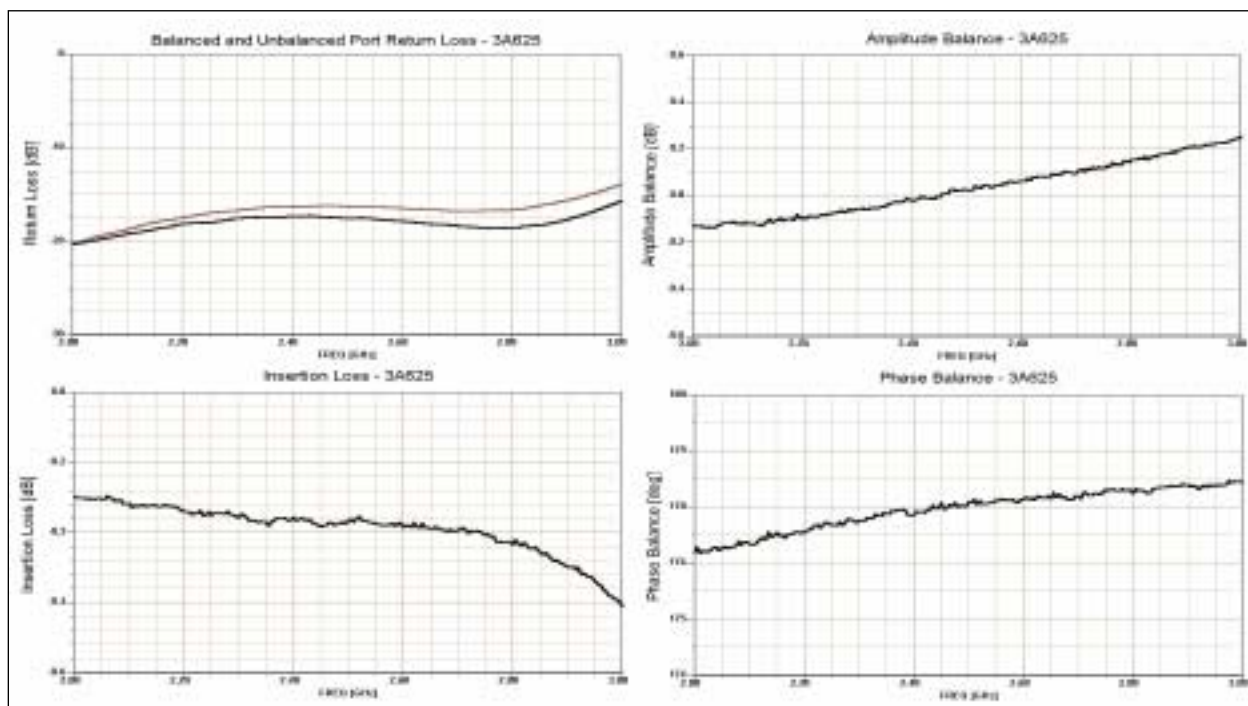

Pin Configuration

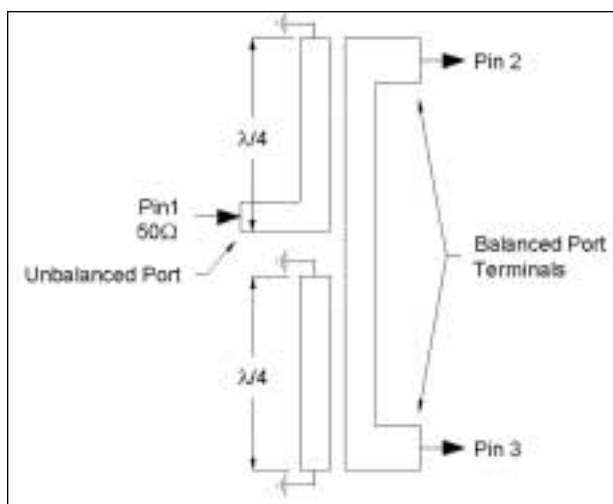

Mounting Footprint

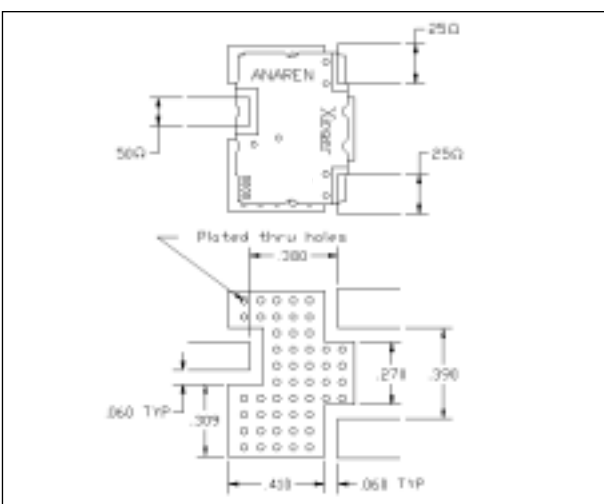

Available on Tape and Reel for Pick and Place Manufacturing.



Anaren

What'll we think of next?™

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369