


Power Dividers 4-Way

Applications

- Phased Arrays
- Antenna Feed Networks
- Image Reject Mixers
- Test Systems
- LO Power Dividers

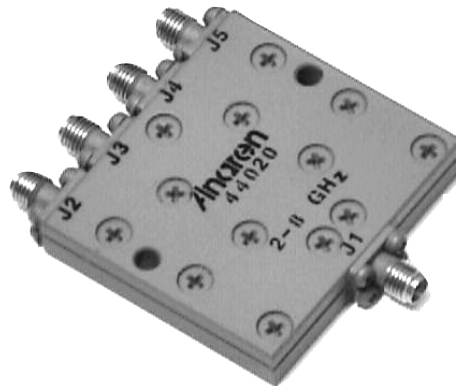

Features

- Military Grade
- 4-Way Power Split
- In-phase
- Connectors Per MIL-C-39012
- Rugged Aluminum Housing
- Low VSWR


Electrical Specifications

	Frequency GHz	Isolation dB Min	Insert. Loss dB Max	VSWR Max In/Out : 1
Split Specs	2.0 - 6.0	16	1.00	1.55/1.45
	6.0 - 8.0		1.20	
	Amp. Bal. dB Max	Phase Bal. Degrees Max	Connector	Power Ave. CW Watts
Split Specs	0.60	6	SMA	17

Notes:*Input power with load VSWR of 1.20:1. Impedance: 50 ohms nominal. Meets MIL-E-5400 Class II requirements. Additional screening available for military and space applications.

Electrical and Mechanical Specifications subject to change without notice.

Outline Drawing

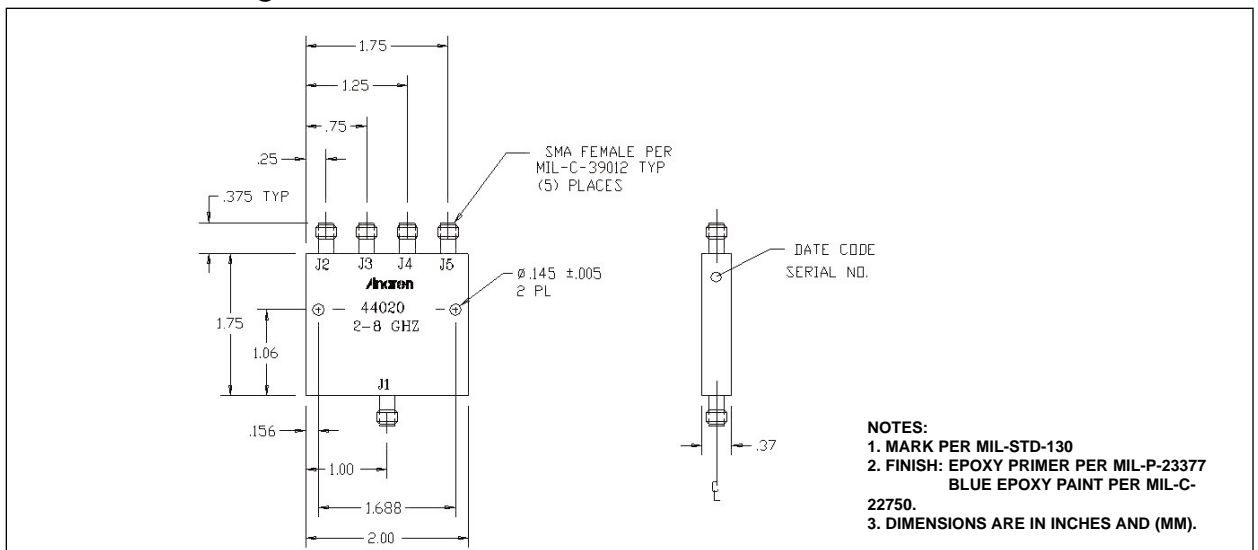

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369