

### Connectorized Splitter/Combiner

5-Way



#### Features


- 800 - 1000 MHz
- High Power Handling
- Low Insertion Loss
- Easy Mounting
- Cost Effective Networks
- SMA Connectors

#### Electrical Specifications

Frequency MHz	Isolation Between Ports dB Min	Insert. Loss dB Max
800 - 1000	25	0.35
VSWR Max : 1	Amp. Bal. dB Max	Termination Power Rating Watts Avg.
1.20	±0.30	15

Specifications Subject to Change Without Notice

#### Outline Drawing

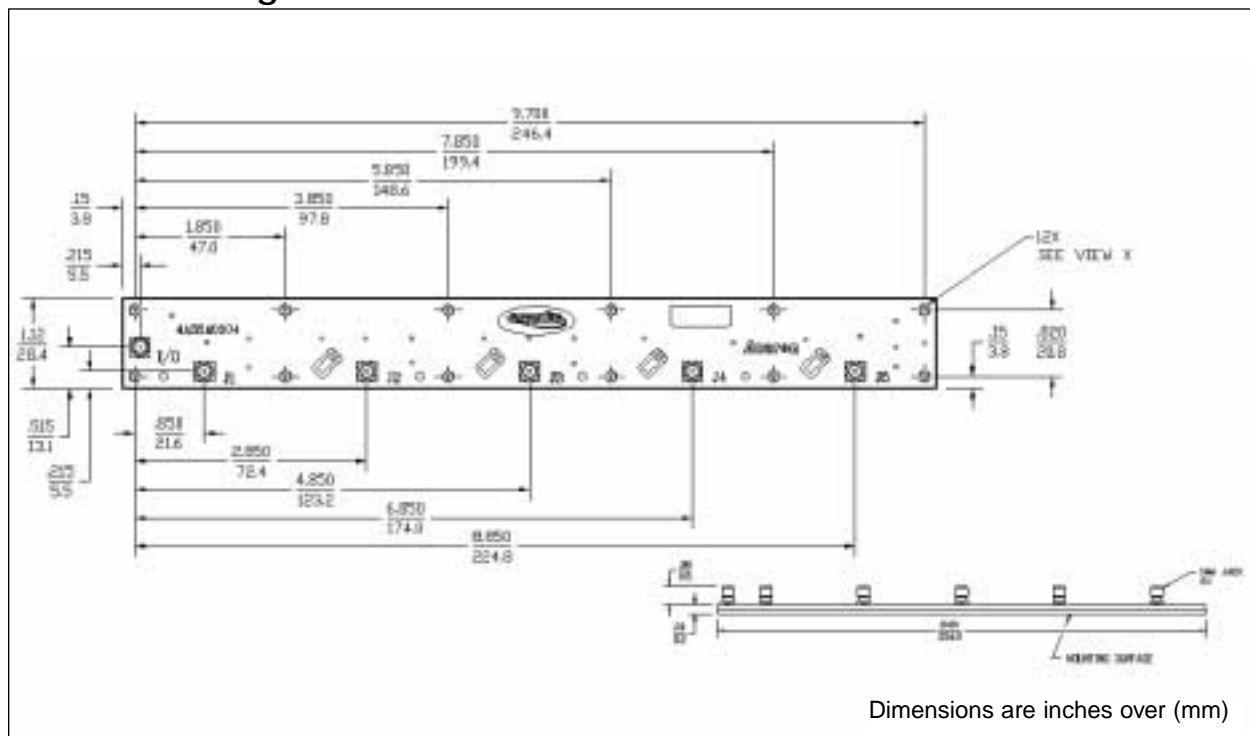

# Model 4ASSA0504



## Typical Performance

