



TWO-TONE-TERMINATOR MIXER/LO-AMPLIFIER

T3A-4

The T3A-4 is a broadband Two-Tone-Terminator mixer integrated with a single positive-bias only LO buffer amplifier. Easy-to-use and cost effective for your commercial mixer needs.



Features

- High Two-Tone Intercept for low LO Drive
- Integrated LO Buffer Amplifier
- LO/RF 10 to 4000 MHz
- IF 1 to 4000 MHz
- 6.5 dB Typical Conversion Loss
- Ultra-Broadband RF, LO, and IF
- *Positive-Bias Only Required*

Electrical Specifications - Specifications guaranteed from -30 to +70°C, measured in a 50Ω system.

Parameter	LO (MHz)	RF (MHz)	IF (MHz)	Min	Typ	Max
Conversion Loss (dB)	10-4000 10-4000	10-4000 10-4000	1-500 1-4000		6.5 7.5	8.0 9.5
LO Drive Level (dBm)				-5		+5
LO Leakage (dBm)						
LO-RF	10-4000	10-4000			-7	
LO-IF	10-4000	10-4000			-7	
RF-IF Isolation (dB)	10-4000	10-4000			25	
Input 1 dB Compression (dBm)	10-4000	10-4000			+16	+15
Input Two-Tone Third Order Intercept Point (dBm)	10-4000	10-4000			+25 to +30	
Bias Requirements (mA) ¹ +5.0 Volts DC					120	180

¹Positive-bias only required.

Part Number Options

Please specify diode level and package style by adding to model number.	
Package Style(s) ^{1,2}	Example
UZ , UZP	T3A-4 UZP

¹Connectorized test fixtures available for most carrier and surface mount packages. Consult factory.

²For non-connectorized packages, specify I-port configuration by adding -1 or -2 suffix to model number. Default is -2 configuration when not specified.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com








TWO-TONE-TERMINATOR MIXER/LO-AMPLIFIER

T3A-4

Page 2

LO/RF 10 to 4000 MHz
IF 1 to 4000 MHz

Typical Performance

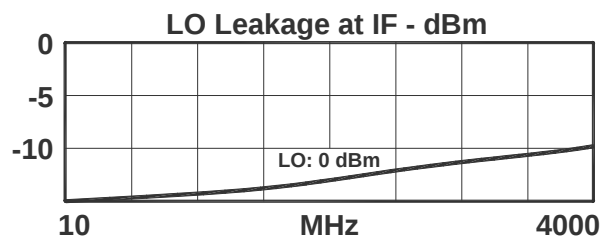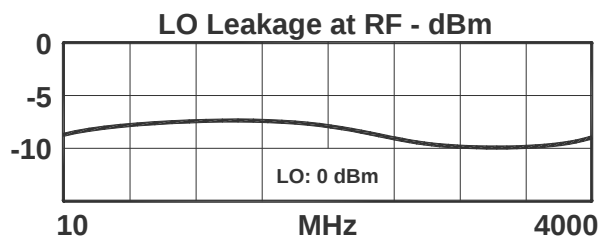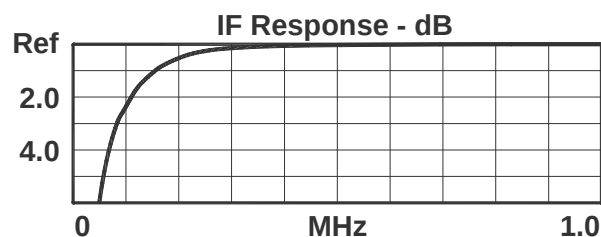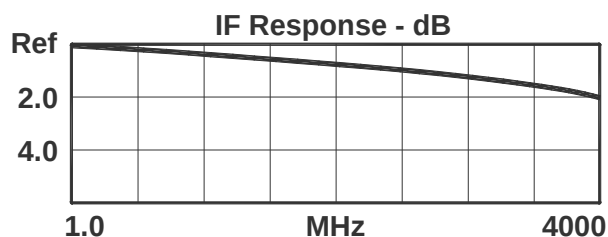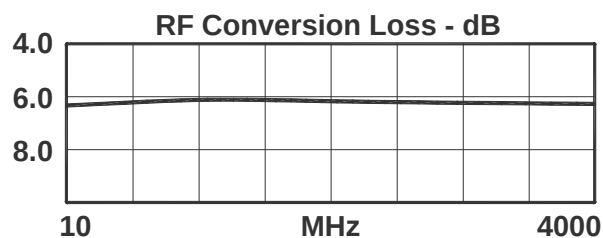

DATA SHEET NOTES:

1. Mixer Conversion Loss Plot IF frequency is 100 MHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
4. Maximum LO input power is +15 dBm.
5. Maximum RF input power is +25 dBm.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com