

Features

- Digital 2B+D telephone Set, 1km range.
- Programmable μ -law/A-law.
- Programmable Transmit and Receive Gains.
- Can comply with European or North American Handset requirements.
- Digital Handset volume control.
- DTMF tone generation complies with both North American and European Standards.
- Two Tone warbler with Digital Frequency and Level adjustment.
- Hearing aid compatible handset

ISSUE1

April 1996

Ordering Information

9118-000-601-NA	SS601+ (Arctic Grey)
9118-502-601-NA	SS601+ (Charcoal Grey)



SS601+ Functionality

The SS601+ telephone operates in a stimulus fashion, which means that it must be instructed by the host system to invoke most of its functionality. To control the telephone, the system must establish link (MiLAP™) and network layer (MiNET™) communication via the D-channel. Once this communication is established, the system has control of the audio paths, tone generation and display functions in the telephone. The telephone in turn reports key depressions and certain other messages related to volume control and display states. The MiLAP and MiNET specifications, MTS21 and MTS22, describe this functionality in detail.

Certain functions are handled directly in the SS601+, once communication has been established. These are DTMF tone generation; when dial pad keys are used; and volume control operation. The volume control keys affect the handset receive level when the handset audio is enabled (+/-6dB in 3dB steps) and affect the ringer level when the ringer is enabled (+/-12dB in 4dB steps). In the case of the handset volume control the level normally returns to nominal after the handset audio path is disabled; however this feature can be disabled via a MiNET command. For the other control functions the resulting setting is maintained and reported to the system via MiNET commands. An additional local function in the SS601+, that is not included in other SS600 sets, is the storage of speed dial digits, this functionality is described in the Mitel technical note TN12.

Note: The SS601+ incorporates OEM command codes and will not function with Mitel PBX's. This product, its specifications, and the information appearing in this document are subject to change without notice.

The SS601+ meets the Electromagnetic Compatibility (Emissions) requirements of FCC Part 15 for Class B devices. The SS601+ also meets the emissions and Immunity requirements of the European Community Directive 89/336/EEC for class B and Severity level 2. The SS601+ is designed only for use with on-premise wiring.

Detailed Operation Description

The detailed functionality of the SS601+ is described in the Mitel Technical Note TN.124 and in the MTS21 and MTS22 protocol specifications. These documents are available only to licensees of the MiLAP and MiNET protocols.

Mitel SUPERSET™ 601+

Environmental Specifications

Specification	Min	Max	Units
Storage Temperature Range	-25	+70	C
Operating Temperature	0	+50	C
Storage/Operating Humidity (non-condensing)	0	90	%

Power

	Specification	Min	Typ	Max	Units	Notes
1	Input Voltage range (power up)	35		56.5	Vdc	1
2	Input Voltage Range (operational)	17		56.5	Vdc	2
3	Idle Set Power		200	260	mW	3
4	Maximum Set Power		510	640	mW	4

Notes:

1. Open circuit voltage required to start up the set's power supply, 150uF of capacitance must be charged to the minimum voltage.
2. Voltage required at the telephone set to maintain operation
3. Telephone set operational, but no call active
4. Call Ringing with Ringer Volume control adjusted to Maximum

AC Line Transmission

	Specification	Min	Typ	Max	Units	Notes
1	Input Voltage	0.3		1.25	Vpp	5, 6
2	Output Voltage	0.8	1.1	1.2	Vpp	5
3	Transmission Loop Length	0		1	Km	6, 7

Notes:

5. Measured at the telephone set using termination circuit from MTS23 (Mitel DNIC Interface Spec.)
6. 26 AWG twisted pair wire, Attenuation = -11.5dB/Km
7. Loop length can also be limited by the power feed arrangement, see Power Feed information in MTS23

Handset Transmission (Acoustic to Digital, Digital to Acoustic)

	Specification	Min	Typ	Max	Units	Notes
1	Transmit Loudness, TOLR (ulaw)	-38	-41	-44	dB	8, 10
2	Transmit Sensitivity (ulaw) @1kHz	-31	-26	-21	dBv	8, 10
3	Transmit Loudness, SLR (Alaw)	9	6	3	dB	9, 10
4	Transmit Sensitivity (Alaw) @1kHz	-22	-17	-12	dBv	9, 10
5	Receive Loudness, ROLR (ulaw)	50	47	44	dB	8, 11
6	Receive Efficiency (ulaw) @1kHz	-8	-3	2	dBPa	8, 11
7	Receive Loudness, RLR (Alaw)	1	-2	-5	dB	9, 11
8	Receive Efficiency (Alaw) @1kHz	-9	-4	1	dBPa	9, 11
9	Local Sidetone Loudness, SOLR (ulaw)	14.5	9.5	4.5	dB	8
10	Local Sidetone Loudness, STMR (Alaw)	24	18	12	dB	9

Notes:

8. Ulaw half-channel parameters are measured and calculated according to the methods in IEEE Std.269 and 661, receive electrical input is -10dBv.
9. Alaw half-channel parameters are measured and calculated according to the methods in ITU rec. P.64, P.79, receive electrical input is -12dBv.
10. The Transmit levels can be made louder in 1dB increments up to 7dB, via the Minet command Set Codec Gain, see MTS22.
11. The Receive loudness can be made quieter in 1dB increments up to 7dB, via the Minet command Set Codec Gain, see MTS22. The receive loudness can also be adjusted +/- 6dB, in 3dB steps via the volume control keybuttons.

The SS601+ handset is designed to meet the Peak acoustic pressure requirements of EIA/TIA-470-A and the Hearing Aid compatibility requirements of EIA/TIA-504.

DTMF Transmission

	Specification	Min	Typ	Max	Units	Notes
1	Total Output Level (ulaw)	-4.5	-4	-3.5	dBm0	12
2	Total Output Level (Alaw)	-10.5	-10	-9.5	dBm0	12
3	Pre-twist	1.5	2	2.5	dB	12
4	Frequencies	-1.5	standard	+1.5	%	12

Notes:

12. Measured on a B-channel, applicable to all 12 of the standard tone pairs.

Ringer Level

	Specification	Min	Typ	Units	Notes
1	Maximum Ringer Sound Power	80	86	dBa	13, 14

Notes:

13. Measured according to the methods described in EIA/TIA-470-A, at all frequency combinations.
14. The ringer level can be adjusted down 24dB, in 4dB steps via the volume control keybuttons.

Mitel SUPERSET™ 601+

The ringer frequencies can be adjusted via the volume control keys when the set has been put into the ringer demo mode via the MiNet command Define Audio Mode, see MTS 22. In the SS601+ the following ringer frequency combinations are available.

Ringer Frequency Pairs

High Tone	Low Tone	Warble Rate	Units
364	444	5 or 10	Hz
400	615	5 or 10	Hz
444	666	5 or 10	Hz
471	727	5 or 10	Hz

SS601+ Functional Parameters

	Parameter	Value	Remarks
Physical Layer	Sync Debounce time	150 ms	Time to detect or lose sync once DNIC programmed.
	GoAhead Protocol Support	YES	GoAhead and NonGoAhead modes supported - see MTS20.
Link Layer	Link Address Used	\$00	As specified in MTS21.
	T200	600 ms	Re-transmission time - refer to MTS21
	N200	7	Number of re-transmissions before link reset - refer to MTS21
	Transmit Window Size	1	Maximum number of outstanding I frames (k) at any time for each particular direction - refer to MTS21.
	Receive Window Size	1	
Network Layer	Set ID Used	92*	The octet reported in the Report SetID MT - refer to MTS22.
	Max. Transmit Iframe Size	12	Send Key (\$05) is the largest transmitted packet -see MTS22.
	Max. Receive Iframe Size	6	Local Programmable Key Control - See MTS22
	Bundling Support	NO	Minet frames <u>cannot</u> be bundled together to the SS601+.

*Note: Hexadecimal

SS601+ MiNET Key Code Assignments

Key Name	Upstroke Codes	Downstroke Codes
0	0 x 23	not reported
1	0 x 19	not reported
2	0 x 1A	not reported
3	0x 1B	not reported
4	0 x 1C	not reported
5	0 x 1D	not reported
6	0 x 1E	not reported
7	0 x 1F	not reported
8	0 x 20	not reported
9	0 x 21	not reported
*	0 x 22	not reported
#	0 x 24	not reported
Hookswitch	0 x 00	0 x 40
Message	0 x 18	0 x 58
Flash	0 x 16	0 x 56
Hold/Retrieve	0 x 0D	0 X 4D
Volume/Tone ↑	0 x 11	0 x 51
Volume/Tone ↓	0 x 10	0 x 51
Programmable Key #1	0 x 01	0 x 41
Programmable Key #2	0 x 02	0x 42
Programmable Key #3	0 x 03	0 x 43
Programmable Key #4	0 x 04	0 x 44
Programmable Key #5	0 x 05	0 x 45
Programmable Key #6	0 x 06	0 x 46
Program Key	not reported	not reported

SS600 Family Feature Summary


	SS601+	SS610	SS620	SS622	SS630
Keybuttons	23	28	37	30	38
LCD Indicators	-	6	12	30	12
LED Indicators	2	2	2	-	2
Alphanumeric Display	-	-	2x16	-	4x40
Soft-keys	-	-	3	-	6
Speakerphone	-	Yes	Yes	-	Yes
MiNET ID Code	92*	93*	94*	96*	95*
PKM Expansion Jack	-	Yes	Yes	-	Yes

* Hexidecimal

"This product is intended to be a peripheral device to commercial network connecting equipment and has been designed to be in compliance with the applicable sections of the current US regulatory requirements and standards listed below:

- FCC Part 68 rules for terminal connection requirements to the public switched telephone network.
- FCC Part 15 Subpart B, regulations specifying limits for electromagnetic emissions of digital apparatus.
- UL/ANSI 1459 Second Edition specifying product safety requirements for telephone equipment.

REGULATORY APPROVAL IS DEPENDENT UPON THE HOST SYSTEM AND THE METHOD BY WHICH THE SET IS CONNECTED AND IS THE RESPONSIBILITY OF THE LICENSEE."

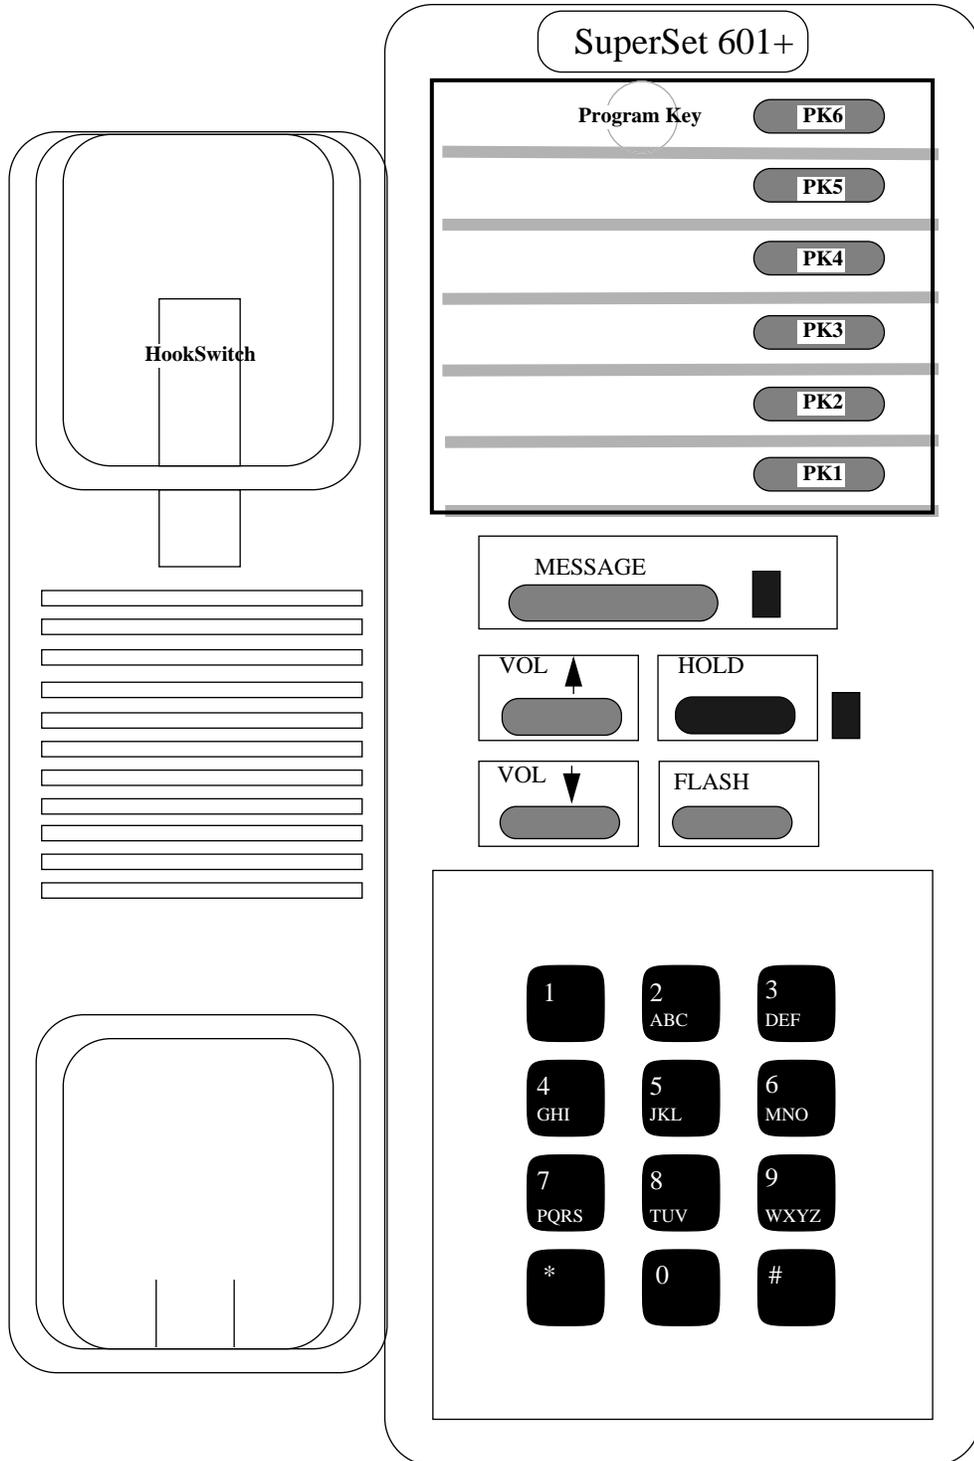

Note: The Program Key can be found underneath the clear plastic lens

Figure 1: SS601+ Key Layout

Mitel SUPERSET™ 601+

Information relating to products and circuits ("Product") furnished herein by Mitel Corporation or its subsidiaries ("Mitel") is believed to be reliable. However, Mitel assumes no liability for errors that may appear in this document, or for liability otherwise arising from the application or use of any such information or Product or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or the purchase of Product conveys any license, either expressed or implied, under patents or other intellectual property rights owned by Mitel or licensed from third parties by Mitel, whatsoever. Purchasers of Product are also hereby notified that the use of Product in certain ways or in combination with Mitel or non-Mitel furnished goods or services may infringe patents or other intellectual property rights owned by Mitel. The Products, their specifications and the information appearing in the document are subject to change by Mitel without notice.

For more information write or phone the leaders in CMOS technology, MITEL Semiconductor:

CANADA	Ontario	Mitel Semiconductor 360 Legget Drive, P.O. Box 13089, Kanata, Ontario, Canada K2K 1X3 Telephone: (613) 592-2122, Fax: (613) 592-6909 Internet address: http://www.semicon.mitel.com/
UNITED STATES	Florida	Mitel Semiconductor 2255 Crescent Drive, Mount Dora, Florida, USA 32757 Telephone: (904) 383-8877, Fax: (904) 383-8822
	Texas	Mitel Inc., Semiconductor Division, 4000 Old Orchard Drive, Plano, Texas, USA 75023 Telephone: (214) 509-2082, Internet: hankhood@aol.com
EUROPE	United Kingdom	Mitel Telecom Ltd. Semiconductor Division, Mitel Business Park, Gwent, Wales, NP6 4YR Telephone: (44) 1291-430000, Fax: (44) 1291-436389
	Germany	Mitel Telecom Ltd. Fabrikstrasse 17, D-70794 Filderstadt 4, Germany Telephone: (49) 711-7701-522, Fax: (49) 711-7701-524
ASIA/PACIFIC	Japan	Mitel Semiconductor Shin-Yokohama Daini Center, Bldg 10F, 3-19-5 Shin-Yokohama, Kohoku-ku, Yokohama 222 Telephone: (81)45-471-0403, Fax: (81) 45-471-0408
	Singapore	Mitel Semiconductor 300 Beach Road, #25-05 The Concourse, Singapore 199555 Telephone: (65) 293-5312, Fax: (65) 293-8527

Mitel Semiconductor is an ISO 9001/2 Registered Company

M Mitel (design) and ST-BUS are registered trademarks of MITEL Corporation

Copyright 1996 MITEL Corporation
All Rights Reserved
Printed in Canada