


Package Number 157 - 8-Lead, Ceramic Side Braid DIP, .300 Wide

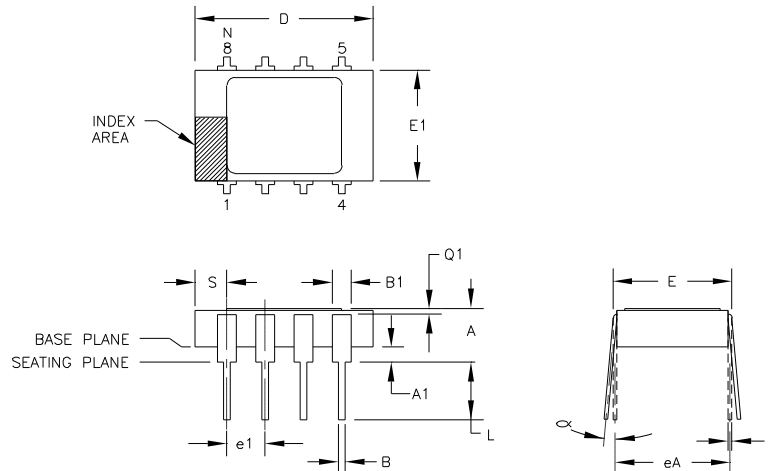

DIM	INCHES		MILLIMETERS		N
	MIN.	MAX.	MIN.	MAX.	
A	.105	.175	2.67	4.45	
A1	.025	.055	0.64	1.40	
B	.015	.021	0.38	0.53	5
B1	.038	.060	0.97	1.52	5
C	.008	.012	0.20	0.30	
D	.380	.550	9.65	13.97	
E	.290	.325	7.37	8.26	
E1	.280	.310	7.11	7.87	6
e1	.100	TYP.	2.54	TYP.	2
eA	.300	TYP.	7.62	TYP.	2
L	.125	.175	3.18	4.45	
N	8		8		4
Q1	.010	--	2.54	--	
S	.030	.120	0.76	3.05	

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.
2. LEADS WITHIN .005 IN. (0.13mm) RADIUS OF TRUE POSITION (TP) AT GAUGE PLANE WITH MAXIMUM MATERIAL CONDITION AND UNIT INSTALLED.
3. α APPLIES TO SPREAD LEADS PRIOR TO INSTALLATION.
4. N IS THE NUMBER OF TERMINAL POSITIONS.

5. OUTLINES ON WHICH THE SEATING PLANE IS COINCIDENT WITH THE PLANE ($A1 = 0$), TERMINALS LEAD STANDOFFS ARE NOT REQUIRED, AND B1 MAY EQUAL B ALONG ANY PART OF THE LEAD ABOVE THE SEATING/BASE PLANE.
6. E1 DOES NOT INCLUDE PARTICLES OF PACKING MATERIALS.
7. CONTROLLING DIMENSION: INCH.
8. A VISUAL INDEX FEATURE MUST BE LOCATED WITHIN THE CROSS-HATCHED AREA.

PACKAGE NUMBER: ZZ157 REV.: C
JEDEC NUMBER: MO-36-AA