


Package Number 325 - 5-Lead DD PAK

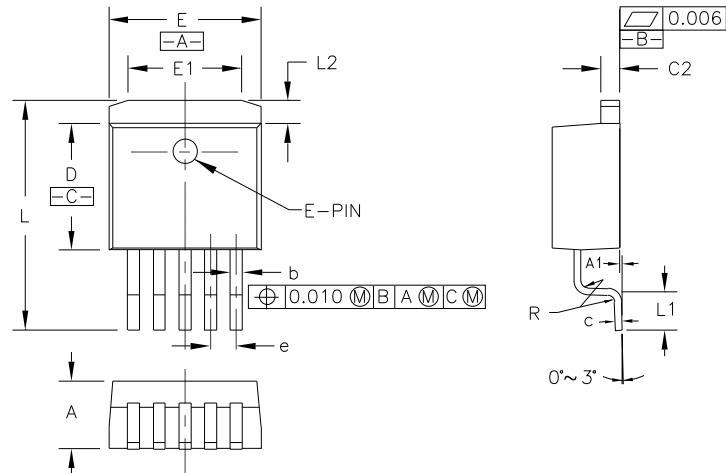

DIM	INCHES		MILLIMETERS		N
	MIN.	MAX.	MIN.	MAX.	
A	.170	.183	4.32	4.65	
A1	.000	.004	0.00	0.10	
b	.026	.037	0.66	0.94	
C2	.045	.055	1.14	1.40	
c	.014	.026	0.36	0.66	
D	.310	.350	7.87	8.89	
E	.385	.410	9.78	10.41	
E1	.297	.303	7.54	7.70	
e	.067	REF	1.70	REF	
L	.595	.605	15.11	15.37	
L1	.096	.104	2.44	2.64	
L2	.0585	.0625	1.485	1.587	
N	5		5		
R	.017	.019	0.43	0.48	

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14, 5M-1982.
2. DIMENSION b AND c APPLY TO THE PLATED LEAD.
3. LEADS ARE NOT ALLOWED ABOVE THE DATUM -B-. STAND-OFF HEIGHT IS MEASURED FROM LEAD TIP WITH REFERENCE TO DATUM -B-.
4. DIMENSION "b" DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED THE MAXIMUM "b" BY MORE THAN .003".

5. "N" IS THE NUMBER OF TERMINAL POSITIONS.

PACKAGE NUMBER: ZZ325	REV.: C
JEDEC NUMBER: MO-169	
WITH THE EXCEPTION OF DIM. D,L,L1,L2	