


The E717-74 is a compact D type socket assembly designed for 28 mm (1-1/8 inch) diameter side-on photomultiplier tubes (PMT). The overall length is most short as compared to conventional type.

FEATURES

- Pin Output
- Compact and Lightweight

SPECIFICATIONS

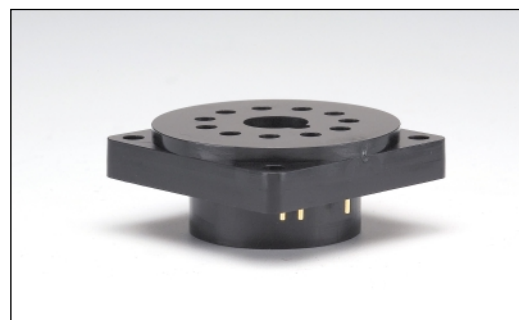

MAXIMUM RATINGS

Parameter	Description/Value	Unit
Supply Voltage between Case and Terminals	1500	V
Supply Voltage between Power Supply Terminals	-1500	V
Divider Current (at -1500 V Supply Voltage)	0.46	mA
Power Consumption (at -1500 V Supply Voltage)	682	mW
Operating Ambient Temperature	0 to +50	°C
Storage Temperature	-15 to +60	°C


CHARACTERISTICS (at 25 °C)

Parameter	Description/Value	Unit
Insulation Resistance between Case and Terminals	Min. 1×10^{11}	Ω
Leakage Current in Signal [Ⓐ]	Max. 1×10^{-10}	A
Total Voltage Divider Resistance	3.3	M Ω
Maximum Linear Output in DC Mode [Ⓑ]	22	μ A
Output Signal	DC/Pulse	—
Weight	10	g

NOTE: [Ⓐ]At -1000 V supply voltage between power supply terminals.

[Ⓑ]The current at which output of PMT deviates by ± 5 % from the linearity.

Figure 1: Circuit Diagram

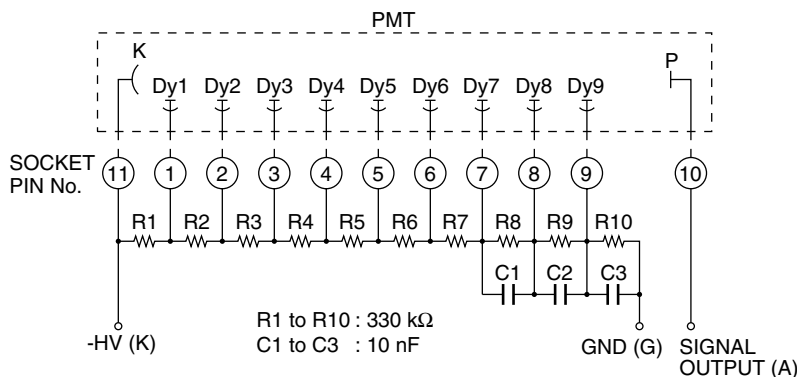

* "Wiring diagram applies when -HV is supplied."


To supply +HV, connect the pin "G" to +HV, and the pin "K" to the GND.

TACCC0134EA

COMPACT D TYPE SOCKET ASSEMBLY


E717-74

Figure 2: Dimensional Outline (Unit: mm)

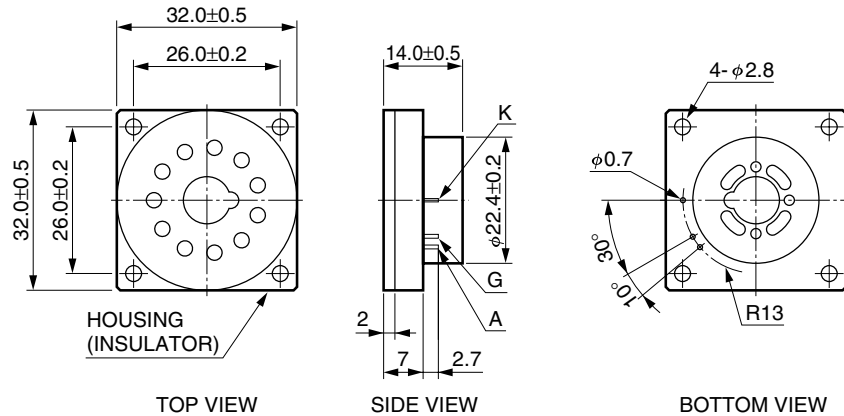

TACCA0277EA


Figure 3: Suggested Printed Circuit Board Layout (Unit: mm)

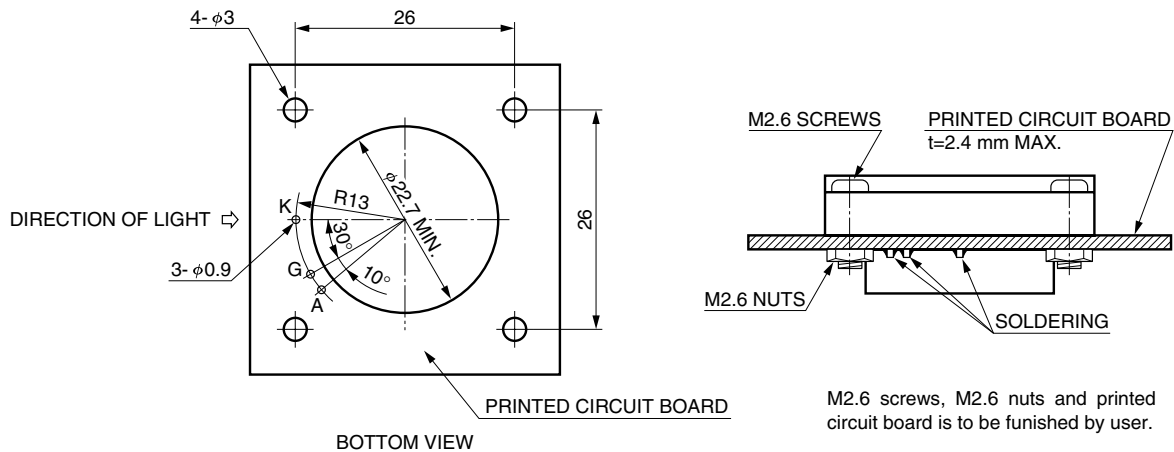

M2.6 screws, M2.6 nuts and printed circuit board is to be finished by user.

TACCC0132EA

Figure 4: Fixing the Socket to the Chassis

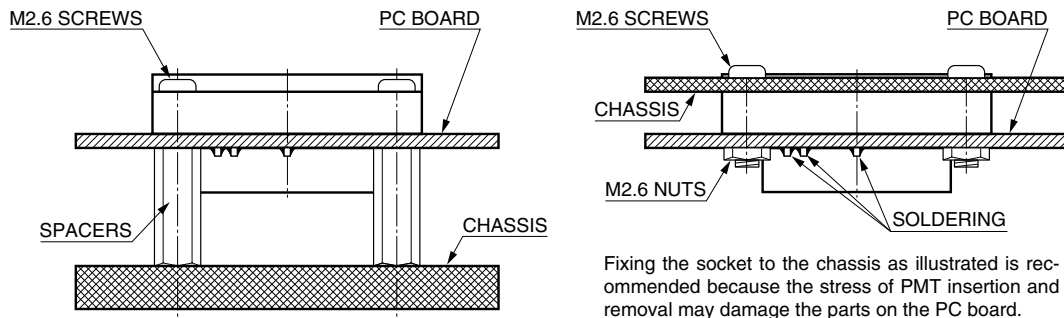

Fixing the socket to the chassis as illustrated is recommended because the stress of PMT insertion and removal may damage the parts on the PC board.

TACCC0133EA

HAMAMATSU

WEB SITE www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: info@hamamatsu.it

TACC1037E01
JUN. 2006. IP