



KNOWLES AEC-Q100/Q103 QUALIFIED MEMS
MICROPHONES FOR AUTOMOTIVE
APPLICATIONS SELECTION GUIDE

MARCH 2023

INTRODUCTION

Knowles is the world leader in MEMS microphones and has shipped 20 billion units to date. Knowles' automotive microphones are engineered to a higher standard of quality and supply assurance to support the increasing demands of the automotive market for hands-free calling, advanced voice assistance and in-cabin noise cancellation for passenger comfort.

The launch of the latest microphones marks Knowles' further commitment to the automotive market, building on its industry-leading high quality and innovation standards. The microphones follow the AEC-Q100/103 qualification requirements set by the [Automotive Electronics Council](#), the standardization body for establishing standards for reliable, high-quality electronic components for use in the harsh automotive environment.

Let us help you choose the right microphone for your project.



Scale + Supply
5-Yr Supply Warranty



Support
Field Quality for Auto



Technology
Turnkey Provider



Quality
AEC-Q100/103

AUTOMOTIVE CHALLENGES AND SOLUTIONS NEEDED

	CUSTOMER CHALLENGES	SOLUTION	IMPACT ON MIC SPECS
COMMUNICATION	Hands Free Communication, Phone calls	Beamforming (x2-x8 mics)	High SNR, maximum linearity (<1%) even in loud environment for effective algorithm operation
	Emergency Call	Temp/humidity robustness	MEMS Reliability /Robustness to variations
	Voice-Enabled User Interface / Conversational AI	Voice Wake / Barge-In	High SNR, Close to speaker --> High AOP
PASSENGER COMFORT	Cancel Engine/Road Noise	Active Noise Cancellation (ANC)	ANC --> Low Latency and low LFRO
	In-cabin Intercom (SUV/MiniVan)	Beamforming (x2-x8 mics)	High SNR, maximum linearity (<1%) even in loud environment for effective algorithm operation
	In-cabin presence detection	Ultrasonic Response	Wideband / Ultrasonic response
ADVANCED FEATURES	Parking Assist	Ultrasonic Response	Wideband / Ultrasonic response
	Smart tires	Temp / humidity robustness	Stability at high temp / high humidity, high pressure robustness
	Listening to car surrounding / Siren detection	Waterproof exterior mic module	Environmental robustness, high AOP
	Retrofit ECM with MEMS	Replace with MEMS module	Small package size

Emerging use cases like Voice UI, E-Call, ANC are driving new solutions and new mic requirements

MICROPHONE TECHNOLOGIES

SOLUTIONS	IMPACT OF MIC SPECS	MEMS	ECM	
Beamforming	LFRO Variation / Phase Matching	✓		- ECM sensitive to temperature and humidity over time - Voice mic in head unit → Small size important MEMS footprint smaller than ECM - Vibration in ECM affects acoustic output
	Environmental Stability - Temp/Humidity	✓		
	Multiple Mics → Smaller Footprint	✓		
	Insensitive to Vibration/Shock	✓		
Active Noise Cancellation	Low Latency / LFRO	✓	✓	- MEMS offers more consistent acoustics - Phase response tighter for MEMS
	LFRO Variation / Phase Matching	✓		
Barge-In/E-Call	High AOP	✓		
System Flexibility	Digital Interface → Lower Noise, Ease of Layout, Multi-Mics	✓		
Manufacturing Ease	Auto pick and place, surface mountable	✓		

MEMS mics are robust, reliable and offer several features ideally suited to solve acoustic automotive challenges

CHOOSING THE RIGHT MICROPHONE

SIGNAL TO NOISE RATIO

For far field applications, high SNR microphones result in superior audio pickup. ANC and transparency mode features in TWS need high SNR microphones for better user experience. When comparing analog to PDM microphones, reduce the analog SNR by -1.5dB to account for the external ADC's noise contribution.

ACOUSTIC OVERLOAD POINT (AOP) AND 1% THD

The AOP is the sound pressure level at 1kHz at which the total harmonic distortion is 10%. At this point, audio is heavily clipped and sounds very distorted. Microphones require a high AOP spec if they are subject to high sound levels (eg. close to loudspeakers

or outdoor applications exposed to wind noise). Maximum linearity (<1% THD), even in loud environments benefits effective operation of algorithms including beam forming.

SENSITIVITY OF PDM MICROPHONES

Sensitivity of microphones is the reference output for 94dB SPL sound. Higher sensitivity implies more signal for a given sound. In PDM microphones, higher sensitivity does not imply higher performance because gain can simply be applied in the digital domain by multiplying the output code. Dynamic range is a better indicator of microphone performance.

LOW FREQUENCY ROLL-OFF (LFRO)

The LFRO is the -3dB point of the frequency response with respect to the sensitivity at 1kHz. A low LFRO is advantageous for bass frequency pickup and ANC, but it is more sensitive to wind noise and low frequency overload in a feedback ANC system.


ULTRASONIC APPLICATIONS

MEMS microphones inherently have a very usable ultrasonic response from 20kHz to 80kHz or more. The output of the u/s signal must be processed by an amp, CODEC, or ADC that can extract the needed frequencies, usually by using a higher sample rate and/or lower decimation rate. Operating MEMS microphones at a high CLK rate allows increased ultrasonic bandwidth without noise penalty.


EMERGING DIGITAL ARCHITECTURES IN AUTO

Digital (PDM) microphones have an integrated ADC and return oversampled PDM data at the supplied clock frequency. Digital architectures enable transmission of digital PDM mic output data over an automotive bus such as ADI's A2B audio bus with system benefits on lower weight cables, noise immunity, and scalability.

ANALOG ARCHITECTURE

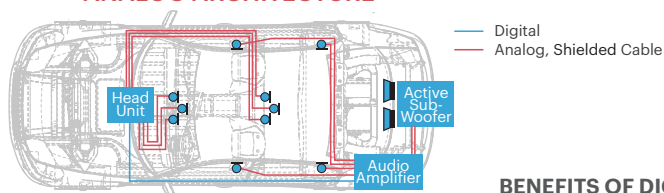


DIGITAL ARCHITECTURE

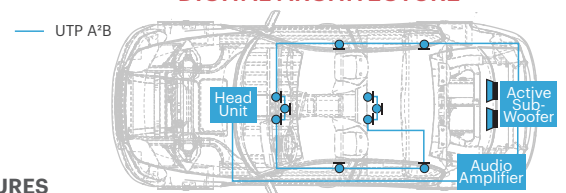

BENEFITS OF DIGITAL ARCHITECTURES

Signal susceptible to noise & EMI	Noise Immunity	Improved RF/EMI robustness
Complex design with multiple iterations	Faster Design	Easier system design with fewer iterations
Dedicated shielded cables needed w/more mics → Higher system cost, more weight	Scalability	Newer architecture like A2B scalable → Cheaper cables, fewer wires, less weight

	MICROPHONE	DESCRIPTION	SIZE	SNR 1% THD 10% THD*	LFRO	OPER. TEMP. STORAGE TEMP.	CURRENT	
DIGITAL	SPH6855LM4H-1 Samples on flex: KAS-700-0147	Automotive AEC-Q100/Q103 -35dBFS sensitivity high temperature solder	3.50 x 2.65 x 0.98mm	68 dB(A) 117 dB SPL 130 dB SPL	30Hz	-40 to +100°C -40 to +125°C	260µA @ 768kHz 1000µA @ 2.4MHz	
	SPH6655LM4H-1 Samples on flex: KAS-700-0174	Automotive AEC-Q100/Q103 -26dBFS sensitivity high temperature solder	3.50 x 2.65 x 0.98mm	68 dB(A) 117 dB SPL 121 dB SPL	30Hz	-40 to +100°C -40 to +125°C	260µA @ 768kHz 1000µA @ 2.4MHz	
	SPH9855LM4H-1 Samples on flex: KAS-700-0160	Automotive AEC-Q100/Q103 -37dBFS sensitivity ± 1dB sensitivity matching	3.50 x 2.65 x 0.98mm	66 dB(A) 130.5 dB SPL 132.5 dB SPL	25Hz	-40 to +100°C -40 to +100°C	260µA @ 768kHz 1000µA @ 2.4MHz	
	SPH9855LM4H-C Samples on flex: KAS-700-0161	Automotive AEC-Q100/Q103 -37dBFS sensitivity ± 0.5dB sensitivity matching						
	SPH8855LM4H-1 Samples on flex: KAS-700-0162	Automotive AEC-Q100/Q103 -26dBFS sensitivity high temperature solder	3.50 x 2.65 x 0.98mm	66 dB(A) 118 dB SPL 121 dB SPL	30Hz	-40 to +100°C -40 to +125°C	270µA @ 768kHz 1000µA @ 2.4MHz	
ANALOG	SPH1878LR5H-1 Samples on flex: KAS-700-0167	Automotive AEC-Q100/Q103 ± 1dB sensitivity matching	3.50 x 2.65 x 1.26mm	67 dB(A) 124 dB SPL 134 dB SPL	7Hz	-40 to +85°C -40 to +125°C	100µA @ 1.8V	
	SPH1878LR5H-C Samples on flex: KAS-700-0168	Automotive AEC-Q100/Q103 ± 0.5dB sensitivity matching					250µA @ 2.75V	
	SPH2878LR5H-1 Samples on flex: KAS-700-0168	Automotive AEC-Q100/Q103 ± 1dB sensitivity matching	3.50 x 2.65 x 1.26mm	67 dB(A) 124 dB SPL 134 dB SPL	7Hz	-40 to +105°C -40 to +125°C	100µA @ 1.8V	
	SPH2878LR5H-C Samples on flex: KAS-700-0168	Automotive AEC-Q100/Q103 ± 0.5dB sensitivity matching					250µA @ 2.75V	

* SNR AND THD SPECS APPLY TO NORMAL MODE. FOR LOW POWER MODE SPECS, REFER TO THE DATASHEET

ADDITIONAL RESOURCES

Datasheets: www.Knowles.com/SiSonic

SiSonic Design Guide: www.Knowles.com/SiSonic/Design-Guide

Evaluation kits: www.Knowles.com/SiSonic/Evaluation-Kits

Application notes: www.Knowles.com/SiSonic/Application-Notes

Automotive: www.Knowles.com/SiSonic/Automotive

DISCLAIMER

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples given herein, any typical values stated herein and/or any information regarding the application of the device, Knowles Electronics, LLC hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

INFORMATION

For further information on technology, delivery terms and conditions and prices, please contact a Knowles representative. © 2023, Knowles Electronics, LLC, Itasca, IL USA. All Rights Reserved. Knowles and the logo are trademarks of Knowles Electronics, LLC.