


AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

DEVICE OVERVIEW

General Description

The AMM-7200SM is a surface-mount amplifier suitable for use as a single tone driver or general-purpose gain block. It can drive an L or H diode mixer from 12 to 46 GHz, or S diode mixer from 14 to 40 GHz. This amplifier also has exceptionally low input and output reflections, and excellent gain flatness in-band. The AMM-7200SM is packaged in a compact 3mm QFN for surface mount integration onto printed circuit boards



[Download s-parameters here](#)


Features

- +18 dB Small Signal Gain
- +22 dBm saturated output power
- Excellent return losses
- Compact 3mm QFN package

Applications

- Mobile test and measurement equipment
- Radar and satellite communications
- 5G transceivers
- LO driver for Marki L-, H-, and S-diode mixers

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
EVAL-AMM-7200SM	Evaluation Board, 12-46 GHz GaAs Surface Mount LO Driver Amplifier	-	-	RoHS	Released	EAR99
AMM-7200SM	12-46 GHz GaAs Surface Mount LO Driver Amplifier	QFN	-	RoHS	Released	3A001.b.2.d

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

Table Of Contents

■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Recommended Operating Conditions
Functional Block Diagram	Sequencing Requirements
	Electrical Specifications
■ Port Configuration and Functions	Typical Performance Plots
Port Diagram	Typical Performance Plot of Marki MM1-1140H
Port Functions	Using AMM-7200SM as LO Driver
	Typical Performance Plot of Marki MM1-1240S
■ Revision History	Using AMM-7200SM as LO Driver
	■ Mechanical Data
	Outline Drawing
	■ Footprint Image
	■ Operation
	Application Information
	Application Circuit
	Application Circuit Description

Revision History

Revision Code	Revision Date	Comment
-	2021-05-01	Datasheet Initial Release


AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver
Amplifier

Port Configuration and Functions

Port Diagram






A port diagram of the AMM-7200SM's QFN package is shown below.

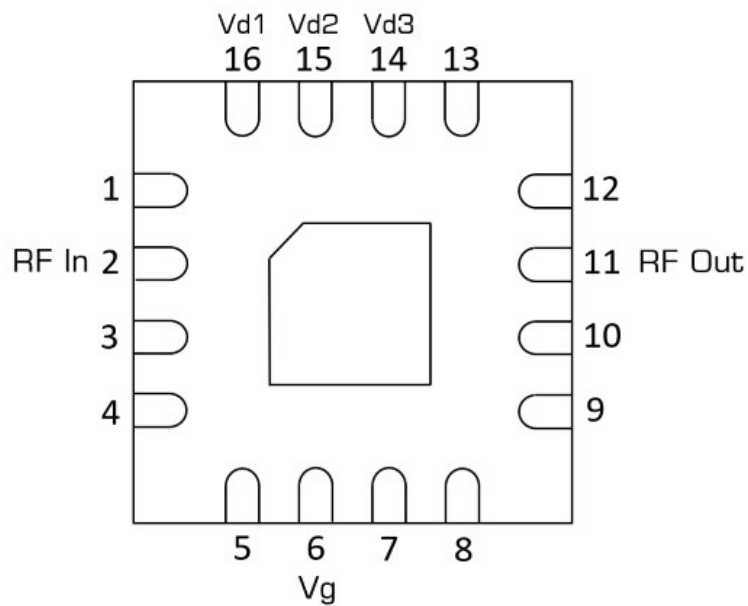

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	Ground paddle and non-connected pins must be connected to a DC/RF ground potential with high thermal and electrical conductivity, and low inductance.	GND 
Pin 11	RF Output	Pin 11 is the RF output of the amplifier, and is matched to 50 ohms. It is internally DC blocked.	 RF Out
Pin 14	Positive DC Supply Vd	Pins 14 provides +2.5V to +4V DC voltage to the amplifier's third stage. Negative voltage must be supplied to Pin 6 before turning on the positive supply voltage.	Vd 
Pin 15	Positive DC Supply Vd	Pins 15 provides +2.5V to +4V DC voltage to the amplifier's second stage. Negative voltage must be supplied to Pin 6 before turning on the positive supply voltage.	Vd 
Pin 16	Positive DC Supply Vd	Pins 16 provides +2.5V to +4V DC voltage to the amplifier's first stage. Negative voltage must be supplied to Pin 6 before turning on the positive supply voltage.	Vd 
Pin 2	RF Input	Pin 2 is the RF input of the amplifier, and is matched to 50 ohms. It is internally DC blocked.	 RF In
Pin 6	Negative DC Supply Vg	Pin 6 provides -0.4V to -0.6V of DC voltage. This must be turned on before turning on the positive supply voltage to Pin 1.	Vg 

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime. This amplifier is designed and characterized in a 50Ω system, and operation in a reflective environment can cause performance degradation.

Parameter	Maximum Rating	Unit
Continuous Power Dissipation (PDISS) (at 85 °C case temp.)	1	W
Maximum Operating Temperature	85	°C
Maximum Storage Temperature	150	°C
Max Junction Temperature for MTTF > 1E6 hours	175	°C
Minimum Operating Temperature	-40	°C
Minimum Storage Temperature	-65	°C
Negative Bias Voltage (Pin 6)	-2	V
Positive Drain Supply Current (with RF Input)	450	mA
Positive Drain Supply Voltage (Pin 14, 15, 16)	4.5	V
RF Input Power	20	dBm
Thermal Resistance, θJC	94	°C/W

Package Information

Parameter	Details	Rating
Weight	Package name: QFN	31.2g
Dimensions	-	3x3 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the Electrical Specifications. For limits, above which damage may occur, see Absolute Maximum Ratings .

Parameter	Min	Nominal	Max	Unit
Power Supply DC Current ¹	115	180	300	mA
Input Power for Saturation	6	9	12	dBm
Gate Bias DC Voltage	-0.6	-0.5	-0.4	V
Ambient Temperature	-40	25	85	°C
Power Supply DC Voltage	2.5	3	4	V

[1] Power Supply DC current is specified as Id1 + Id2 + Id3

Sequencing Requirements

Turn-on Procedure:

1. Apply Vg (Pin 6)
2. Apply Vd (Pin 14, 15, 16)

Turn-off Procedure:

1. Turn off Vd (Pin 14, 15, 16)
2. Turn off Vg (Pin 6)

Note: RF input power can be injected at any moment in the bias sequencing procedure.

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. QFNs are 100% RF tested.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Small Signal Gain	3V/-0.5V bias, -25 dBm Input Power	12	22	-	18	-	dB
Small Signal Gain	3V/-0.5V bias, -25 dBm Input Power	22	38	13	18	-	dB
Small Signal Gain	3V/-0.5V bias, -25 dBm Input Power	38	46	-	15	-	dB
Noise Figure	3V/-0.5V Bias	12	46	-	5.7	-	dB
Saturated Output Power ¹	3V/-0.5V bias	12	22	-	20	-	dBm
Saturated Output Power ²	3V/-0.5V bias	22	38	18	22	-	dBm
Saturated Output Power ³	3V/-0.5V bias	38	46	-	18	-	dBm
Output IP3	3V/-0.5V bias, -20 dBm Input Power	12	46	-	29	-	dBm
Input IP3	3V/-0.5V bias, -20 dBm Input Power	12	46	-	14	-	dBm
Output P1dB	3V/-0.5V bias	12	46	-	18	-	dBm
Input Return Loss	3V/-0.5V bias, -25 dBm Input Power	12	46	-	18	-	dB
Output Return Loss	3V/-0.5V bias, -25 dBm Input Power	12	46	-	14	-	dB
Reverse Isolation	3V/-0.5V bias, -25 dBm Input Power	12	46	-	52	-	dB
Input Power for Saturation	3V/-0.5V bias	12	46	-	9	-	dBm
Drain Current, Id ₄	3V/-0.4V	-	-	-	230	-	mA
Drain Current, Id ₅	3V/-0.5V	-	-	-	180	-	mA
Drain Current, Id ₆	3V/-0.6V	-	-	-	130	-	mA

^{[1][2][3]} Saturated output power specification defined using the EVAL-APM-7200SM P5dB compression curve shown in section 3.6, with board losses mathematically extracted.







^[4] Bias conditions for Id tested with no RF input power. See section 3.6 for DC current vs. RF power. Bias conditions presented as Vd/Vg. Drain current is specified as Id1 + Id2 + Id3

^{[5][6]} Bias conditions for Id tested with no RF input power. See section 3.6 for DC current vs. RF power. Bias conditions presented as Vd/Vg. Drain current is specified as Id1 + Id2 + Id3

Typical Performance Plots







Measurement data taken using the EVAL-AMM-7200SM module.

Evaluation board losses are mathematically extracted out of Output Compression Curves, Small Signal Gain Plots, and Noise Figure plots. All other plots include evaluation board losses.

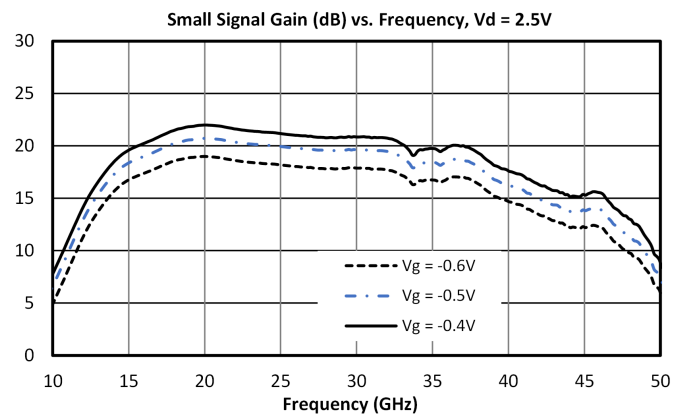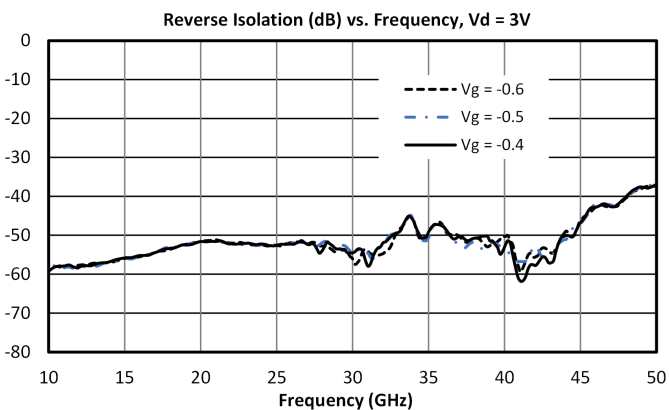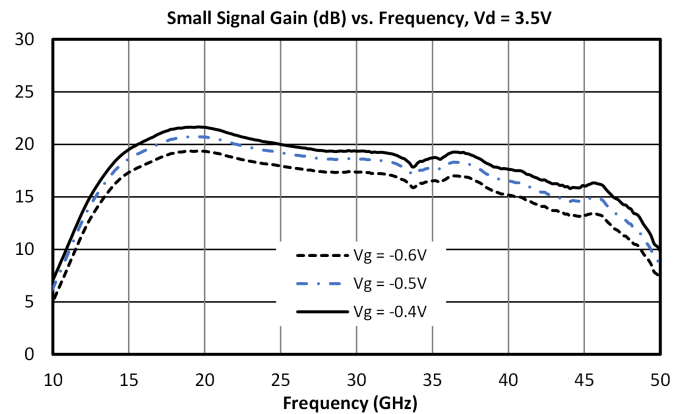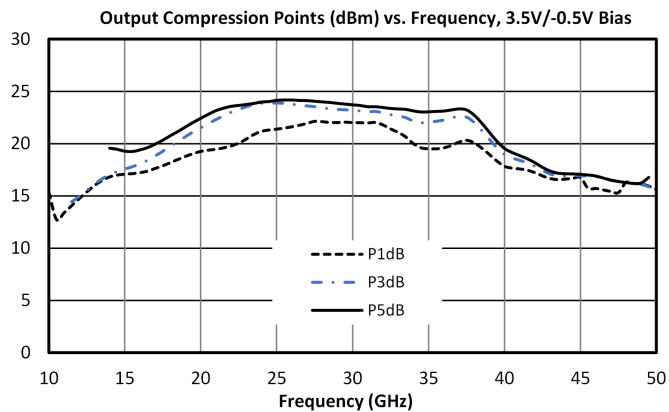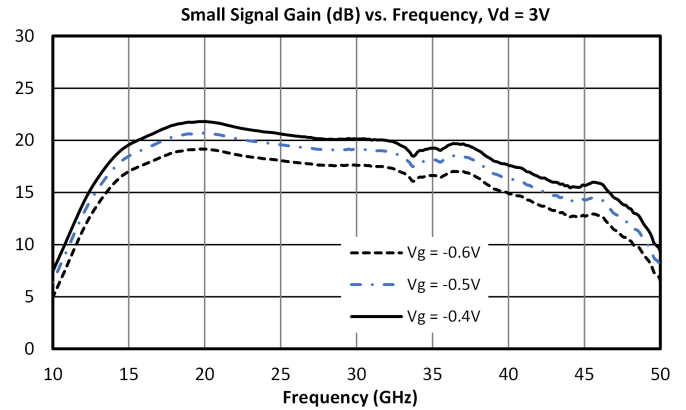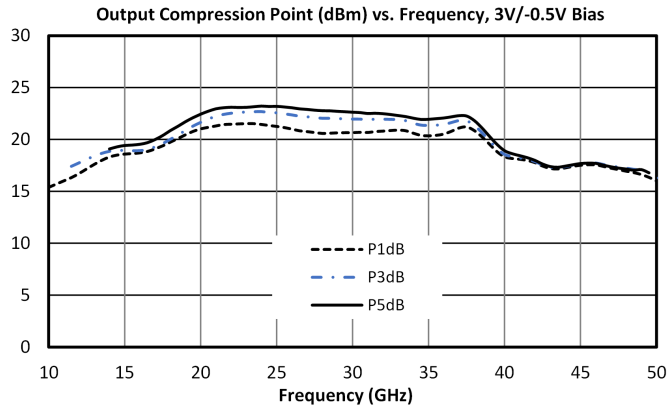





AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

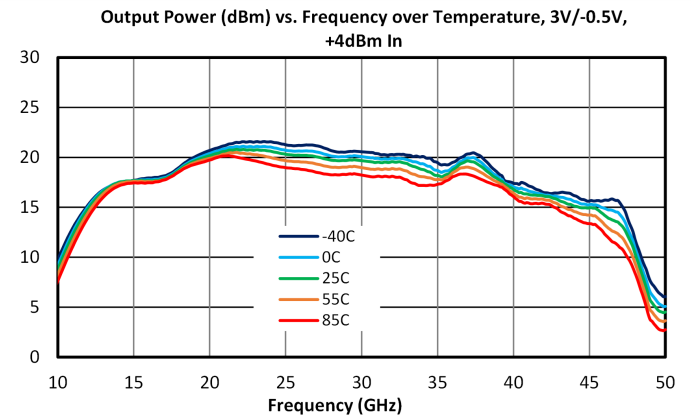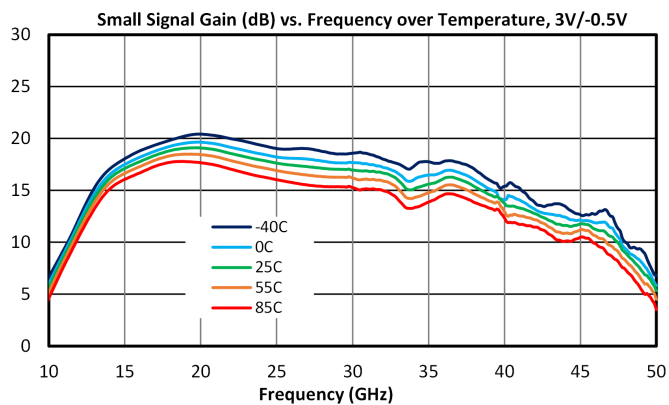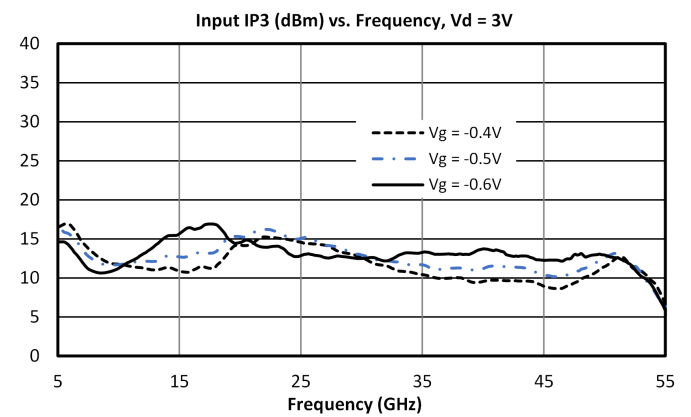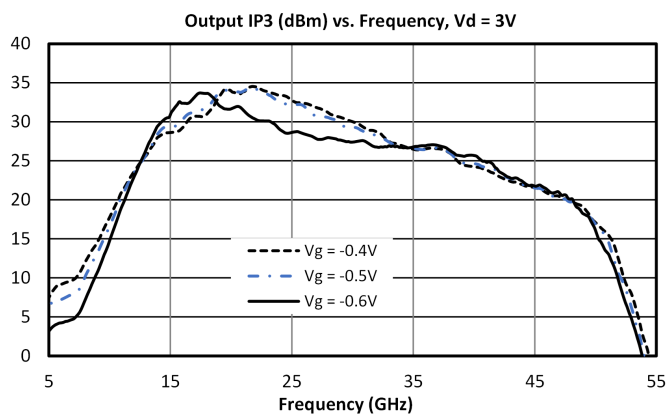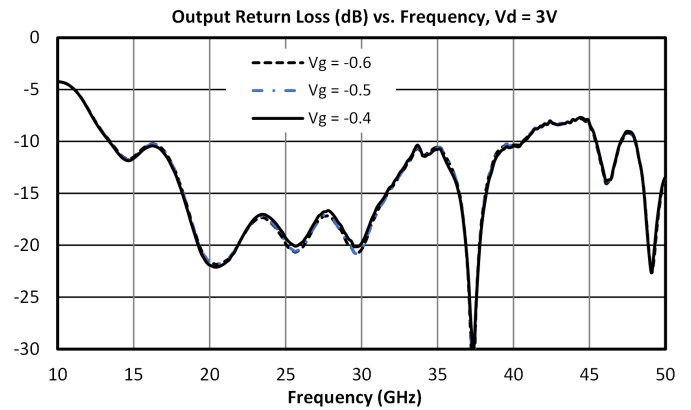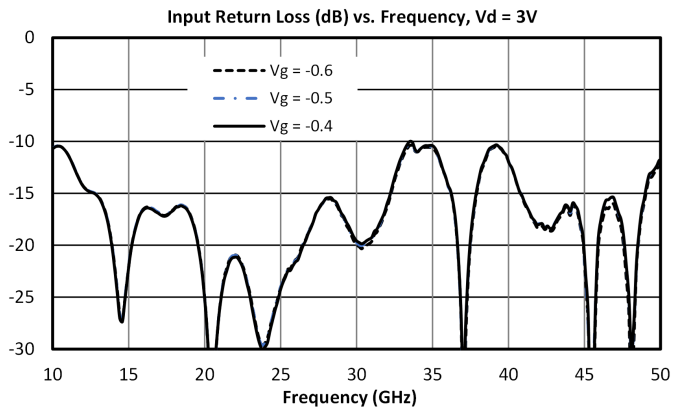



AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

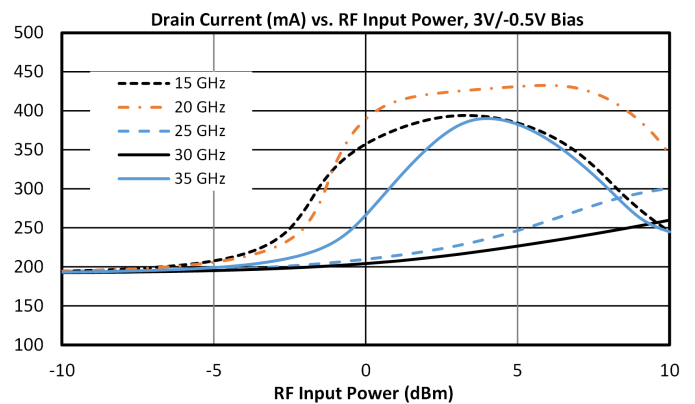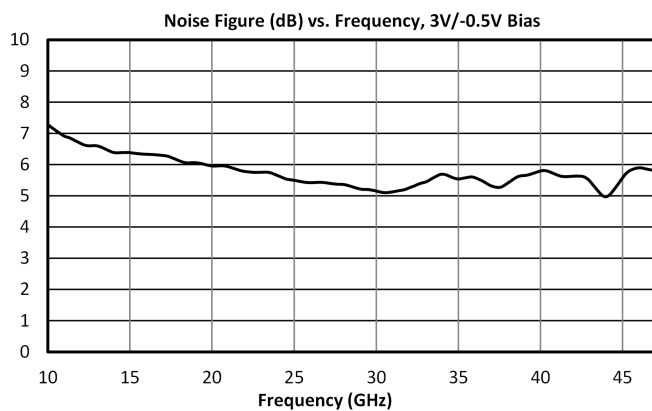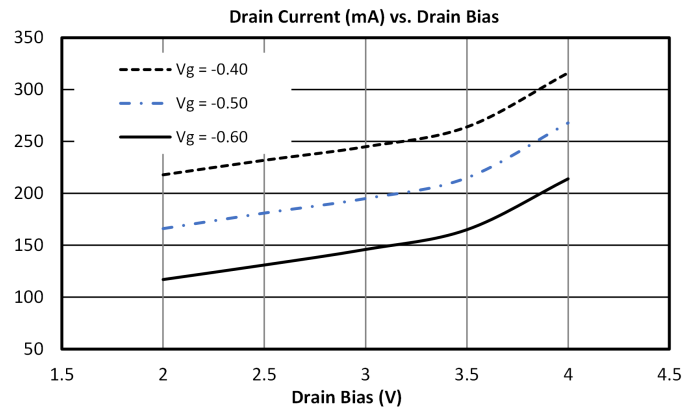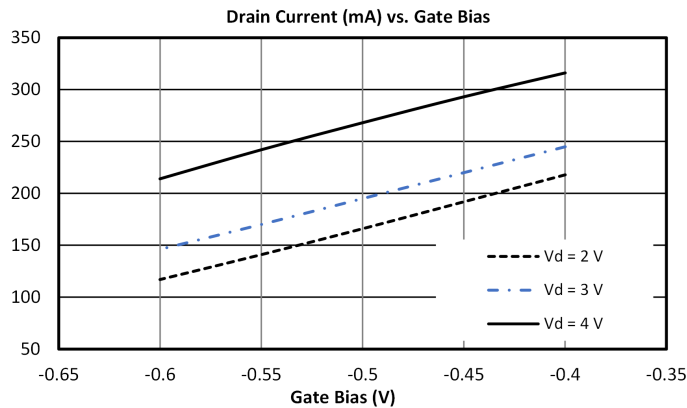


Typical Performance Plot of Marki MM1-1140H Using AMM-7200SM as LO Driver

Plots taken using EVAL-AMM-7200SM as LO driver for connectorized MM1-1140H module in configuration A with a 91MHz IF. Power specified is input power to EVAL-AMM-7200SM driver.

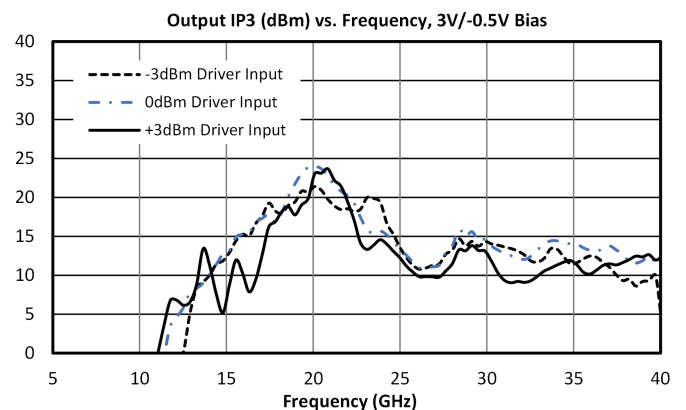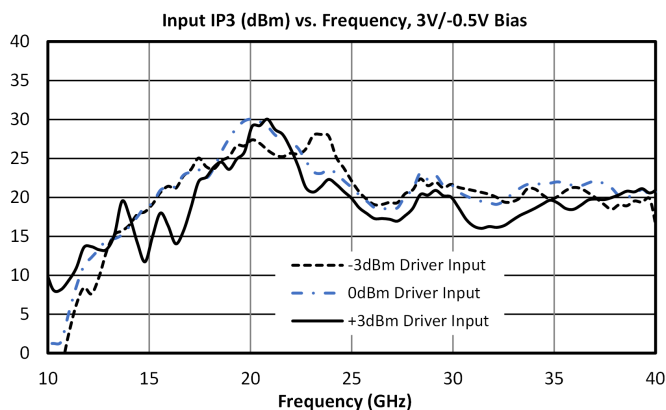




AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

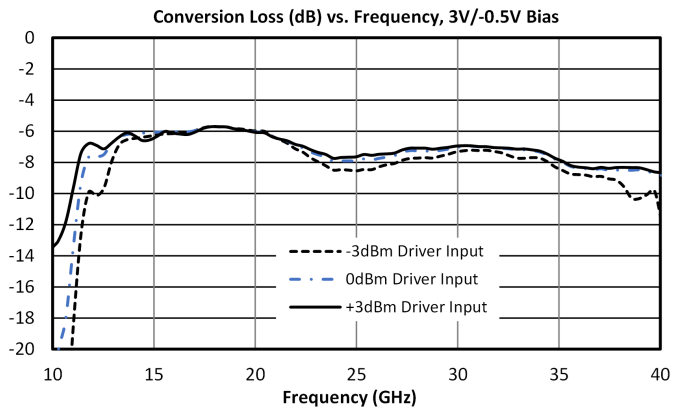

Typical Performance Plot of Marki MM1-1240S Using AMM-7200SM as LO Driver

Plots taken using EVAL-AMM-7200SM as LO driver for connectorized MM1-1240S module in configuration A with a 91MHz IF. Power specified is input power to EVAL-AMM-7200SM driver.

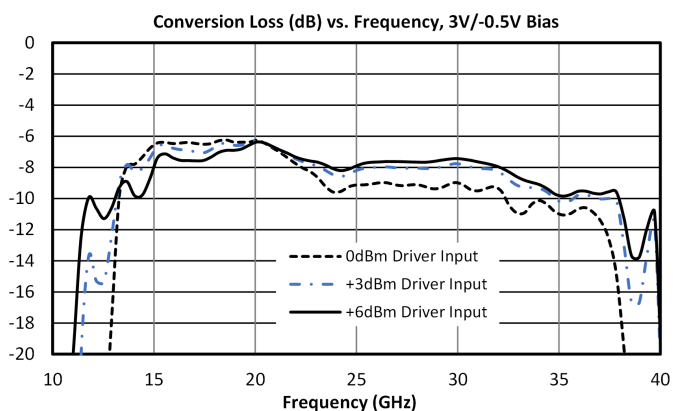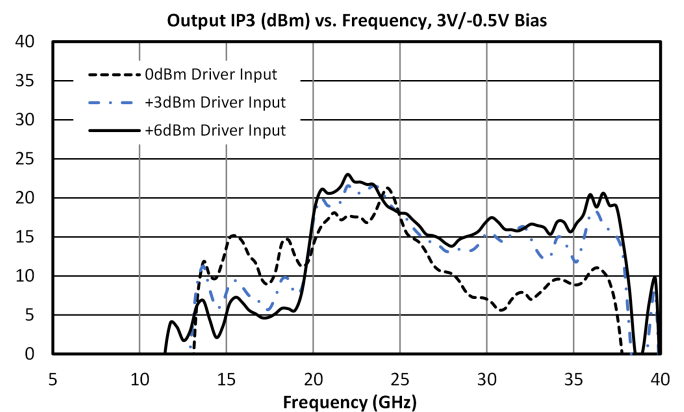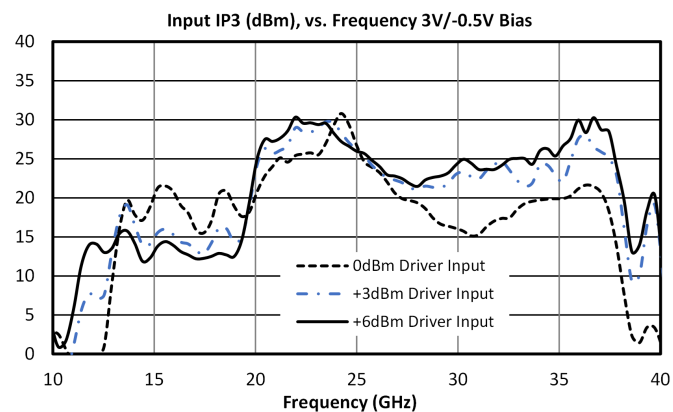

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier


Application Information

Below is the recommended application circuit for the AMM-7200SM. This is the configuration that is used to characterize this device. However, each PCB layout and environment are different which may require minor modifications of the biasing network. Please contact support@markimicrowave.com for more information.

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver
Amplifier

Application Circuit

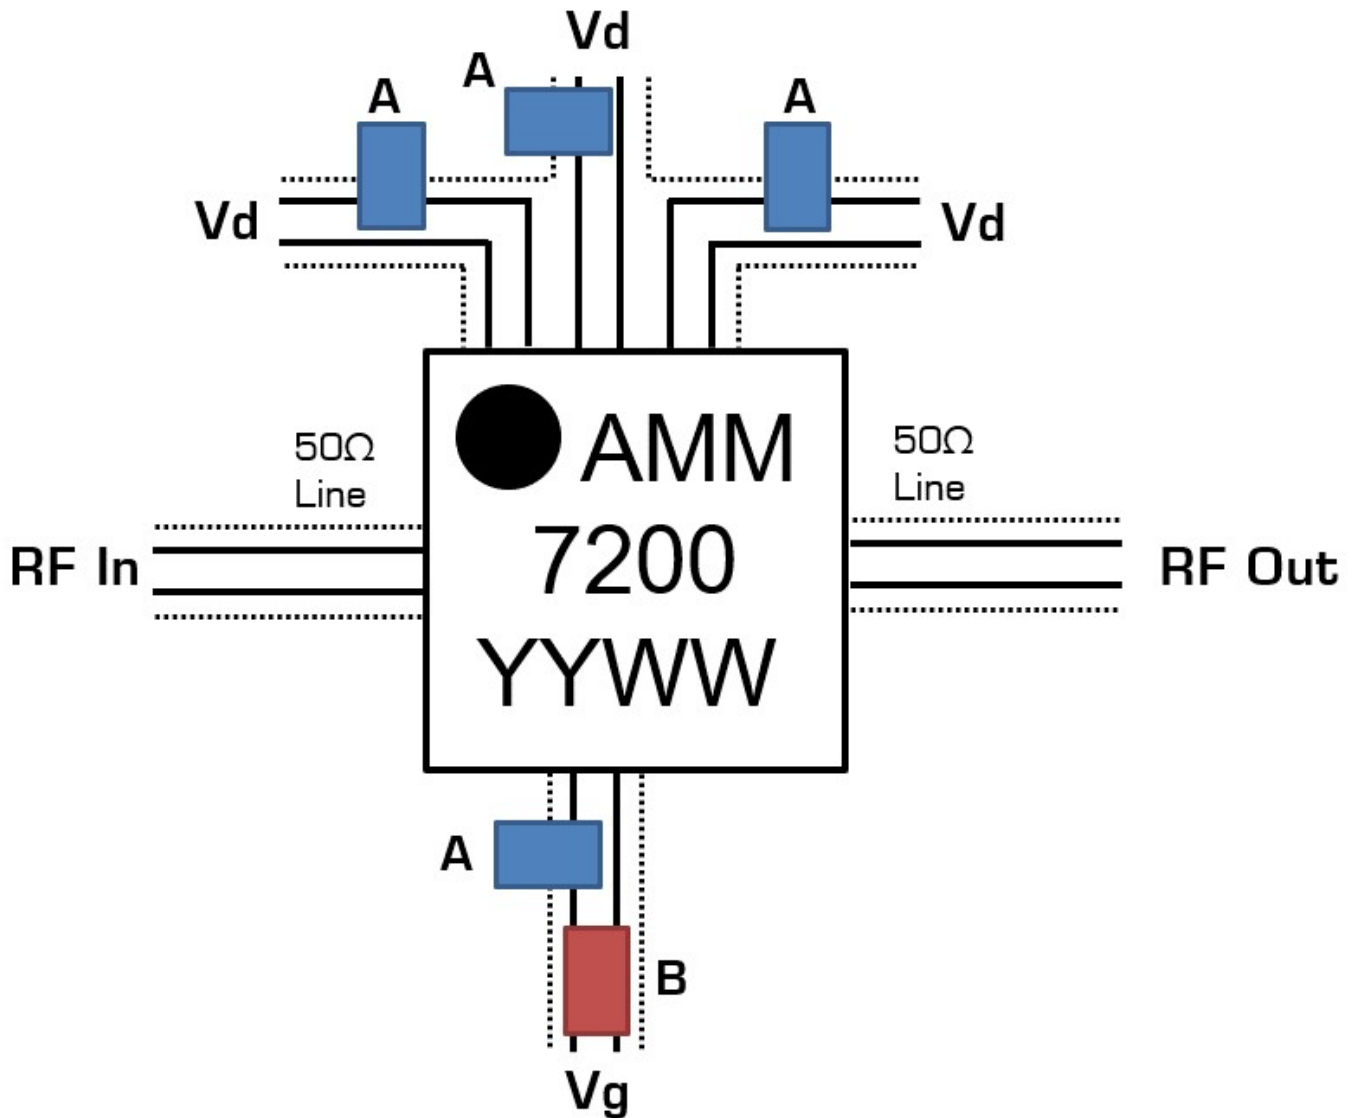

Designator	Description	Sample Part Number
A	0.1μF 16V 0402 Capacitor	AVX 0402YD104KAT2A
B	10Ω 0402 Resistor	TE CPF0402B10RE1

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

Application Circuit Description

The three Vd lines are separated to minimize feedback between the transistor's stages. The passive devices should be 0402 or 0201 surface mount. Examples of suitable passive devices would be the AVX 0402YD104KAT2A capacitor and TE CPF0402B10RE1 resistor. In addition to the resistor and capacitor on the gate pin, the layout of the board should be designed to minimize stray coupling between the drain and gate biasing traces on the board. Additionally, the gate biasing pin AMM-7200SM can draw up to 0.5mA at certain combinations of frequency and input power.

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

Constant Current and Constant Voltage Operation

As with most amplifiers utilizing HEMT technology, the AMM-7200SM can be biased with a constant gate and drain voltage, or with a constant drain current by regulating the gate voltage. Using a constant gate and drain voltage for biasing reduces complexity, but has variable current consumption during operation. On the other hand, biasing the gate using a feedback network that samples the drain current minimizes unit-to-unit variation in gain and other parameters.


Under small signal excitation at a fixed temperature, these two approaches are equivalent. However, they will diverge in large signal conditions, where the drain current is affected by the frequency and power of the input signal. In these conditions P1dB, P3dB, and P5dB will be somewhat different, but based on tests with similar parts, they will be within a few dBm of the constant voltage curves.

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver
Amplifier

Mechanical Data

Outline Drawing

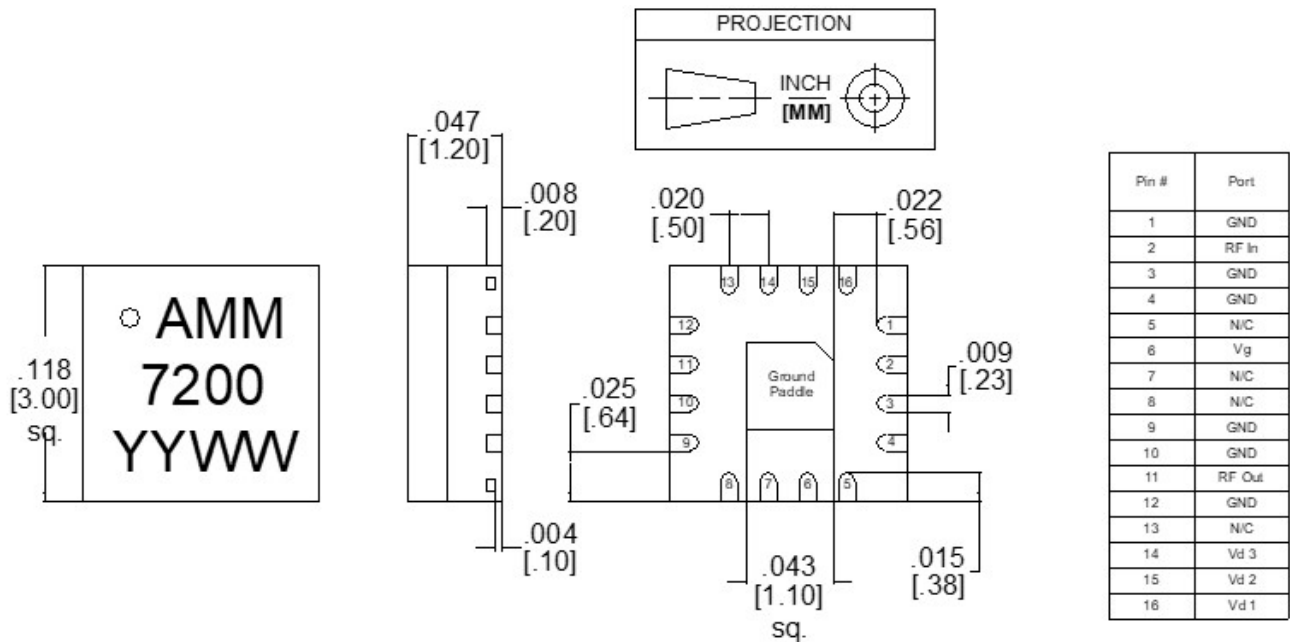


Notes:

- 1) QFN material is plastic
- 2) I/O Leads and Die Paddle are 0.05 microns Au over 0.02 microns Pd over 0.5 microns Ni
- 3) All unconnected pins should be connected to PCB RF ground.

AMM-7200SM


12-46 GHz GaAs Surface Mount LO Driver
Amplifier

Footprint Image

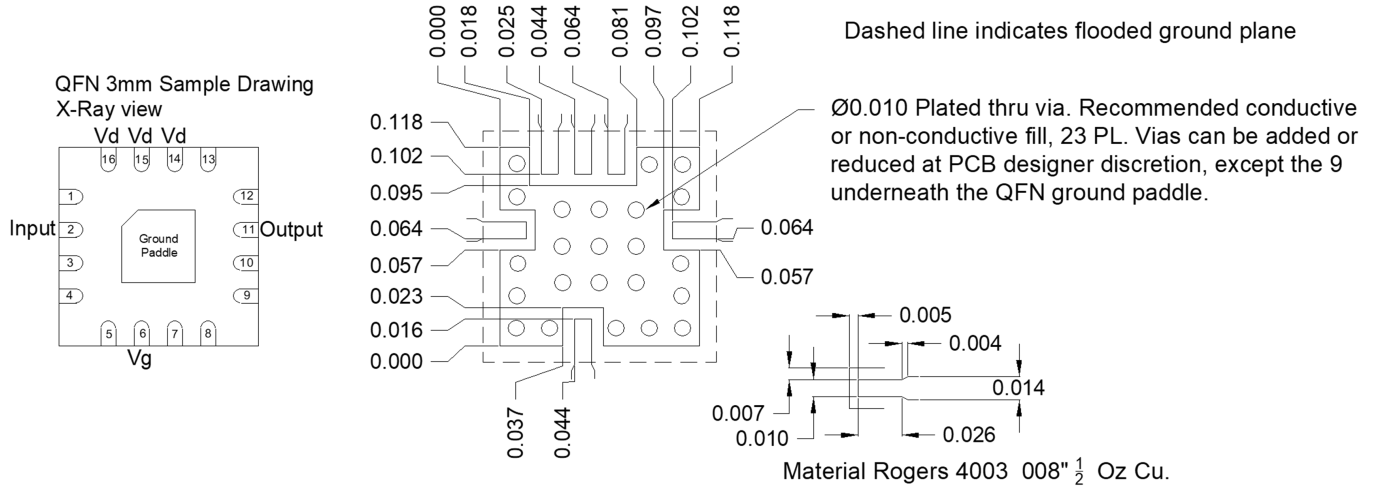

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver
Amplifier

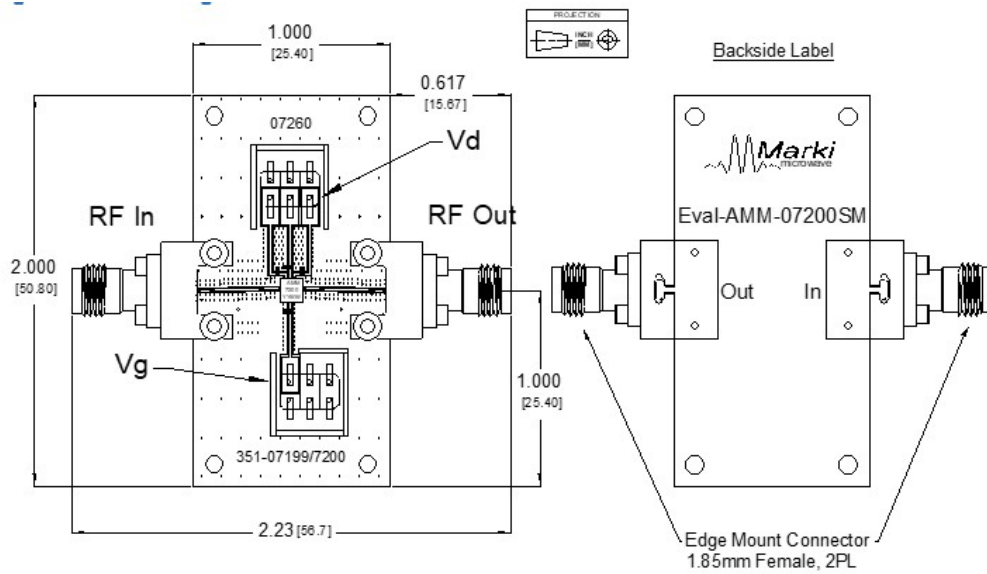

AMM-7200SM

12-46 GHz GaAs Surface Mount LO Driver Amplifier

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2021, Marki Microwave, Inc