



## FREQUENCY DOUBLERS

**D-0612**



### Features

- Input 6.0 to 12.0 GHz
- Output 12.0 to 24.0 GHz
- 9.5 dB Typical Conversion Loss
- 25 dBc Typical 3rd Harmonic Suppression
- Two Input Levels Available
- Octave Band Input

**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system

| Parameter                                                              | INPUT<br>(GHz) | OUTPUT<br>(GHz)       | Min      | Typ      | Max  | Diode Option<br>LO drive level (dBm) |
|------------------------------------------------------------------------|----------------|-----------------------|----------|----------|------|--------------------------------------|
| Conversion Loss (dB)<br>F(in)<br>2F(out)                               | 6.0-12.0       | 12.0-24.0             |          | 9.5      | 12.0 |                                      |
| Suppressions (dBc)<br>F(in) Fundamental<br>3F(out) Third Harmonic      |                | 6.0-12.0<br>18.0-24.0 | 15<br>20 | 20<br>25 |      |                                      |
| Input Level (dBm)<br>(Consult Marki Microwave for Higher Input Levels) |                |                       |          |          |      | L (+10 to +13)<br>M (+13 to +16)     |

### Part Number Options

| Please specify diode level and package style by adding to model number.                                                |                          |
|------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Package Style(s) <sup>1</sup>                                                                                          | Example                  |
| <a href="#">A</a> , <a href="#">B</a> , <a href="#">C</a> , <a href="#">E</a> , <a href="#">EZ</a> , <a href="#">P</a> | D-0612 <u>L</u> <u>A</u> |

<sup>1</sup>Connectorized test fixtures available for most carrier and surface mount packages. Consult factory.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.







## FREQUENCY DOUBLERS

Page 2

**D-0612**

Input 6.0 to 12.0 GHz  
Output 12.0 to 24.0 GHz

Typical Performance

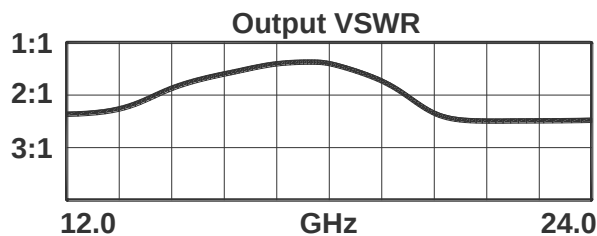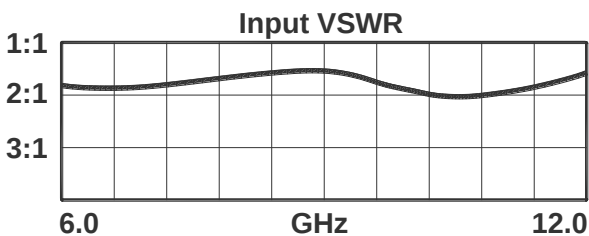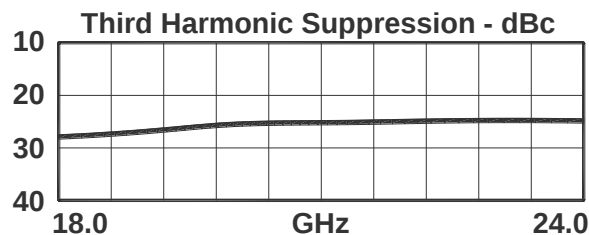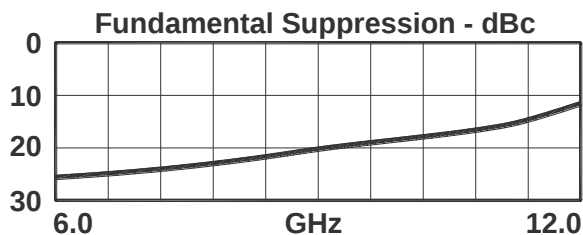

### DATA SHEET NOTES:

1. Doubled Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
2. Maximum input power is +23 dBm at +25°C, derated linearly to +20 dBm at +100°C.
3. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
4. Standard configuration for A, B, and C outlines are with connectors and bottom spacer.
5. Catalog doubler circuits are continually improved. Configuration control requires custom model numbers and specifications.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax: 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)

[www.markimicrowave.com](http://www.markimicrowave.com)