

MBAL-0220SM

Passive MMIC 2-20 GHz Surface Mount Balun

DEVICE OVERVIEW

General Description

The MBAL-0220SM is a GaAs passive MMIC balun in a 4mm QFN surface mount package. Its frequency ranges from 2 to 20 GHz and offers a 1:2 impedance ratio. The 4mm QFN package is a lead free, RoHS compliant package compatible with standard leaded and lead-free solder reflows. Connectorized evaluation packages are available. The MBAL-0220SM is an excellent choice for balanced amplifiers, clock distribution, and higher order Nyquist sampling in analog to digital converters.



[Download s-parameters here](#)


Features

- 2 GHz to 20 GHz 1:2 Balun (Balanced to Unbalanced Transformer)
- Tuned for Optimal Phase/Amplitude Balance
- RoHS Compliant

Applications

N/A

Functional Block Diagram

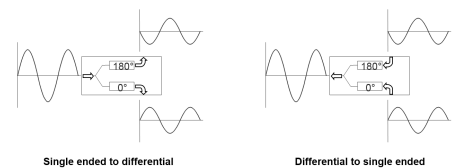

Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MBAL-0220SM	Passive MMIC 2-20 GHz Surface Mount Balun	QFN	-	RoHS	Released	EAR99
EVAL-MBAL-0220	Evaluation Board, Passive MMIC 2-20 GHz Surface Mount Balun	-	-	RoHS	Released	EAR99
MBAL-0220-TR	Tape and Reel, Passive MMIC 2-20 GHz Surface Mount Balun	QFN	7"	RoHS	Released	EAR99

Table Of Contents

■ Device Overview

- General Description
- Features
- Applications
- Functional Block Diagram

■ Port Configuration and Functions

- Port Functions

■ Specifications

- Absolute Maximum Ratings
- Package Information
- Electrical Specifications
- Mixed Mode Scattering Parameters
- Typical Performance Scattering Parameters






■ Mechanical Data

- Outline Drawing

■ Footprint Image

Port Configuration and Functions

Port Functions

Port	Function	Description	Equivalent Circuit for Package
1-3, 5-14, 17-24	Non-connect (NC)	These pins are not connected internally. Datasheet performance is tested with NC pins grounded.	NC 
15	Out 2	Pin 15 is DC short. Blocking capacitor is optional.	Pin 15 
16	Out 1	Pin 16 is DC short. Blocking capacitor is optional.	Pin 16 
4	Common	Pin 4 is DC short. Blocking capacitor is optional.	Pin 4 
Paddle	Ground	Ground pad should be connected to RF/DC ground with low electrical and thermal resistance.	GND 

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	125	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-65	°C
Minimum Storage Temperature	-65	°C
RF Power Handling	30	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	3.9 x 3.9 mm

Electrical Specifications

Specifications guaranteed for +25°C, measured in a 50Ω system. Measured data was taken on an Eval Board with output traces having an offset.







Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Insertion Loss as a Mode Converter ¹	-	2	20	-	6	8.5	dB
Nominal Phase Shift	-	2	20	-	1800	-	°
Amplitude Balance ²	-	2	20	-	0.25	1	dB
Phase Balance ³	-	2	20	-	3	10	°
Common Mode Rejection	-	2	20	22	30	-	dB
Isolation	-	2	20	-	10	-	dB
Common Port VSWR	-	2	20	-	1.4	-	-
Output VSWR	-	2	20	-	2	-	-

^[1] Includes fixture losses.

^{[2][3]} Guaranteed only for eval board.







Mixed Mode Scattering Parameters

Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: S_{cs12} is the Common output response given a single ended input.

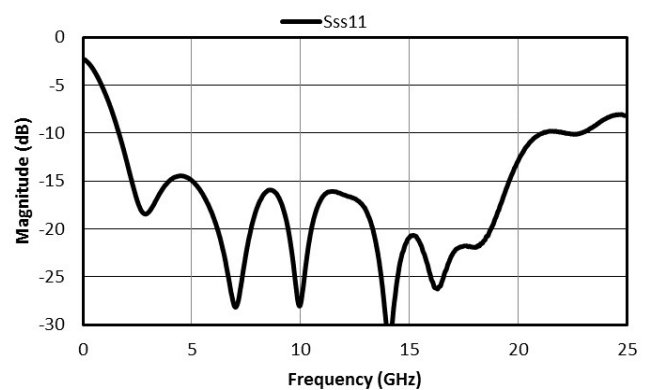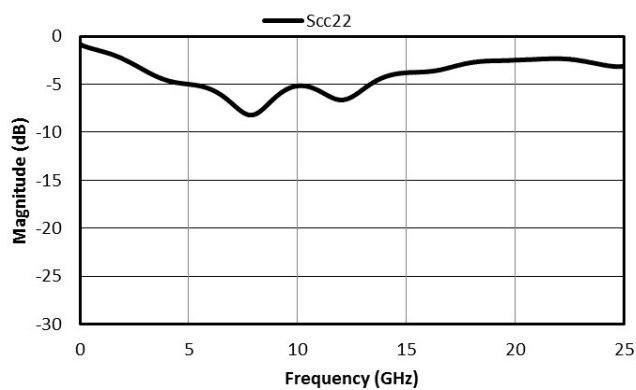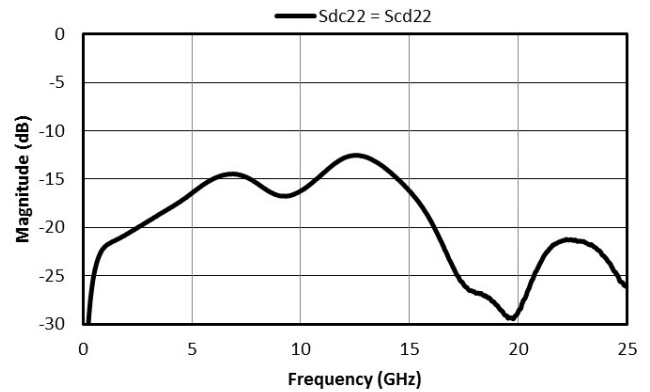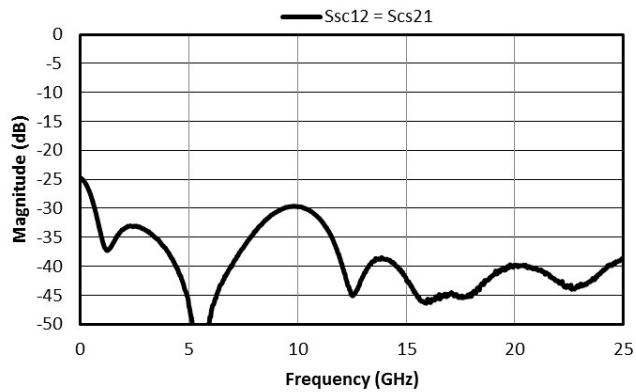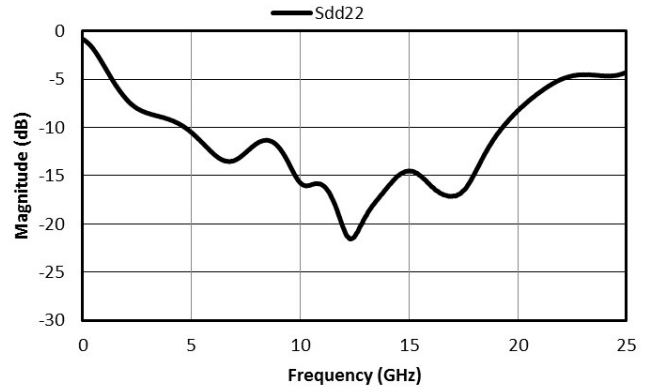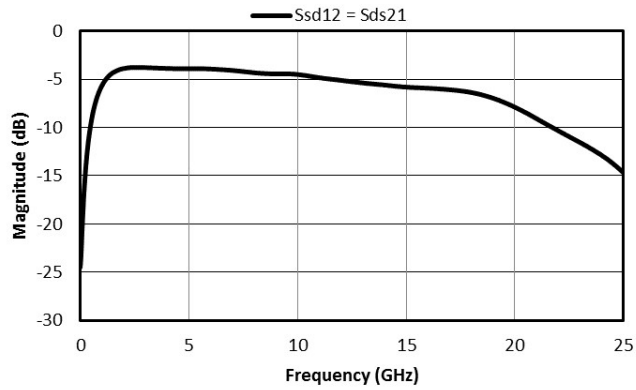

Typical Performance Scattering Parameters

Three port scattering parameters measured as three single-ended 50Ω ports showing relationship between any two ports.

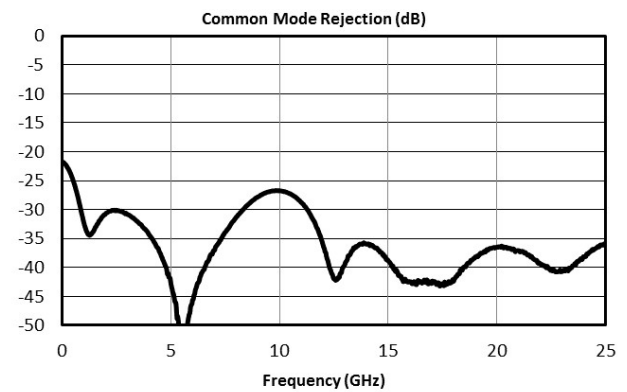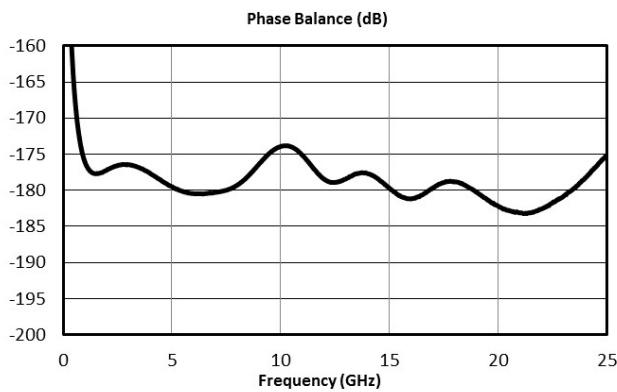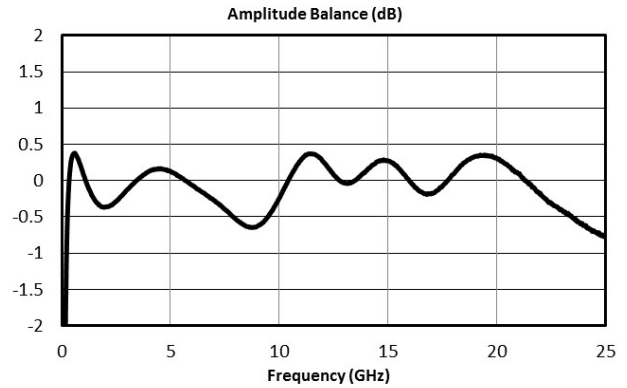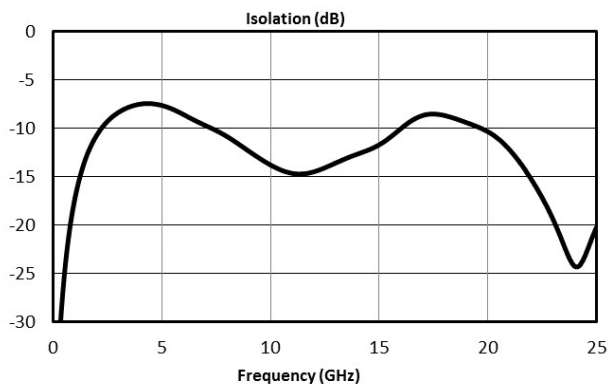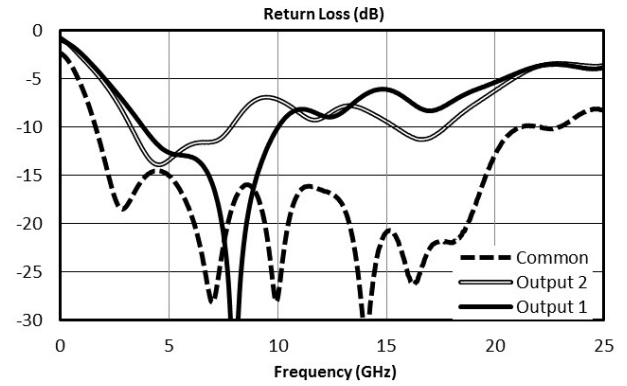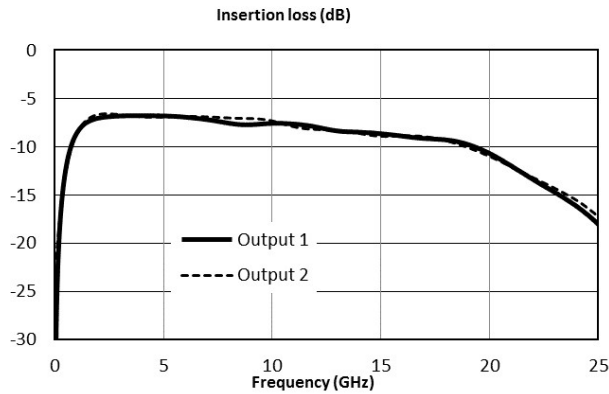


MBAL-0220SM

Passive MMIC 2-20 GHz Surface Mount Balun

Mechanical Data

Outline Drawing

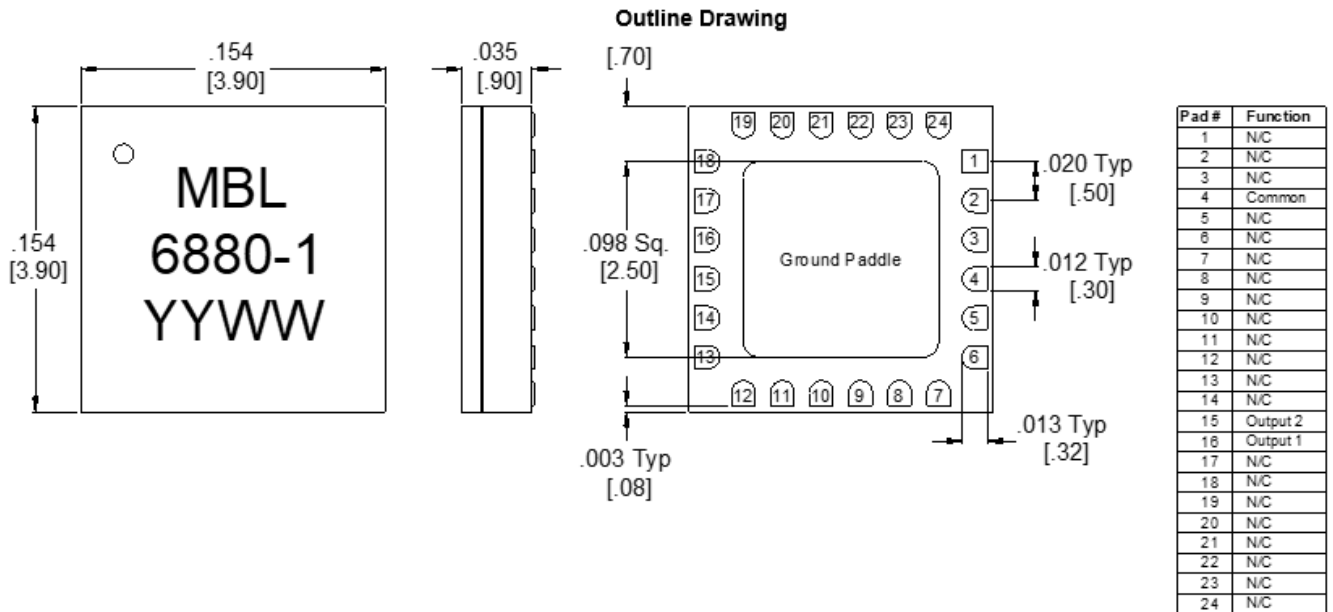


- Substrate material
- I/O Leads and Ground Paddle plating is (from base to finish):

Ni:	8.89um	MAX	1.27um	MIN
Pd:	0.17um	MAX	0.07um	MIN
Au:	0.254um	MAX	0.03um	MIN

MBAL-0220SM

Passive MMIC 2-20 GHz Surface Mount Balun

Footprint Image

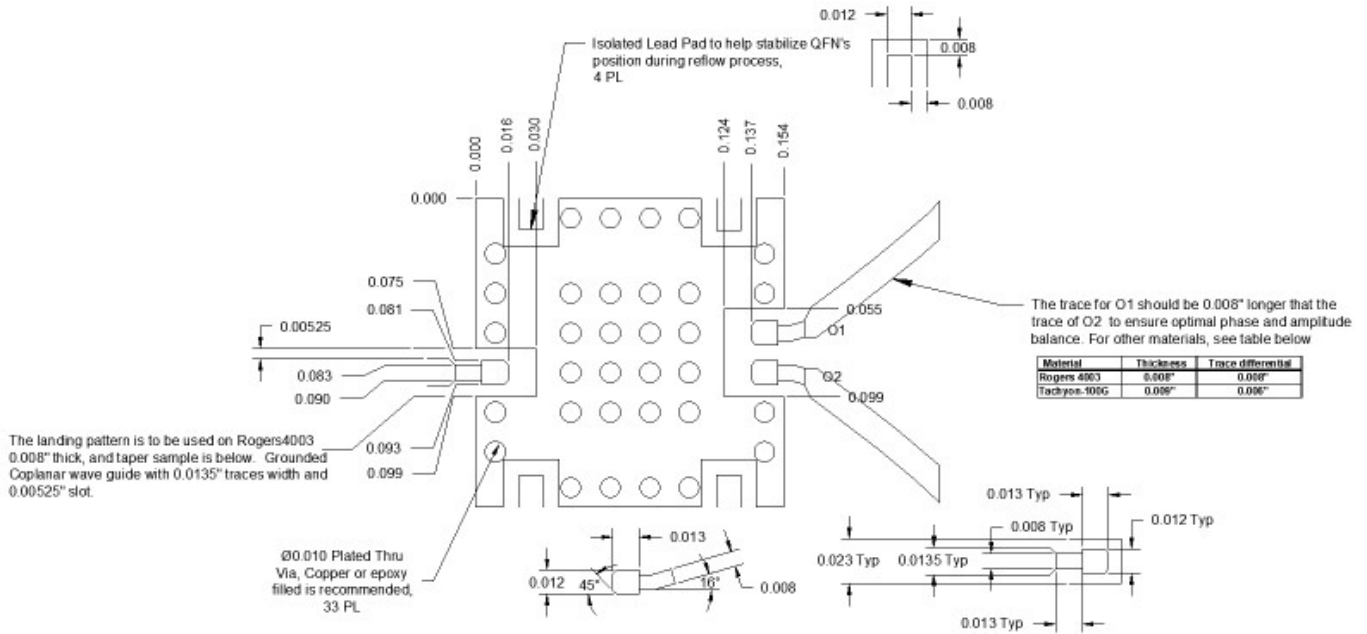


MBAL-0220SM


Passive MMIC 2-20 GHz Surface Mount Balun

Port	Connector Type
C	2.92mm Female
O1	2.92mm Female
O2	2.92mm Female

Note: O1 is 8 mils longer than O2

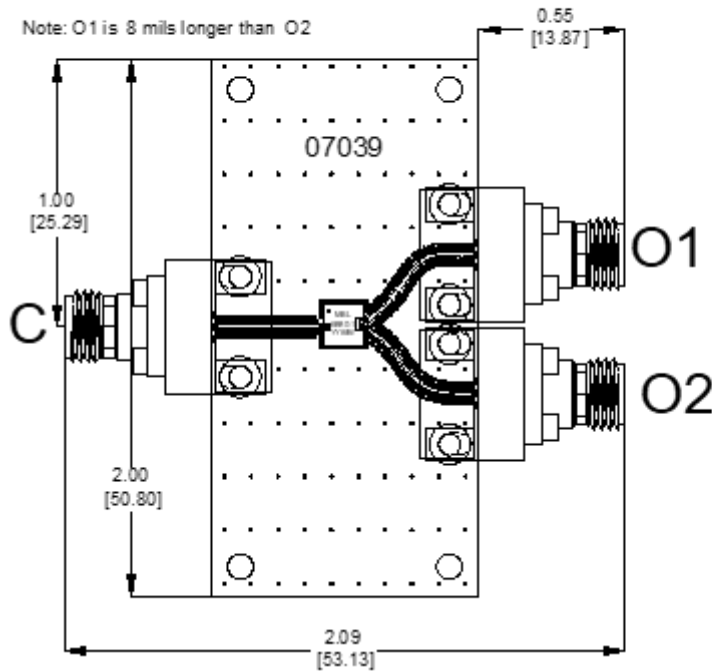

All dimensions are typical

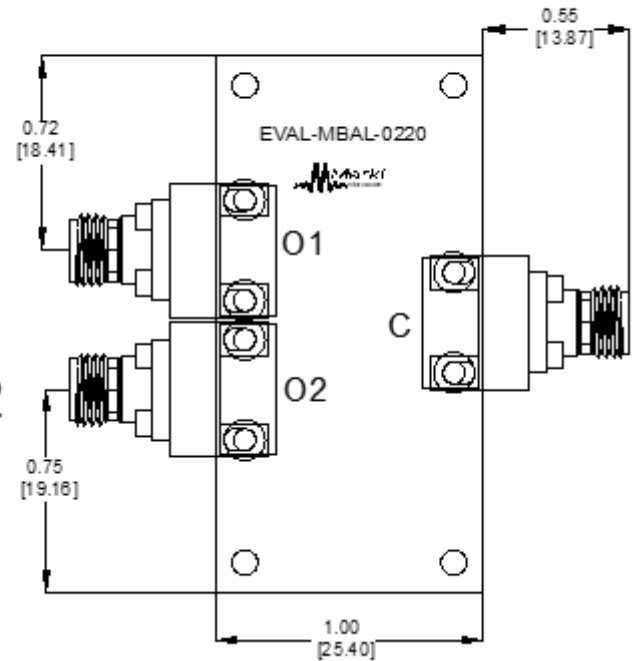

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2022 - 2023, Marki Microwave, Inc