

MC10-25110M2

MMIC 25-110 GHz Directional Coupler

DEVICE OVERVIEW

General Description

The MC10-25110M2 is a mmWave 25-110 GHz, 10dB directional coupler in our connectorized miniature M2-package enabling operation up to 110 GHz. The coupler features excellent directivity, return loss and coupling accuracy. Passive GaAs MMIC technology allows production of smaller constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances result in less unit-to-unit variation than traditional coupler technologies, allowing for accurate simulations using the provided S3P file taken from measured production units. The MC10-25110M2 is available as a 1.0mm connectorized module.




Features

- Broadband Performance
- Excellent Return Loss
- High Directivity

Applications

N/A

Functional Block Diagram

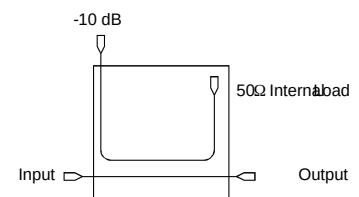

Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
MC10-25110M2	MMIC 25-110 GHz Directional Coupler	M2	<u>Standard</u>	REACH RoHS	Released	EAR99

Table Of Contents

■ Device Overview	■ Revision History
General Description	
Features	■ Specifications
Applications	Absolute Maximum Ratings
Functional Block Diagram	Package Information
	Electrical Specifications
■ Port Configuration and Functions	Typical Performance Plots
Port Diagram	■ Mechanical Data
Port Functions	Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2023-06-01	Initial Datasheet Release




Port Configuration and Functions

Port Diagram

A top down view of the MC10-25110M2’s M2 package outline drawing is shown below.

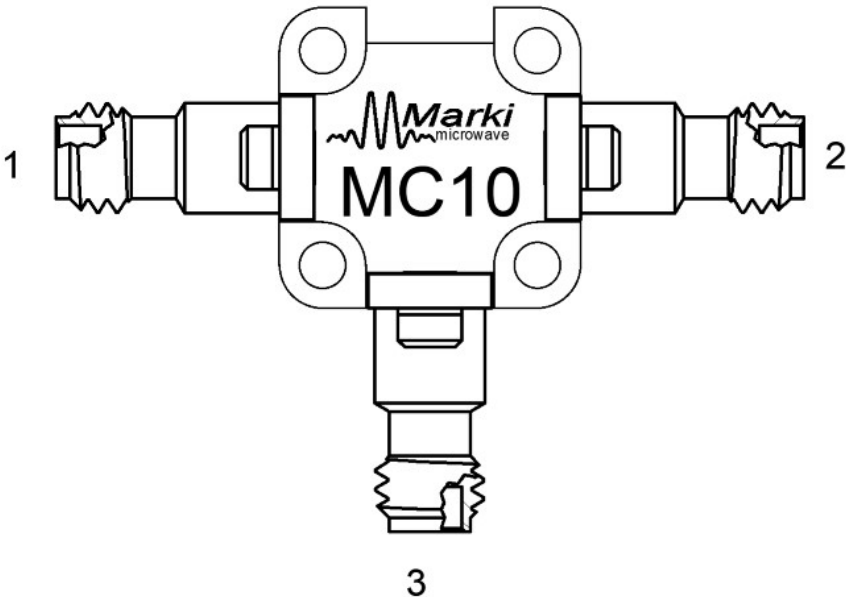

Port Functions

Port	Function	Connector Type	Description	Equivalent Circuit for Package
GND	Ground	-	M2 package ground path is provided through the metal housing.	Pad 
Port 1	Input	1.0F	The input port is DC short to the output port and open to ground.	
Port 2	Output	1.0F	The output port is DC short to the input port and open to ground.	
Port 3	Coupled	1.0F	The coupled port is DC connected to a 50 Ω load.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
DC Current, Port 1 and 2	160	mA
DC Current, Port 3	32	mA
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
RF Power Handling	3	W

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	27.62x19.37 mm

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Mean Coupling	-	25	110	8	10	13	dB
Coupling Loss ¹	-	25	110	0.75	0.46	0.22	dB
Direct Line Insertion Loss	-	0	110	-	2.75	5	dB
Amplitude Flatness ²	-	25	110	-	20	0.5	dB
Maximum Coupling Deviation	-	25	110	-	70	2.5	dB
Directivity	-	25	110	12	19.5	-	dB
IL Corrected Directivity ³	-	25	110	15	22.5	-	dB
Excess Insertion Loss (dB) ⁴	-	0	110	-	2.2	4.25	dB
Impedance	-	-	-	-	50	-	Ω
Pass Band Return Loss	-	0	110	-	15	-	dB





^[1] Coupling loss based on average coupling factor.

^[2] Amplitude Flatness = Median value of ABS(Measured Coupling Power – Average Coupling Factor).

^[3] IL Corrected Directivity = Directivity + Insertion Loss.

^[4] Excess Insertion Loss = (Input Port to Output Port Insertion Loss) – Coupling Loss.

Typical Performance Plots

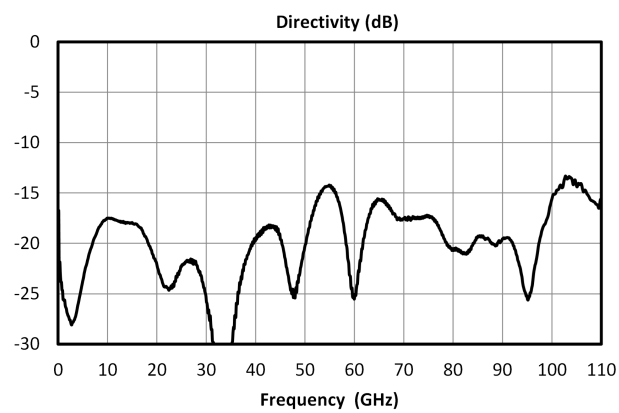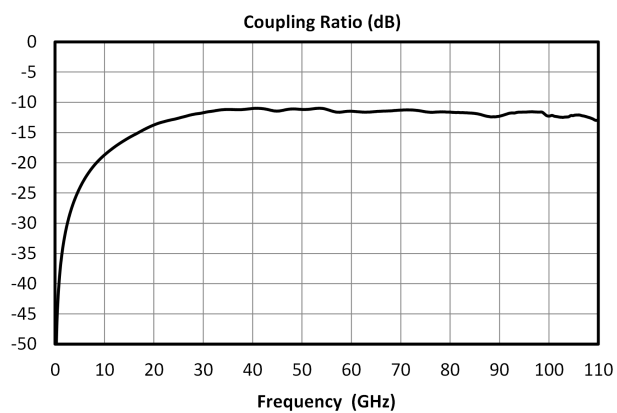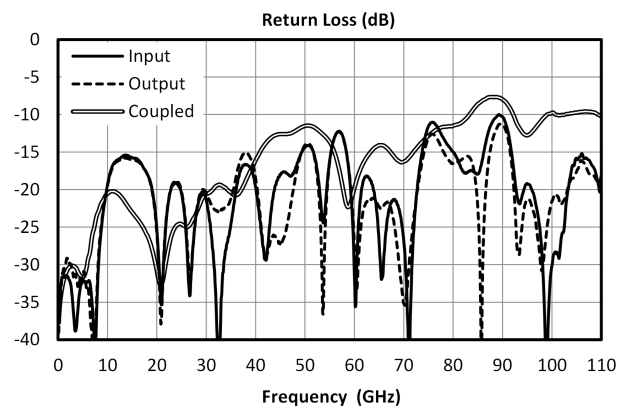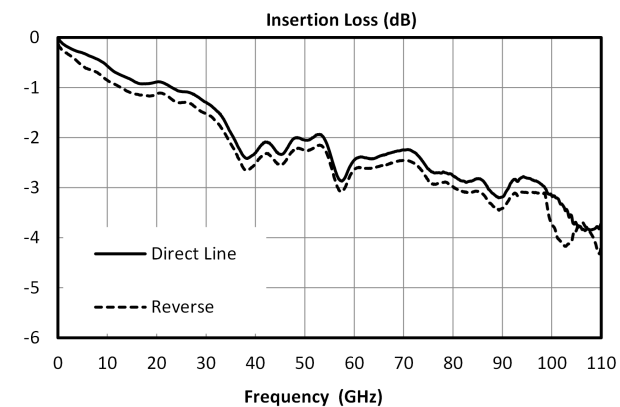


MC10-25110M2


MMIC 25-110 GHz Directional Coupler

Mechanical Data


Outline Drawing

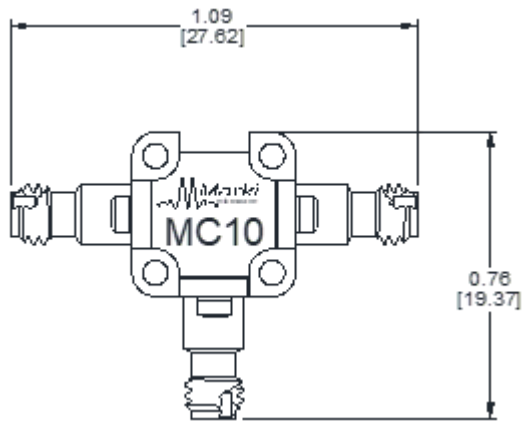

Topside View

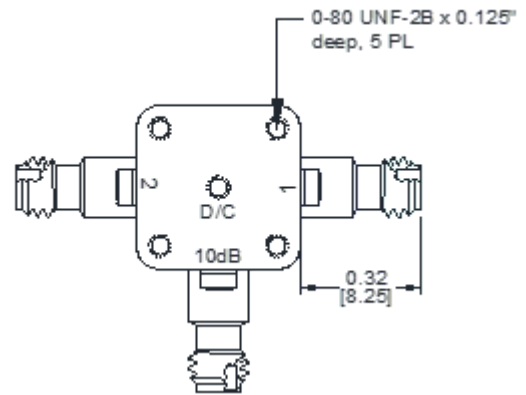

Bottomside View

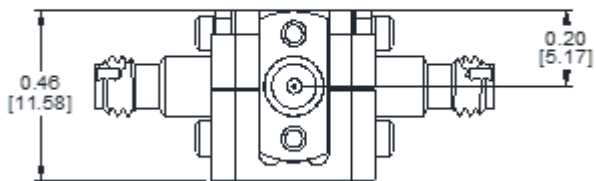

1.00 mm Connector View

All measurements are typical



Note: Connectors are not removeable. Do not attempt replacing.

Port	Connector Type
1,2,3	1.00 mm Female

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2023, Marki Microwave, Inc