


# MFBP-00166PSM

## Passive GaAs MMIC 8.2 - 9.3 GHz Bandpass Filter

### DEVICE OVERVIEW

#### General Description

The MFBP-00166PSM passive MMIC surface mount bandpass filter is an ideal solution for small form factor, high rejection filtering. The MFBP-00166PSM features a 8.2-9.3GHz 1dBc passband and 3dB center frequency insertion loss. Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit-to-unit variation than traditional filter technologies. The MFBP-00166PSM is available as a 5 mm plastic QFN. Low unit to unit variation allows for accurate simulations using the provided S2P file taken from measured production units.



[Download s-parameters here](#)

#### Features

- 24 dB Return Loss
- 3 dB Insertion Loss @ Fc
- High Stop Band Suppression
- Wide Stop Band with Fast Roll-Off

#### Applications

N/A

#### Functional Block Diagram



#### Part Ordering Options

| Part Number     | Description                                                       | Package | Green Status | Product Lifecycle | Export Classification |
|-----------------|-------------------------------------------------------------------|---------|--------------|-------------------|-----------------------|
| MFBP-00166PSM   | Passive GaAs MMIC 8.2 - 9.3 GHz Bandpass Filter                   | PSM     | RoHS REACH   | Released          | EAR99                 |
| EVB-MFBP-00166P | Evaluation Board, Passive GaAs 8.2 - 9.3 GHz MMIC Bandpass Filter | EVB     | RoHS REACH   | Released          | EAR99                 |

### Table Of Contents


|                                                                                                                                                      |                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div> <div>■</div> <div> <b>Device Overview</b><br/> General Description<br/> Features<br/> Applications<br/> Functional Block Diagram </div> </div> | <div> <div>■</div> <div> <b>Specifications</b><br/> Absolute Maximum Ratings<br/> Package Information<br/> Electrical Specifications<br/> Typical Performance Plot </div> </div> |
| <div> <div>■</div> <div> <b>Port Configuration and Functions</b><br/> Port Diagram<br/> Port Functions </div> </div>                                 | <div> <div>■</div> <div> <b>Mechanical Data</b><br/> Outline Drawing </div> </div>                                                                                               |
| <div> <div>■</div> <div> <b>Revision History</b> </div> </div>                                                                                       | <div> <div>■</div> <div> <b>Footprint Image</b> </div> </div>                                                                                                                    |
|                                                                                                                                                      | <div> <div>■</div> <div> <b>Evaluation Board</b><br/> Evaluation Board Outline Drawing </div> </div>                                                                             |

### Revision History




| Revision Code | Revision Date | Comment         |
|---------------|---------------|-----------------|
| -             | 2025-11-18    | Initial Release |

## Port Configuration and Functions

### Port Diagram

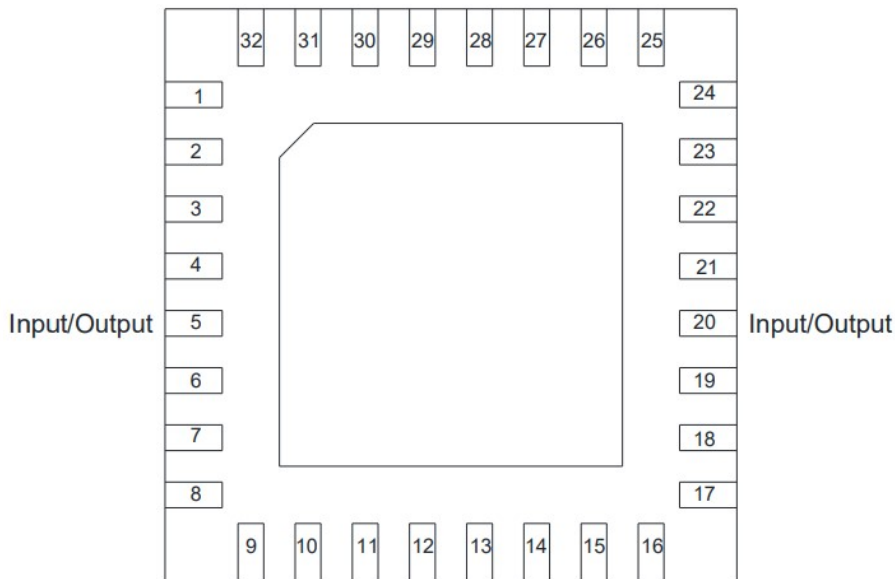

### Port Functions

| Port          | Function     | Description                                                                                         | DC Equivalent Circuit                                                                 |
|---------------|--------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Ground Paddle | Ground       | PSM package ground path is provided through the ground paddle and should be connected to RF ground. |  |
| Pin 20        | Input/Output | Pin 20 is DC short to ground for the PSM package.                                                   |  |
| Pin 5         | Input/Output | Pin 5 is DC short to ground for the PSM package.                                                    |  |

**Specifications**

**Absolute Maximum Ratings**

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

| Parameter                     | Maximum Rating | Unit |
|-------------------------------|----------------|------|
| Maximum Operating Temperature | 100            | °C   |
| Maximum Storage Temperature   | 125            | °C   |
| Minimum Operating Temperature | -55            | °C   |
| Minimum Storage Temperature   | -65            | °C   |
| Port 1 DC Current             | 80             | mA   |
| Port 2 DC Current             | 80             | mA   |

**Package Information**






| Parameter                  | Details            | Rating       |
|----------------------------|--------------------|--------------|
| ESD                        | 250 to < 500 Volts | HBM Class 1A |
| Dimensions                 | -                  | 5 x 5 mm     |
| Moisture Sensitivity Level | -                  | MSL 1        |

## Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the filter in a PSM package with a sine wave input applied to Pin 5. Min and Max limits are guaranteed at TA=+25°C.

| Parameter              | Test Conditions              | Minimum Frequency (GHz) | Maximum Frequency (GHz) | Min | Typ  | Max | Unit |
|------------------------|------------------------------|-------------------------|-------------------------|-----|------|-----|------|
| 1 dBc Passband         | Configuration A, Temp = 25°C | 8.18                    | 9.34                    | -   | -    | -   | GHz  |
| 3 dBc Passband         | Configuration A, Temp = 25°C | 7.98                    | 9.5                     | -   | -    | -   | GHz  |
| 30 dBc Rejection Point | Configuration A, Temp = 25°C | 7.58                    | 9.82                    | -   | -    | -   | GHz  |
| Center Freq            | Configuration A, Temp = 25°C | -                       | -                       | -   | 8.74 | -   | GHz  |
| Insertion Loss @ fc    | Configuration A, Temp = 25°C | -                       | -                       | -   | 3.0  | -   | dB   |
| Passband Return Loss   | Configuration A, Temp = 25°C | -                       | -                       | -   | 24   | -   | dB   |
| Group Delay            | Configuration A, Temp = 25°C | -                       | -                       | -   | 999  | -   | ps   |
| Impedance              | Configuration A, Temp = 25°C | -                       | -                       | -   | 50   | -   | Ω    |

### Typical Performance Plot

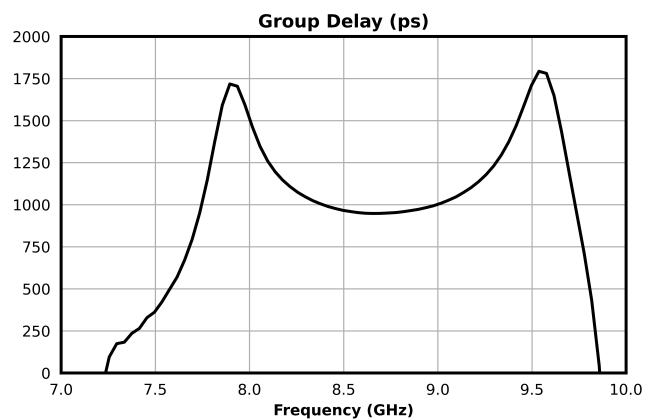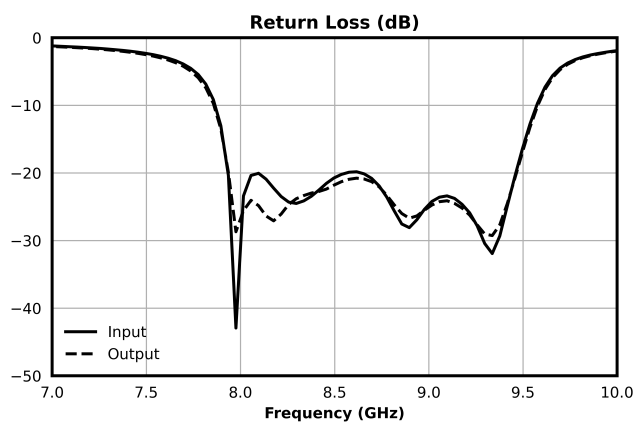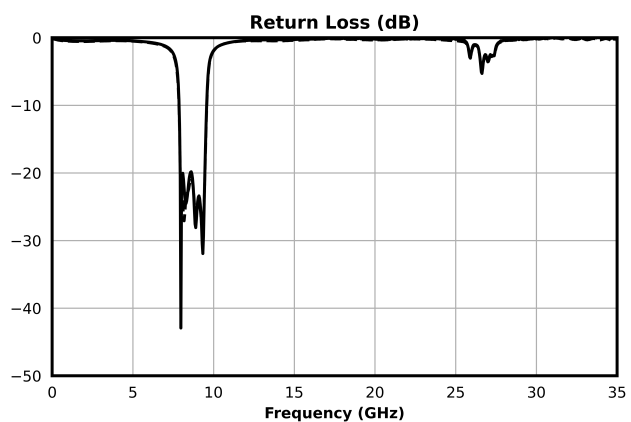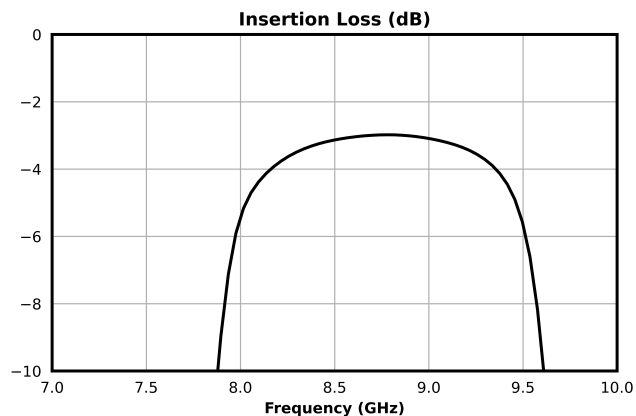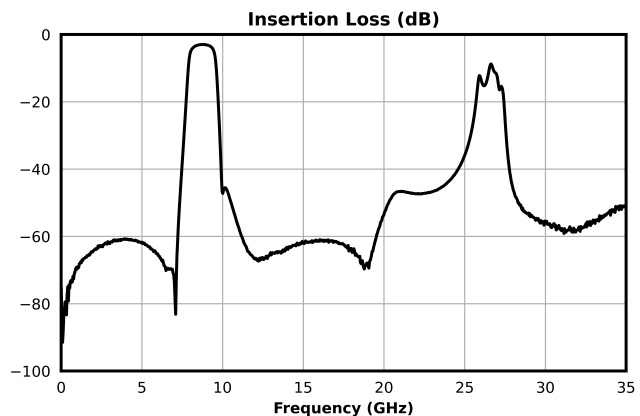

All measurements are de-embedded from the fixture with Automatic Fixture Removal (AFR).





## MFBP-00166PSM

### Passive GaAs MMIC 8.2 - 9.3 GHz Bandpass Filter

#### Footprint Image

Download : [Footprint Drawing](#)

QFN 5mm Sample Drawing  
X-Ray view

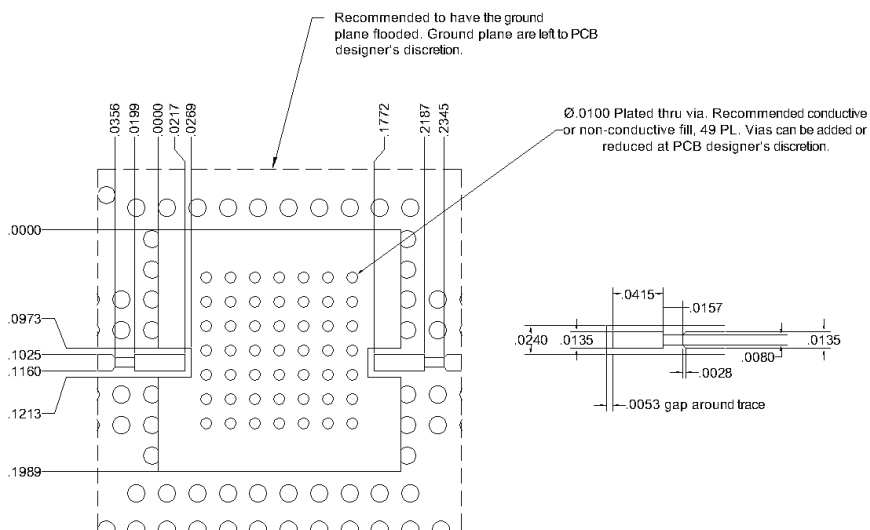

Material Rogers 4003 008"  $\frac{1}{2}$  Oz Cu both sides.



**DISCLAIMER**

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2025, Marki Microwave, Inc