


MFLP-00004PSM

Passive GaAs MMIC 15.40 GHz Lowpass Filter

DEVICE OVERVIEW

General Description

The MFLP-00004PSM is a passive MMIC surface mount 15.40 GHz lowpass filter that is an ideal solution for small form factor, high rejection filtering. Passive GaAs MMIC technology allows production of smaller filter constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances allow for less unit-to-unit variation than traditional filter technologies. The MFLP-00004PSM is available as a 4x4mm plastic QFN. Low unit to unit variation allows for accurate simulations using the provided S2P file taken from measured production units.



[Download s-parameters here](#)

Features

- Low Passband Insertion Loss with Fast Roll-off
- Excellent Return Loss
- High Stop Band Suppression

Applications

- Test and Measurement Equipment
- SATCOM
- Radar
- RF Transceivers

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MFLP-00004PSM	Passive GaAs MMIC 15.40 GHz Lowpass Filter	QFN	RoHS REACH	Released	EAR99
EVB-MFLP-00004P	Evaluation Board, Passive GaAs MMIC 15.40GHz Lowpass Filter	EVB	RoHS REACH	Released	EAR99

Table Of Contents

■ Device Overview

General Description
Features
Applications
Functional Block Diagram

■ Port Configuration and Functions

Port Diagram
Port Functions

■ Revision History

■ Specifications

Absolute Maximum Ratings
Package Information
Electrical Specifications
Typical Performance Plots
MFLP Lowpass Family Passband Comparison

■ Mechanical Data

Outline Drawing

■ Footprint Image


Revision History

Revision Code	Revision Date	Comment
-	2023-04-01	Datasheet Initial Release



Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MFLP-00004PSM package outline drawing is shown below.

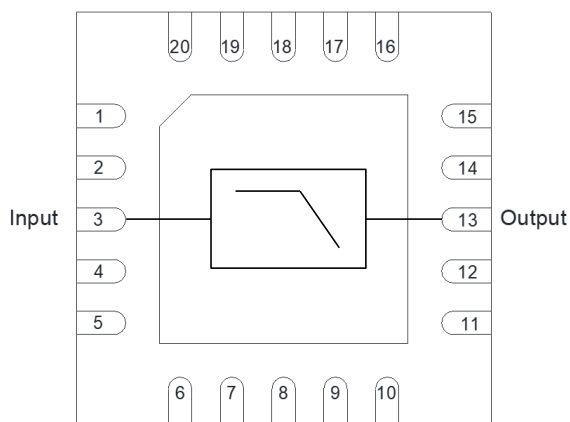

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Pad	Ground	PSM package ground path is provided through the substrate and ground bond pads.	
Pin 13	Output	Pin 13 is DC short to Pin 3.	
Pin 3	Input	Pin 3 is DC short to Pin 13.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
DC Current	320	mA
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C

Package Information

Parameter	Details	Rating
Dimensions	-	4 x 4 mm

Electrical Specifications






The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the filter in a PSM package with a sine wave input applied to Pin 3. Min and Max limits are guaranteed at TA=+25°C.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
3dBc Cutoff Frequency	-	-	-	-	15.4	-	GHz
Group Delay	-	0	15	-	73	-	ps
Passband Insertion Loss	-	0	15	-	0.6	-	dB
Passband Return Loss	-	0	15	10	21	-	dB
Stopband Suppression	-	20	40	30	49	-	dB


MFLP-00004PSM

Passive GaAs MMIC 15.40 GHz Lowpass Filter

Typical Performance Plots

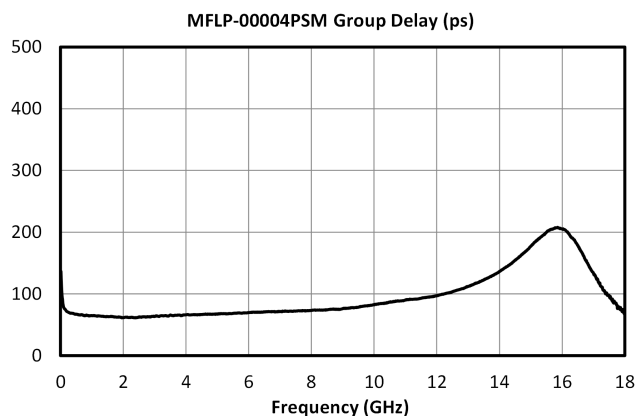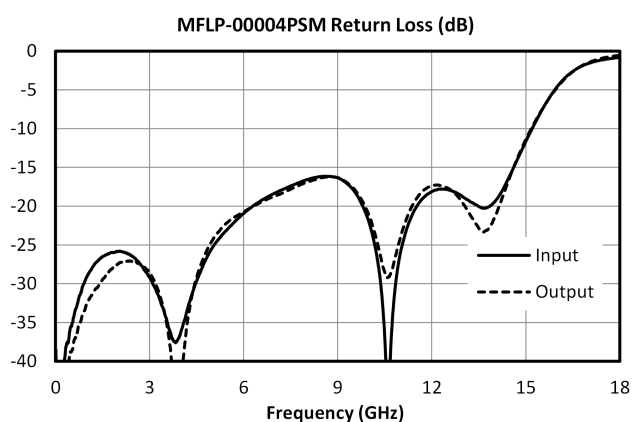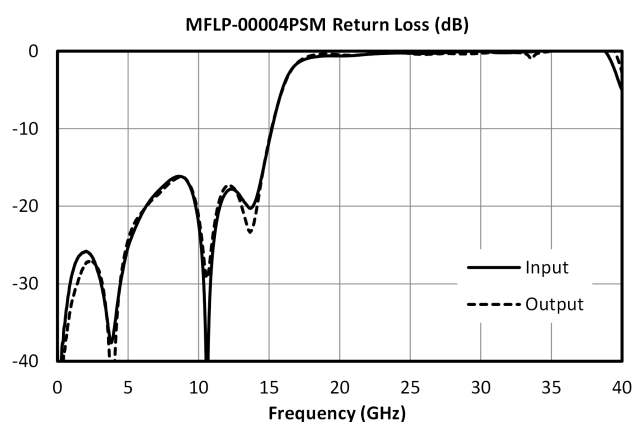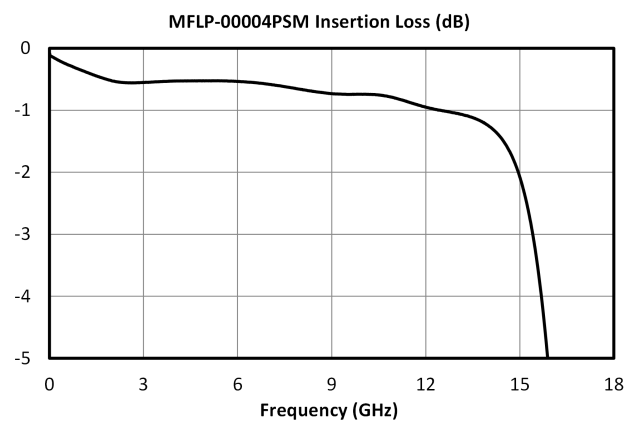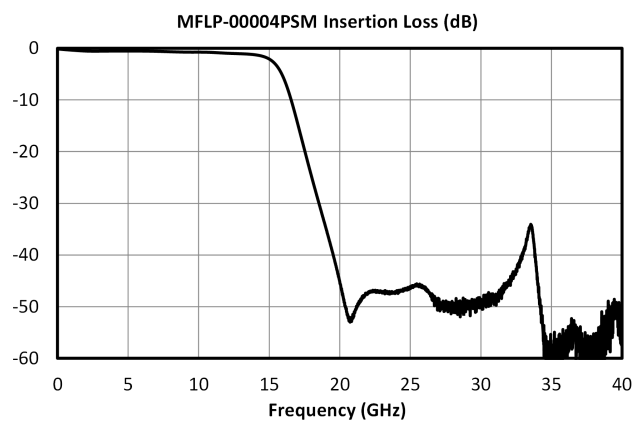

MFLP Lowpass Family Passband Comparison

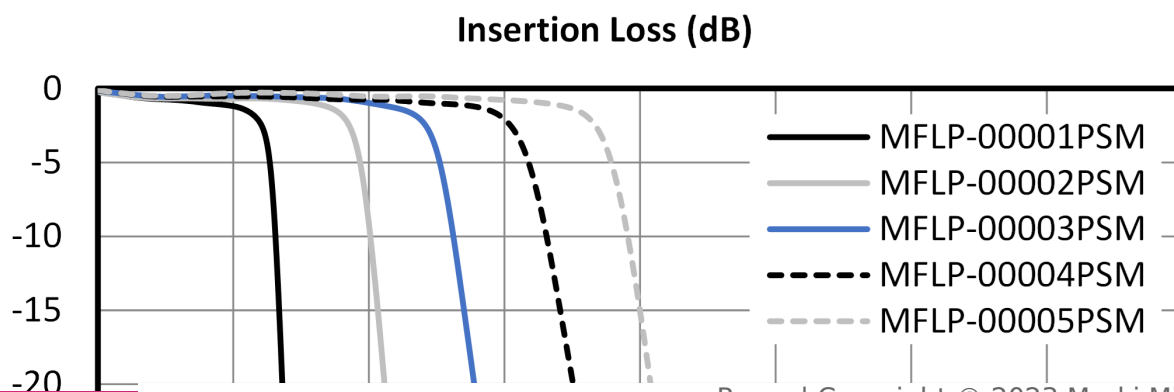


MFLP-00004PSM

Passive GaAs MMIC 15.40 GHz Lowpass Filter

Mechanical Data

Outline Drawing

Download : [Outline 2D Drawing](#) | [Outline 3D Drawing](#) | [Outline 3D STP](#)

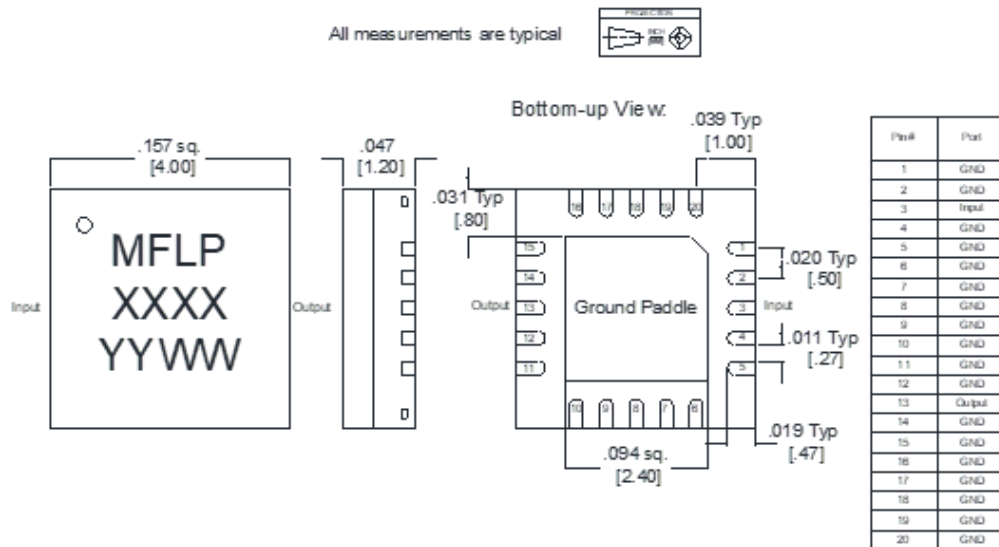

Notes (unless otherwise specified):

1. Substrate material is LCP.
2. I/O Leads and Die Paddle is (from base to finish):
Ni: 0.5um MIN
Pd: 0.02um MIN
Au: 0.05um MAX
3. All unconnected pins should be connected to PCB RF ground.



MFLP-00004PSM

Passive GaAs MMIC 15.40 GHz Lowpass Filter

Footprint Image

Download : [Footprint Drawing](#)

QFN 4mm Sample Drawing
X-Ray view


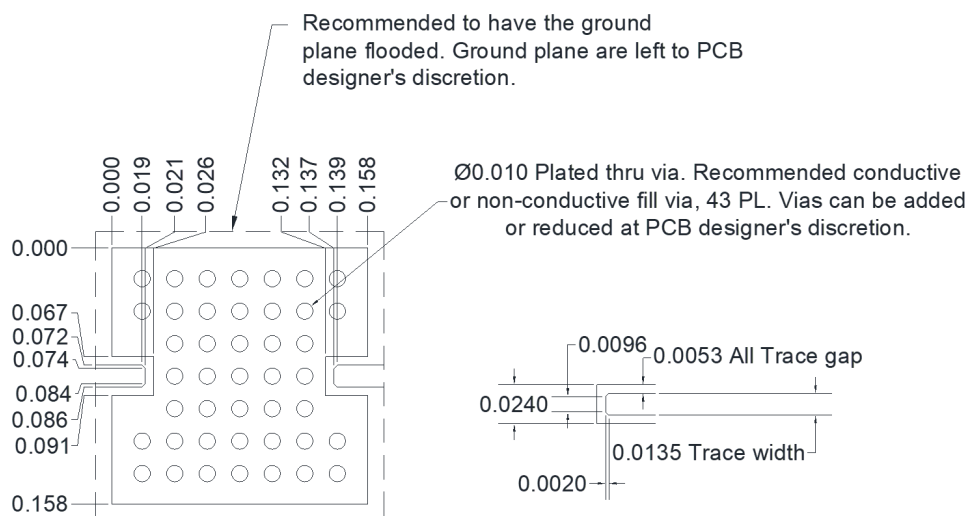



The Landing Pattern is to be used on Rogers 4003,
0.008" thick $\frac{1}{2}$ Oz Cu.

MFLP-00004PSM

Passive GaAs MMIC 15.40 GHz Lowpass Filter

All measurements are typical

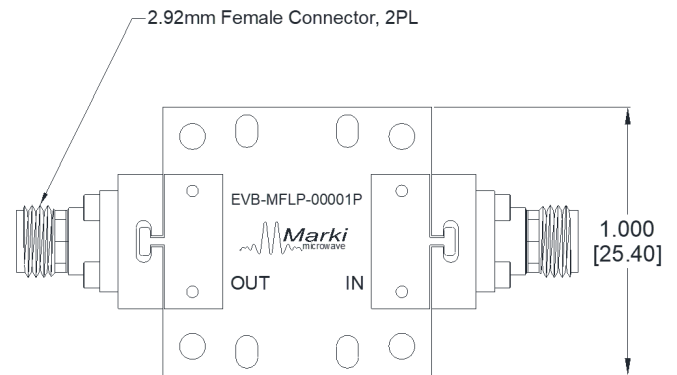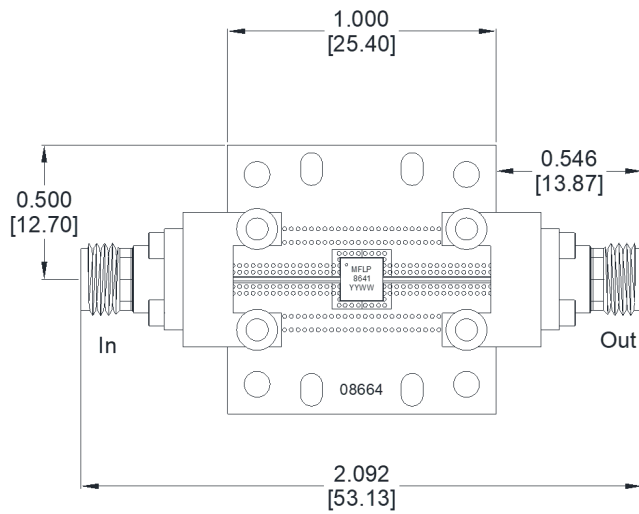

MFLP-00004PSM

Passive GaAs MMIC 15.40 GHz Lowpass Filter

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2023, Marki Microwave, Inc