


MMD-1030LCSM

GaAs MMIC Doubler

DEVICE OVERVIEW

General Description

The MMD-1030LCSM is a MMIC doubler fabricated with GaAs Schottky diodes. This part operates over a 5 to 15 GHz input frequency range or a doubled output frequency range of 10 to 30 GHz. It features excellent conversion loss, superior isolations, and harmonic suppressions across a broad bandwidth. It is available as a 3x3mm QFN and connectorized evaluation board.




Features

- High Fundamental Rejection
- Low 2F Conversion Loss
- Low Input Drive

Applications

- Test and Measurement Equipment
- LO signal chain
- High frequency synthesis

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MMD-1030LCSM	GaAs MMIC Doubler	QFN	-	RoHS	Released	EAR99
EVB-MMD-1030LC	Evaluation Board, GaAs MMIC 10 - 30 GHz Doubler	-	-	RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**


Revision History

Revision Code	Revision Date	Comment
-	2023-02-01	Datasheet Initial Release



Port Configuration and Functions

Port Diagram

A top-down x-ray view of the MMD-1030LCSM's CSM package outline drawing is shown below. The MMD-1030LCSM should only be used in the forward direction, with the input and output ports given in Port Functions.

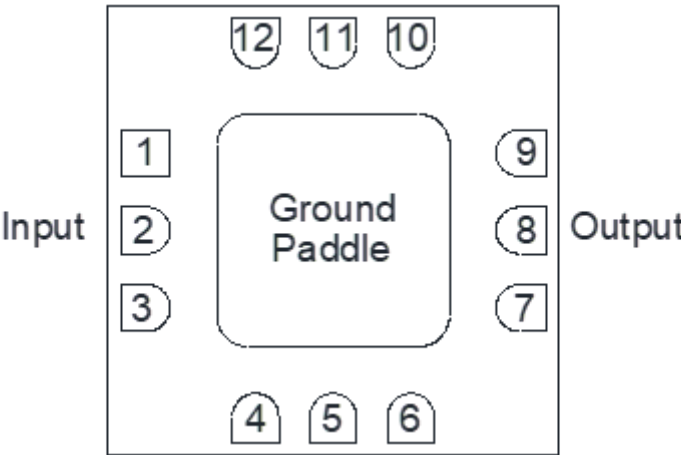

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	CSM Package ground path is provided through the ground paddle.	
Pin 2	1F Input	Input 1x Frequency Port. Pin 2 is DC open, and AC matched to 50 Ohms from 5 to 15 GHz for the CSM Package.	
Pin 8	2F Output	2x Input Frequency output port. Pin 8 is DC open, and AC matched to 50 Ohms from 10 to 30 GHz for the CSM package.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. All Absolute Maximum Ratings are individual and should not be met in parallel. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Power Handling, at any Port (100°C)	20	dBm
Power Handling, at any Port (25°C)	25	dBm

Package Information

Parameter	Details	Rating
Weight	Package name: QFN	10g
Dimensions	-	2.90 x 2.90 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Input Power	5	7	11	dBm
Operating Temperature	-55	25	100	°C

Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode doubler that requires no DC bias.

Electrical Specifications







The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the connectorized EVB package doubler used in the forward direction with a +7 dBm sine wave input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C.


Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss	Second Harmonic Output	10	30	-	12.5	16	dB
Input Frequency Range	-	-	-	5	-	15	GHz
Input Power	-	-	-	5	7	11	dBm
Isolation, 1F ¹	Input = 5 - 15 GHz Output = 5 - 15 GHz	5	15	-	44	-	dB
Isolation, 3F ²	Input = 5 - 10 GHz Output = 15 - 30 GHz	15	30	-	56	-	dB
Isolation, 4F ³	Input = 5 - 7.5 GHz Output = 20 - 30 GHz	20	30	-	31	-	dB
Output Frequency Range	-	-	-	10	-	30	GHz
Suppression, 1F ⁴	Input = 5 - 15 GHz Output = 5 - 15 GHz	5	15	-	31	-	dBc
Suppression, 3F ⁵	Input = 5 - 10 GHz Output = 15 - 30 GHz	15	30	-	43	-	dBc
Suppression, 4F ⁶	Input = 5 - 7.5 GHz Output = 20 - 30 GHz	20	30	-	17	-	dBc

^{[1][2][3]} Isolation is defined as the harmonic power relative to the 1F fundamental input power.

^{[4][5][6]}Suppressions and isolations measured with an input source with >60dBc (relative to fundamental input) harmonic suppression. Suppression is defined as the harmonic power relative to the 2F doubled output power.


Typical Performance Plots

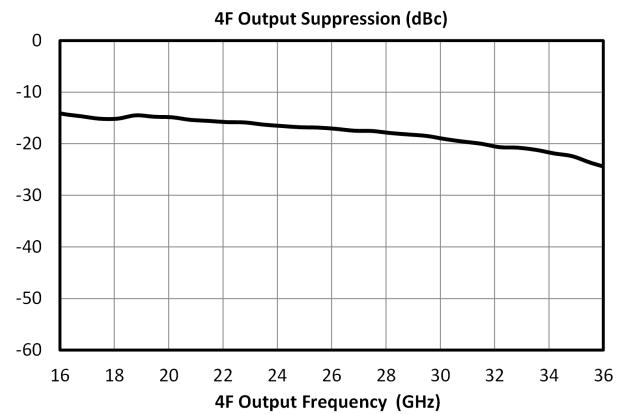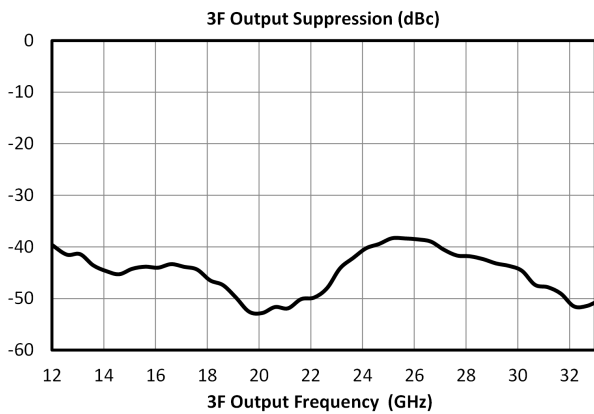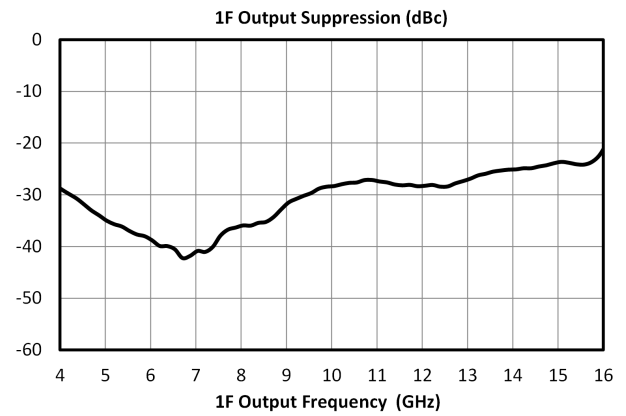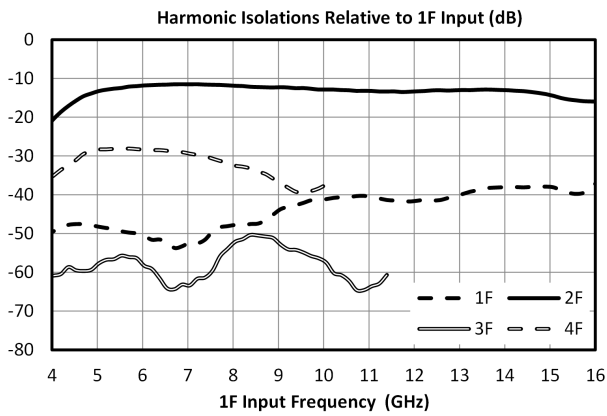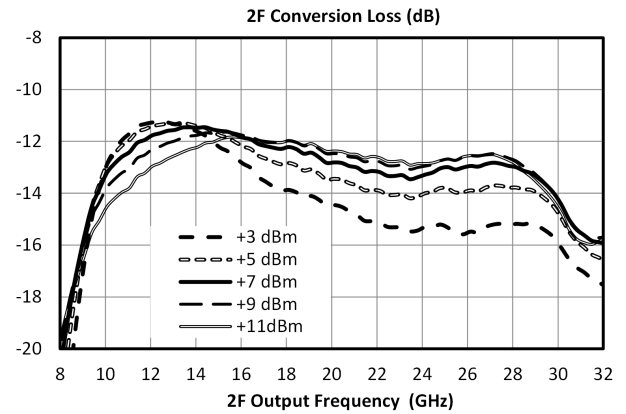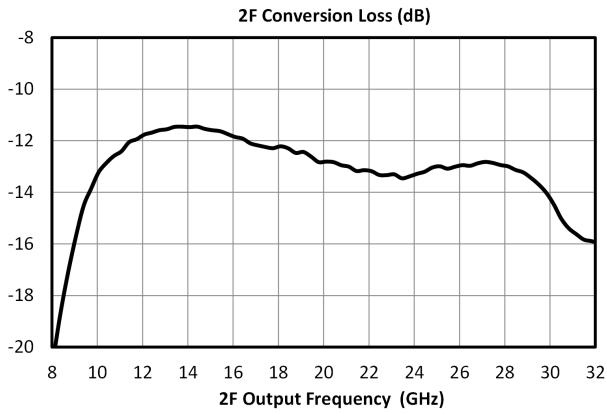

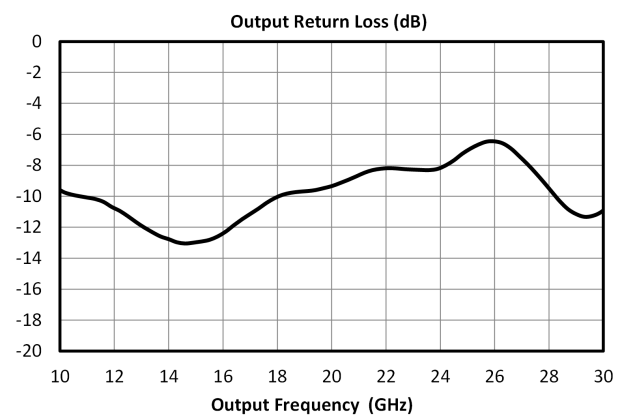



Mechanical Data

Outline Drawing

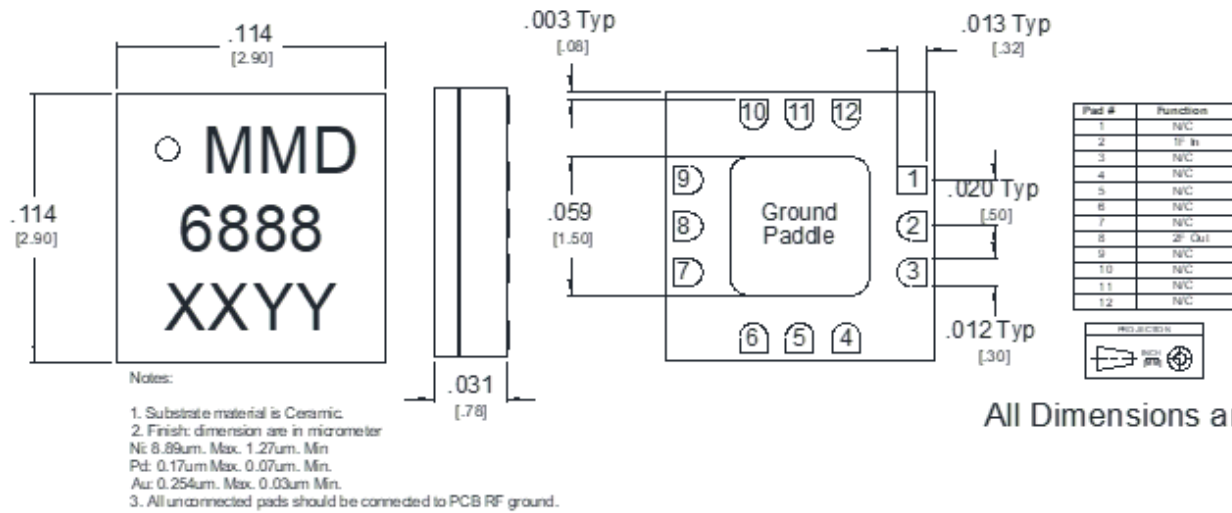


Footprint Image

QFN 3mm Sample Drawing
X-Ray view

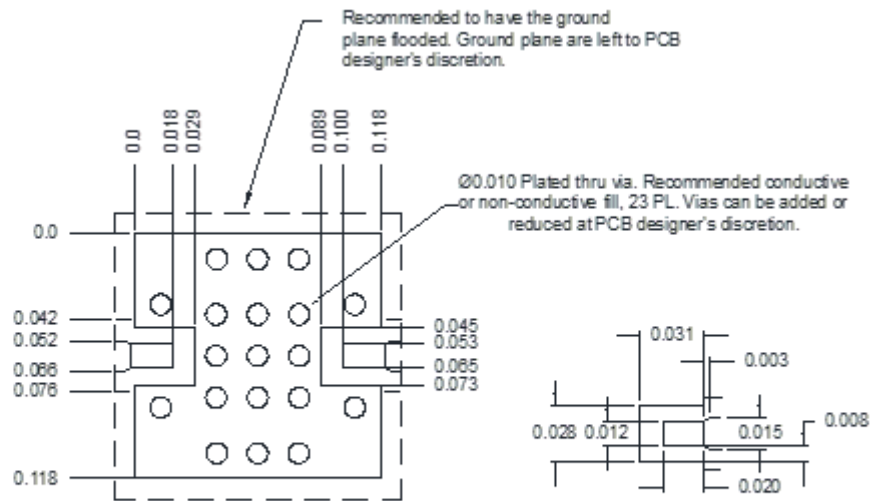

The landing pattern is to be used on 0.005" thick Taconic TLY-5
½ Oz Electro-Deposited CU Both Side.

Ports	Connector Type
F	SMA Female
2F	2.92mm Female
Note: EVB connectors are not removable	

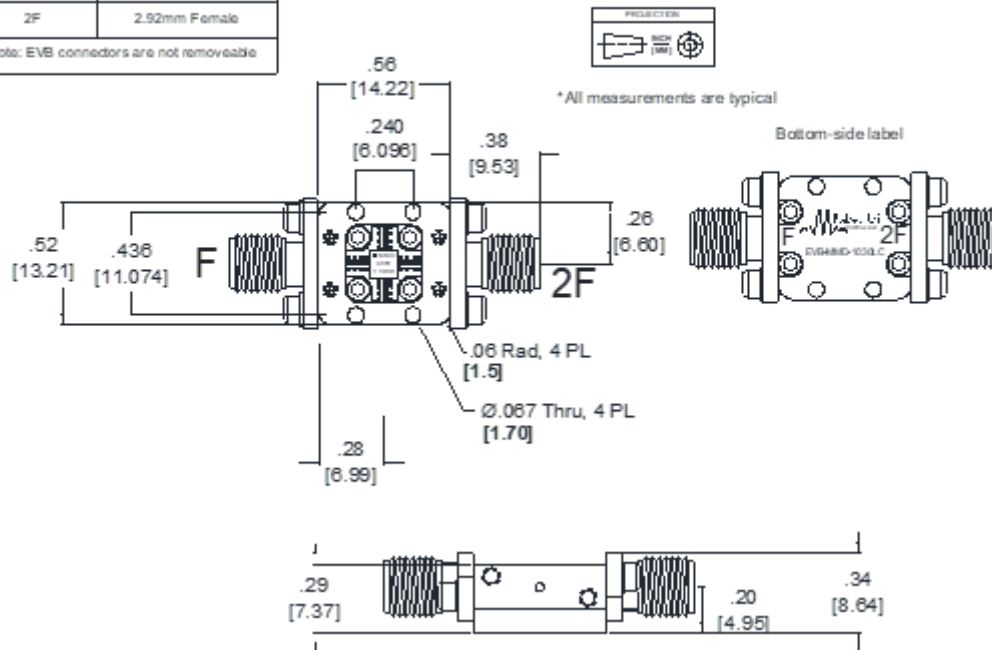

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2023, Marki Microwave, Inc