

MMD-1648LS

High Isolation GaAs MMIC Doubler

DEVICE OVERVIEW

General Description

The MMD-1648L is a balanced MMIC doubler covering 16 to 48 GHz on the output. It features superior isolations and harmonic suppressions across a broad bandwidth in a highly miniaturized form factor. Accurate, nonlinear simulation models are available for Microwave Office® through the Marki Microwave PDK. The MMD-1648L is available as a wire bondable chip or a connectorized package. The MMD-1648L is a superior alternative to Marki Microwave carrier and packaged doublers.




Features

- Compact Chip Style Package (0.058" x 0.096"x0.004")
- CAD Optimized for Superior Suppressions and Efficiency
- Broadband Performance
- Excellent Unit-to-Unit Repeatability
- Fully nonlinear software models available with Marki PDK for Microwave Office®
- RoHS Compliant

Applications

N/A

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MMD-1648LS	High Isolation GaAs MMIC Doubler	S	-	RoHS	Released	EAR99

Table Of Contents


- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing

Revision History



Revision Code	Revision Date	Comment
-	2016-08-01	Initial Release
A	2019-09-01	Added CH Package Dimensions
B	2020-01-01	Die Shrink

Port Configuration and Functions

Port Diagram

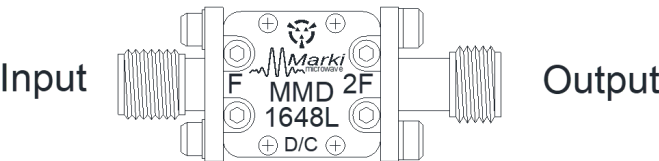

Port Functions

Port	Function	Description	Equivalent Circuit for Package
2F	Output	2x Input Frequency output port. The output port is DC open and AC matched to 50 Ohms from 16 to 48 GHz. Blocking capacitor is optional.	
F	Input	Input 1x Frequency Port. The input port is DC open and AC matched to 50 Ohms from 8 to 24 GHz. Blocking capacitor is optional.	

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
RF Power Handling (RF+LO), 100°C	20	dBm
RF Power Handling (RF+LO), 25°C	25	dBm

Package Information

Parameter	Details	Rating
Dimensions	-	14.22 x 13.21 mm

Electrical Specifications







Specifications guaranteed from -55 to +100°C, measured in a 50Ω system. All bare die are 100% DC tested and 100% visually inspected. RF testing is performed on a sample basis to verify conformance to datasheet guaranteed specifications. Consult factory for more information.







Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
5F (out) Fourth Harmonic Suppression ¹	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	16	48	-	58	-	dBc
Conversion Loss	Second Harmonic Output	16	48	-	15	20	dB
Isolation, 1F ²	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	8	24	-	59	-	dB
Isolation, 3F ³	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	16	48	-	85	-	dB
Isolation, 4F ⁴	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	16	48	-	33	-	dB
Isolation, 5F ⁵	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	16	48	-	57	-	dB
Suppression, 1F ⁶	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	8	24	-	44	-	dBc
Suppression, 3F ⁷	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	16	48	-	69	-	dBc
Suppression, 4F ⁸	Input = 8 - 24 GHz Output = 16 - 48 GHz Diode Option Input drive level = 10 - 15 dBm	16	48	-	33	-	dBc
Input Frequency Range	-	-	-	8	-	24	GHz
Output Frequency Range	-	-	-	16	-	48	GHz


[1][6][7][8] Suppression is relative to 2F doubled output power.

[2][3][4][5] Isolation is defined as relative to the 1F fundamental input power.

Typical Performance Plots

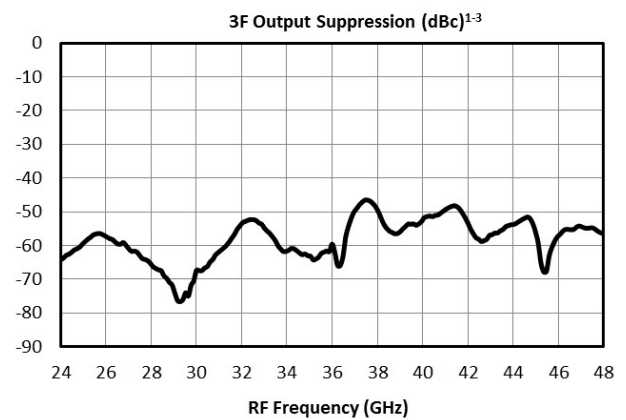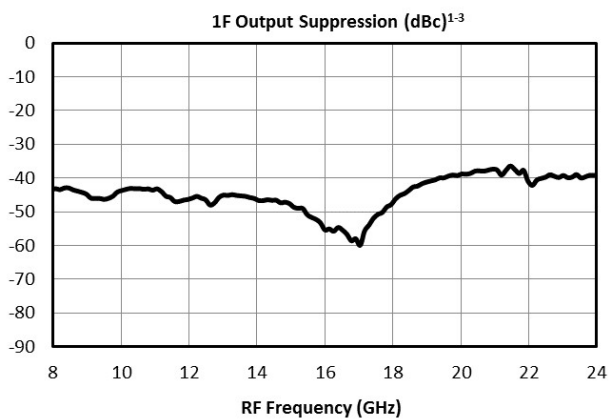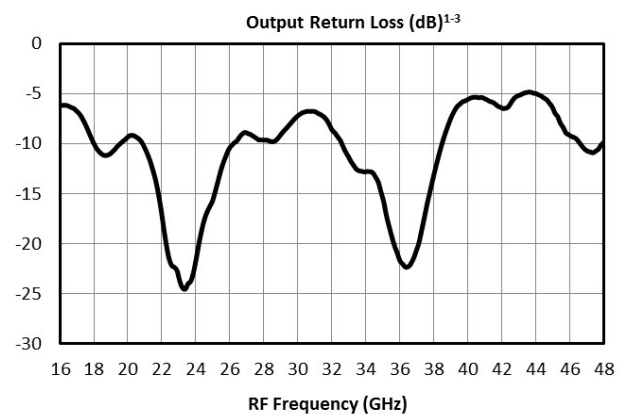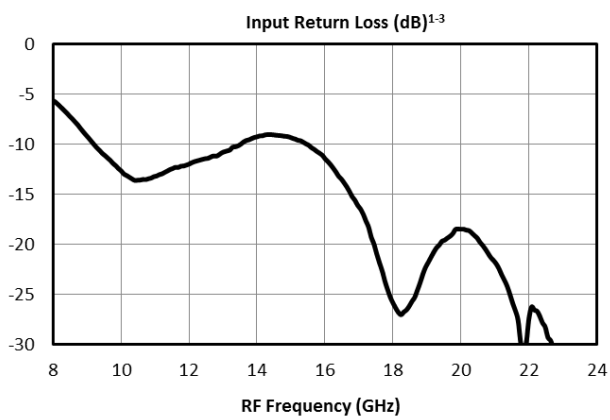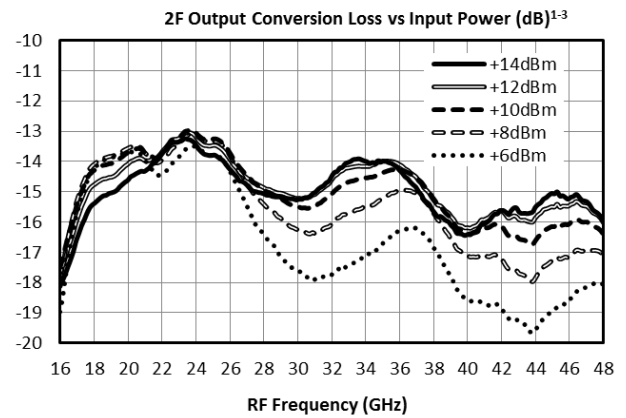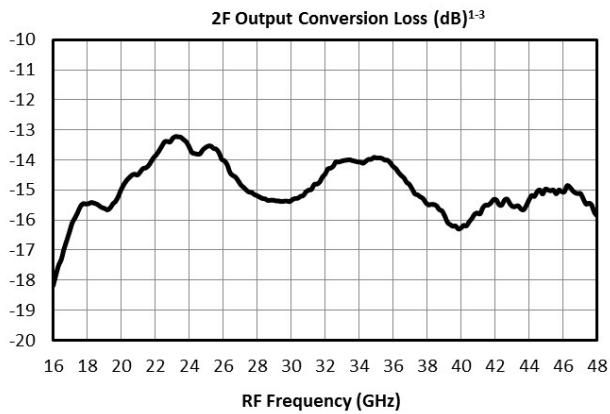

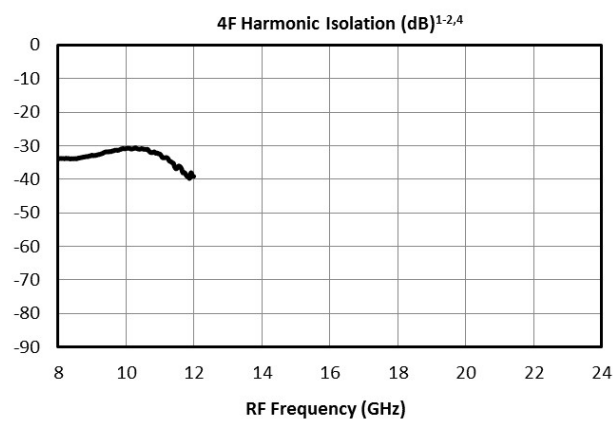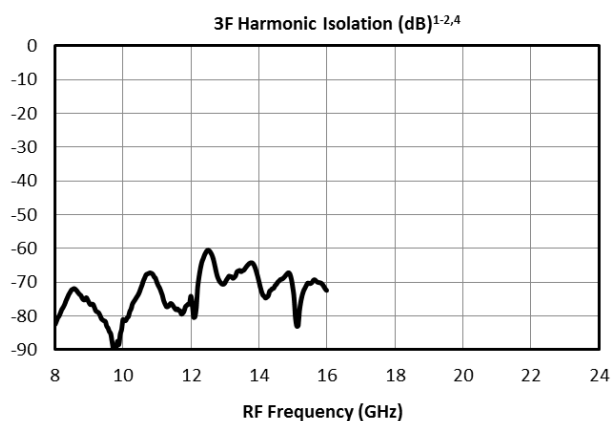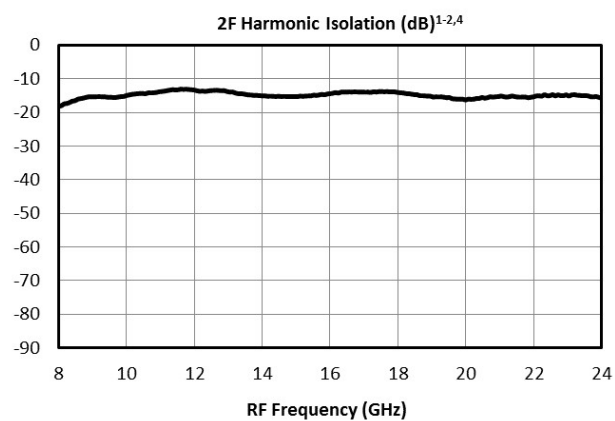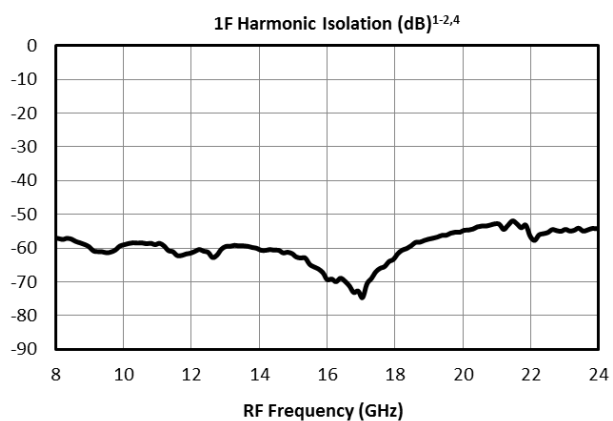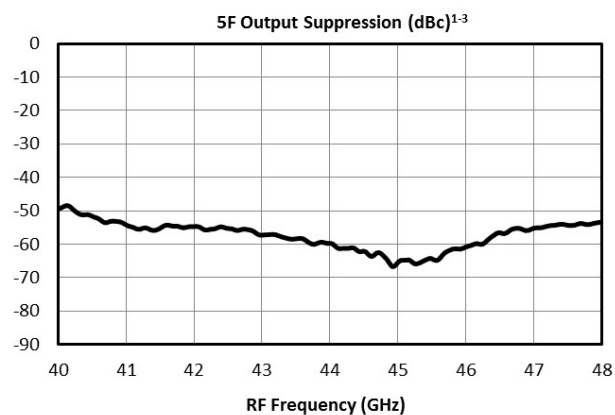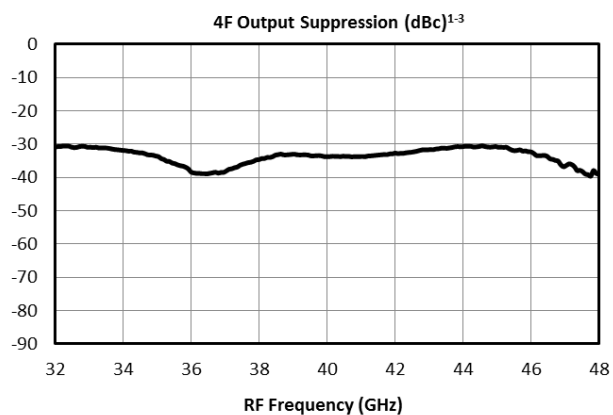

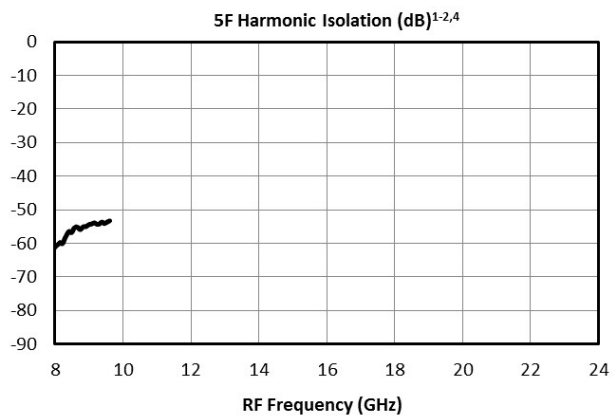


MMD-1648LS

High Isolation GaAs MMIC Doubler

Mechanical Data

Outline Drawing

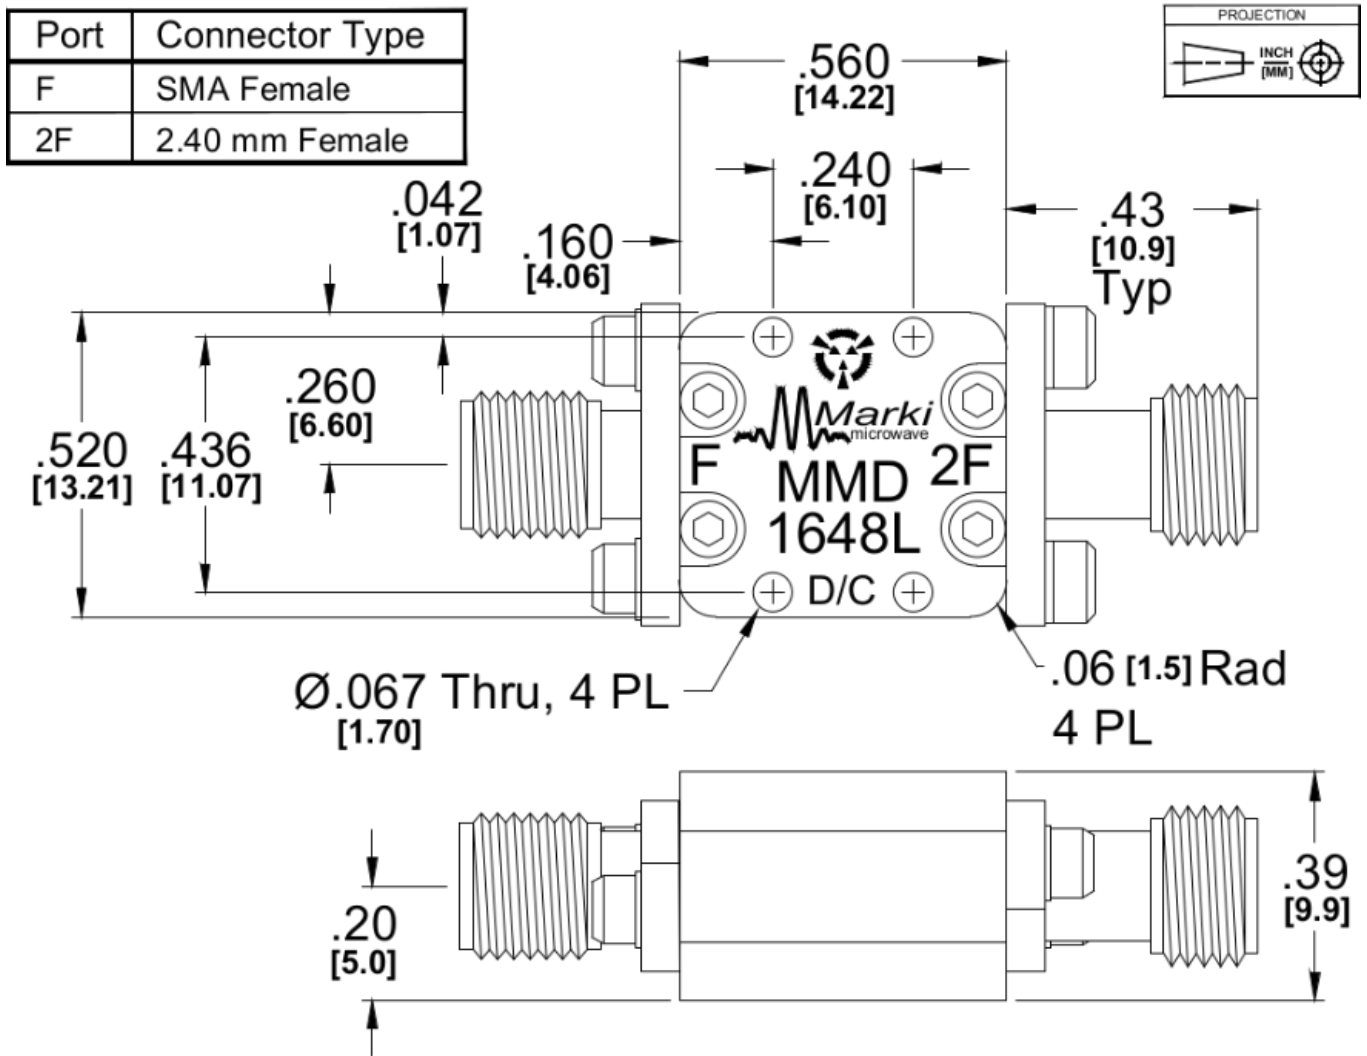

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2016, 2019 - 2020, Marki Microwave, Inc