


MMD-2050HSM

GaAs MMIC Millimeter Wave Doubler

DEVICE OVERVIEW

General Description

The MMD-2050HSM is a passive MMIC millimeter wave doubler fabricated with GaAs Schottky diodes. This operates over a guaranteed 10 to 25 GHz input frequency range or a doubled output frequency range of 20 to 50 GHz. It features excellent conversion loss, superior isolations, and high harmonic suppressions across a broad bandwidth. Both surface mount QFN and evaluation boards are available.




Features

- High fundamental rejection
- Millimeter wave output frequencies
- RoHS Compliant
- +10dBm to +15dBm LO drive

Applications

- High frequency synthesis
- LO signal chain

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
EVAL-MMD-2050H	Evaluation Board, GaAs MMIC 20 - 50 GHz Millimeter Wave Doubler	-	-	RoHS	Released	EAR99
MMD-2050HSM	GaAs MMIC Millimeter Wave Doubler	QFN	-	RoHS	Released	EAR99

Table Of Contents


- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**

Revision History



Revision Code	Revision Date	Comment
-	2020-02-01	Initial Release

Port Configuration and Functions

Port Diagram

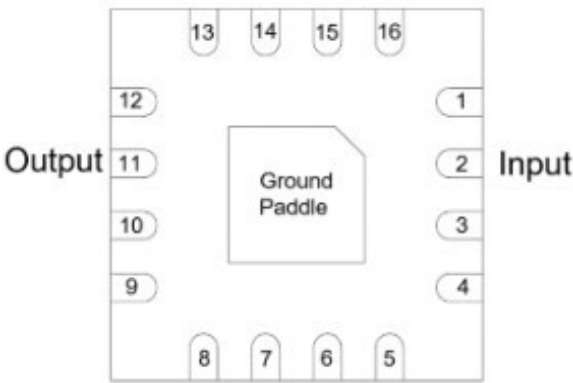

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	SM package ground path is provided through the ground paddle.	
Pin 11	2F Output	2x Input Frequency output port. Pin 11 is DC open and AC matched to 50 Ohms from 20-50GHz	
Pin 2	1F Input	Input 1x Frequency Port. Pin 2 is diode coupled and AC matched to 50 Ohms from 10-25GHz	

Specifications

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
RF Maximum Power	29	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Dimensions	-	3x3 mm


Electrical Specifications






Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss	Second Harmonic Output	10	25	-	12.5	16	dB
Input Frequency Range	-	-	-	10	-	25	GHz
Input Power	-	-	-	10	-	15	dBm
Isolation, 1F ¹	Input=10-25 GHz Output=10-25 GHz	10	25	40	45	-	dB
Isolation, 3F ²	Input=10-17 GHz Output=30-51 GHz	30	51	42	53	-	dB
Isolation, 4F ³	Input=10-12.5 GHz Output=40-50 GHz	40	50	22	24.5	-	dB
Output Frequency Range	-	-	-	20	-	50	GHz
Suppression, 1F ⁴	Input=10-25 GHz Output=10-25 GHz	10	25	25	33	-	dBc
Suppression, 3F ⁵	Input=10-17 GHz Output=30-51 GHz	30	51	30	40	-	dBc
Suppression, 4F ⁶	Input=10-12.5 GHz Output=40-50 GHz	40	50	8	10.5	-	dBc

^{[1][2][3]} Isolation is defined as the harmonic power relative to the 1F fundamental input power.

^{[4][5][6]} Suppressions and isolations measured with an input source with >60dBc (relative to fundamental input) harmonic suppression. Suppression is defined as the harmonic power relative to the 2F doubled output power.

Typical Performance Plots

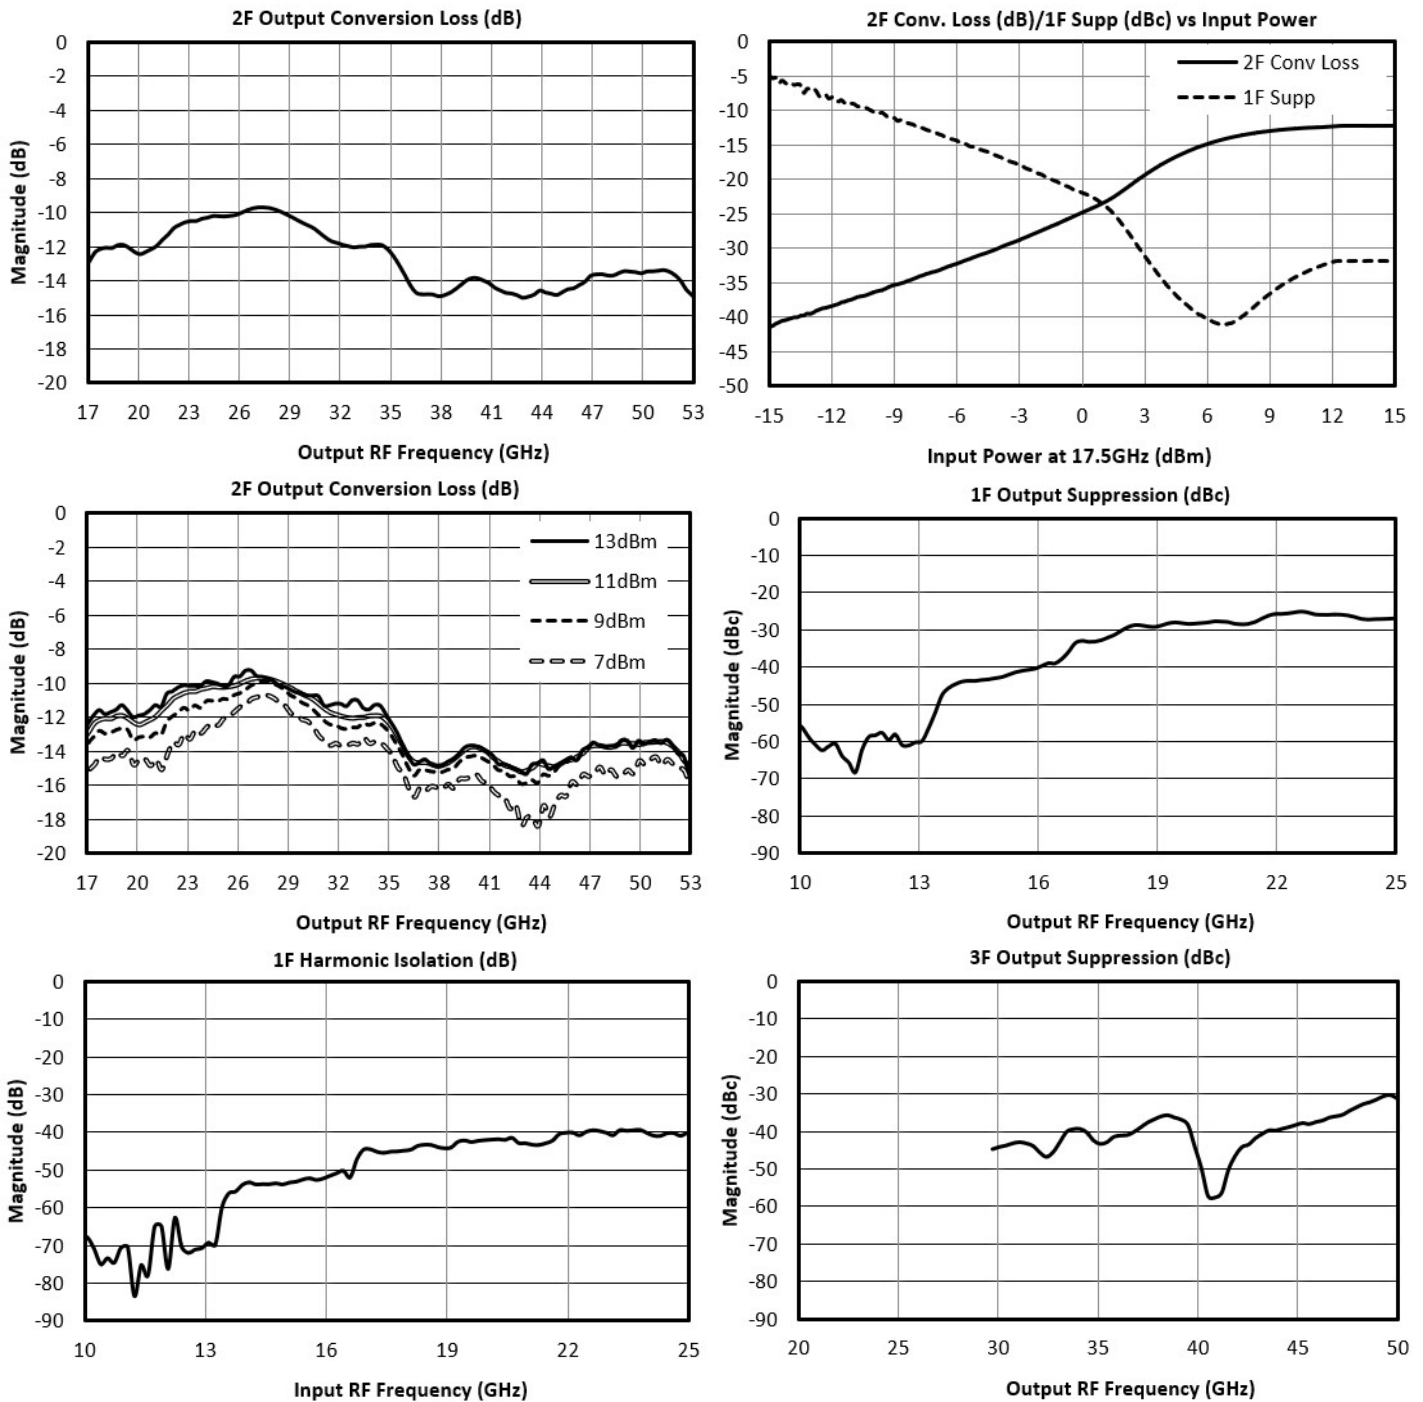

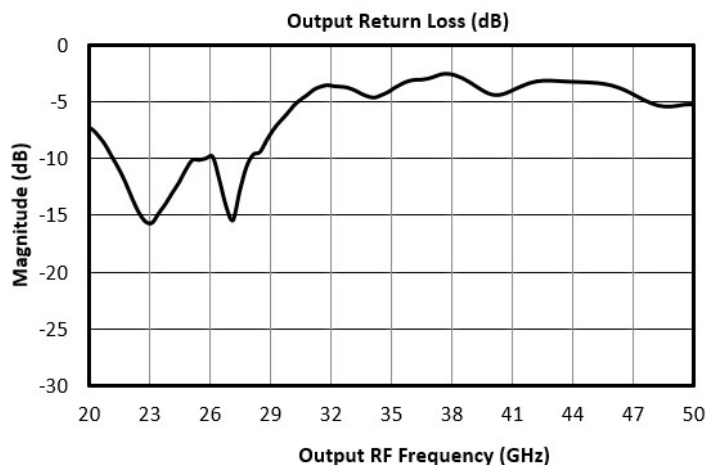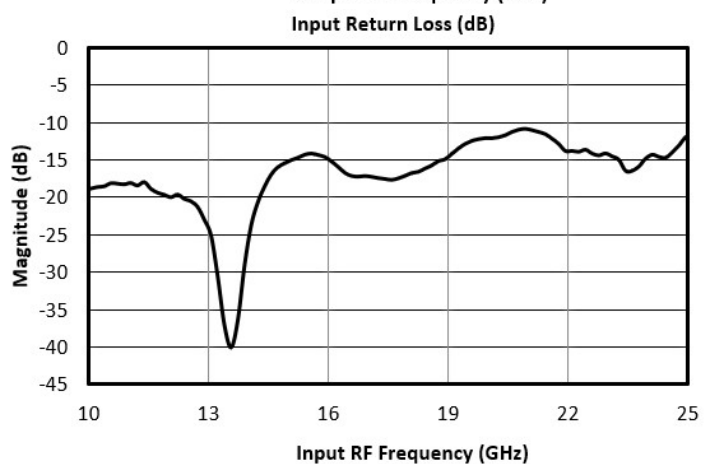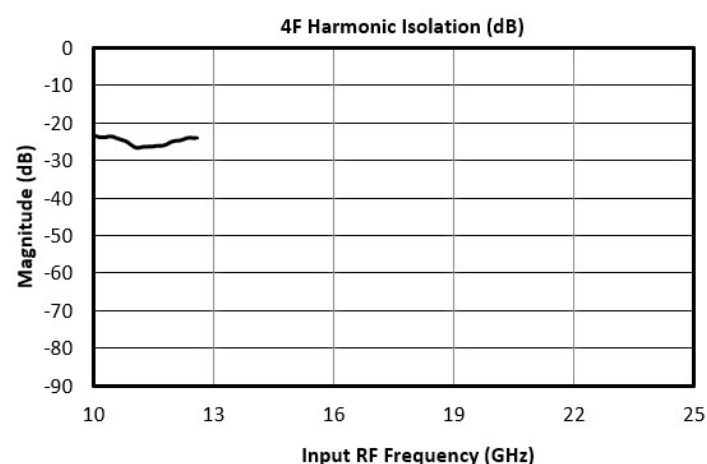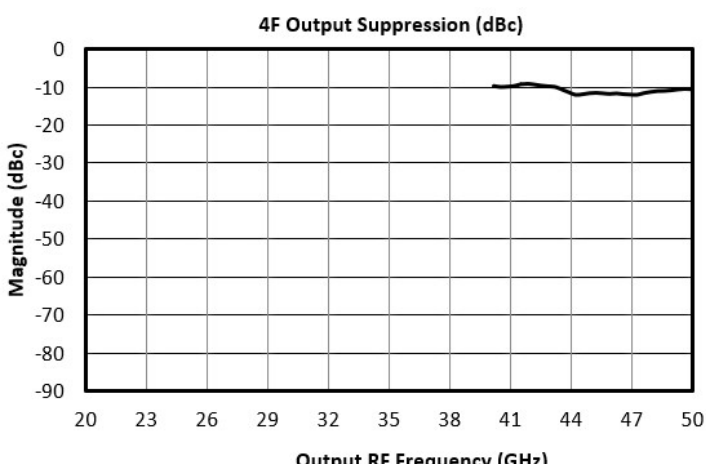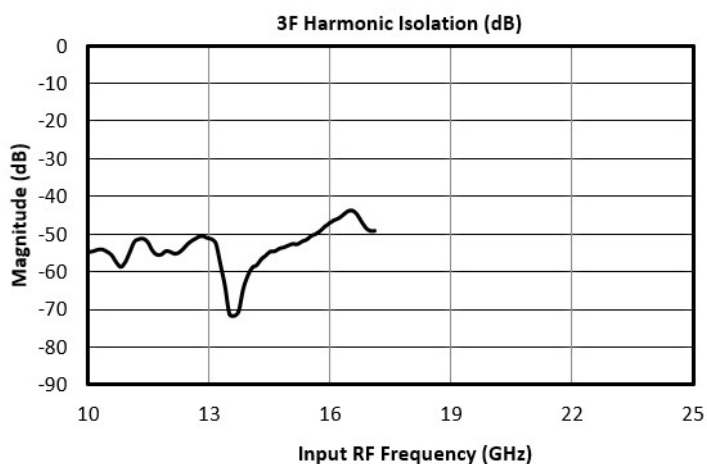


MMD-2050HSM

GaAs MMIC Millimeter Wave Doubler


Mechanical Data

Outline Drawing

Pin #	Connection
1	N/C
2	Input
3	N/C
4	N/C
5	N/C
6	N/C
7	N/C
8	N/C
9	N/C
10	N/C
11	Output
12	N/C
13	N/C
14	N/C
15	N/C
16	N/C

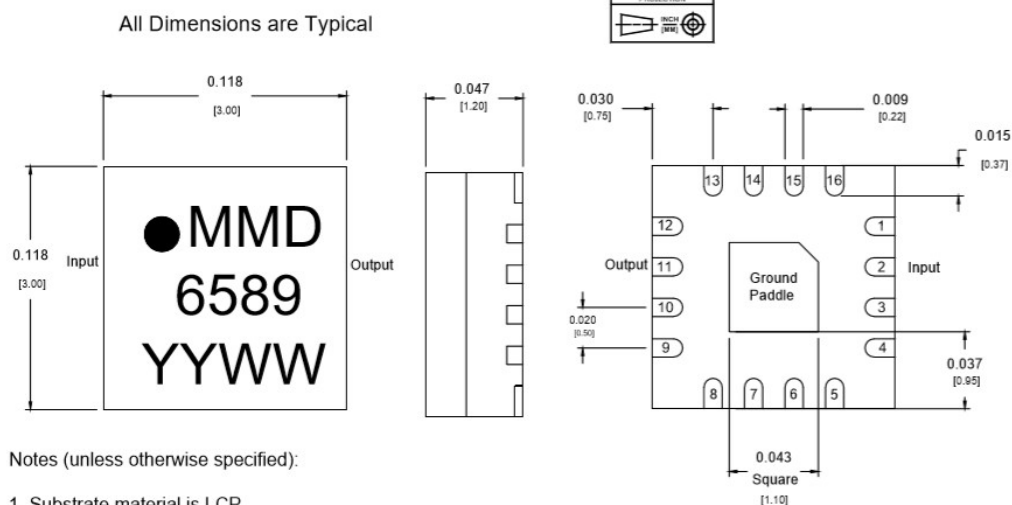


Footprint Image

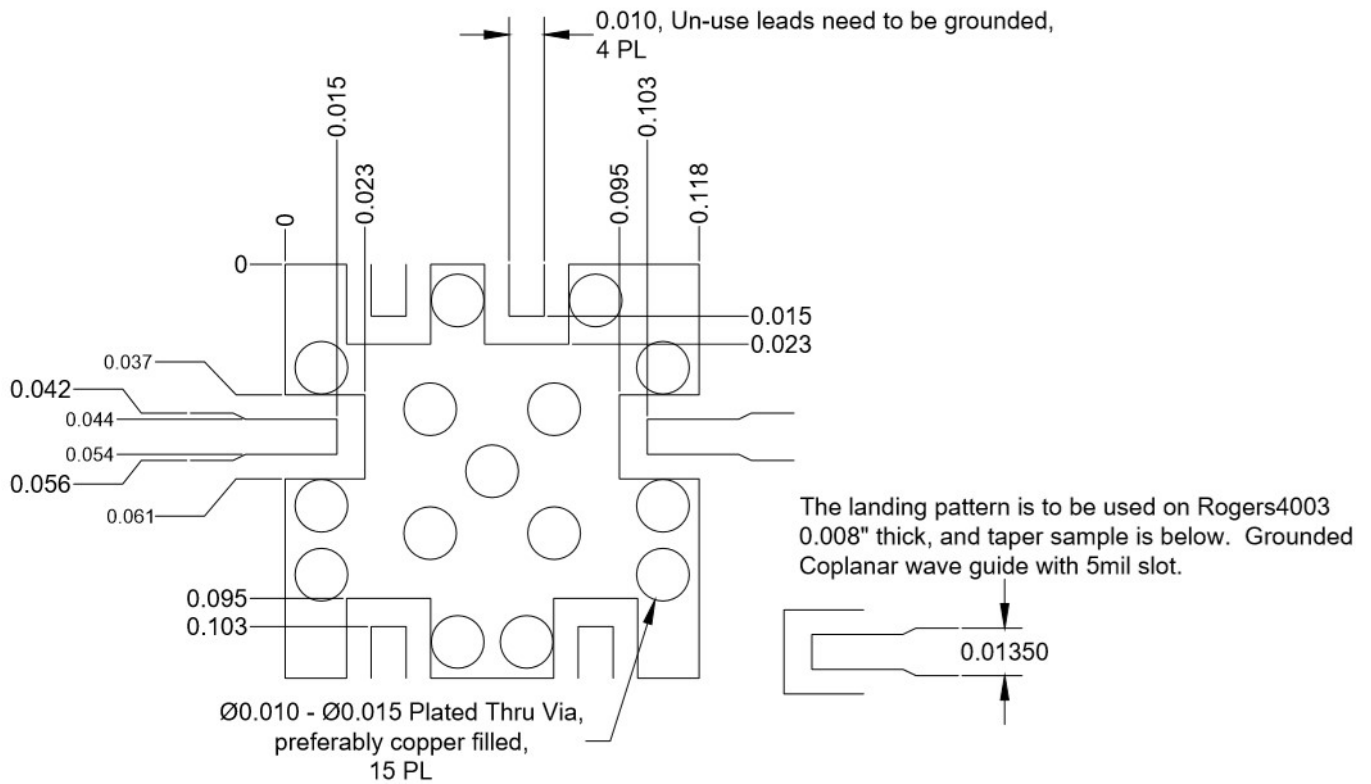

GaAs MMIC Millimeter Wave Doubler



Port	Connector Type
1F	2.92mm Female
2F	2.40mm Female

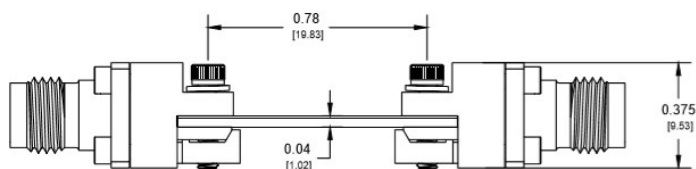

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020, Marki Microwave, Inc