


MMD-3580LU-KW

GaAs MMIC Millimeter Wave Doubler

DEVICE OVERVIEW

General Description

The MMD-3580L is a MMIC millimeter wave doubler fabricated with GaAs Schottky diodes. This operates over a guaranteed 17.5 to 40 GHz input frequency range or a doubled output frequency range of 35 to 80 GHz. The die version, MMD-3580LCH, is capable of operating beyond 80GHz. Both the wire bondable die and connectorized units are available. The MMD-3567L is a bandlimited version of this doubler.




Features

- High fundamental rejection
- Millimeter wave output frequencies
- Low +7 dBm minimum input drive

Applications

- High frequency synthesis
- LO signal chain

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
MMD-3580LU-KW	GaAs MMIC Millimeter Wave Doubler	U	-	RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Recommended Operating Conditions
 - Sequencing Requirements
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing


Revision History

Revision Code	Revision Date	Comment
-	2018-01-01	Datasheet Initial Release
A	2019-02-01	Updated output return loss




Port Configuration and Functions

Port Diagram

The MMD-3580L should only be used in the forward direction, with the input and output ports given in Port Functions.

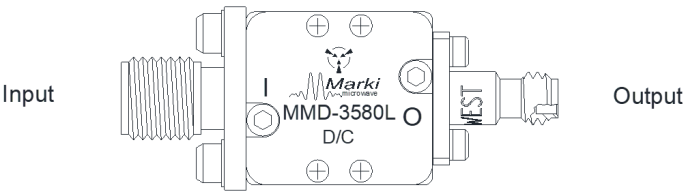

Port Functions

Port	Function	Description	Equivalent Circuit for Package
GND	Ground	U package ground provided through metal housing and outer coax conductor.	
Port 1	Input	Input 1x Frequency Port. Port 1 is DC open for the CH and U package	
Port 2	Output	2x Input Frequency output port. Port 2 is DC open for the CH and U package.	

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Power Handling, at any Port	23	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: U	10g
Dimensions	-	14.22 x 13.21 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Input Power	7	-	11	dBm
Ambient Temperature	-55	25	100	°C

Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode doubler that requires no DC bias.

Electrical Specifications







The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the connectorized U package doubler used in the forward direction with a +8 dBm sine wave input.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Conversion Loss	Second Harmonic Output	67	80	-	12	-	dB
Conversion Loss	Second Harmonic Output	35	67	-	11	15	dB
Input Frequency Range	-	-	-	17.5	-	40	GHz
Input Power	-	-	-	7	-	11	dBm
Isolation, 1F ¹	Input=17.5-40 GHz Output=17.5-40 GHz	17.5	40	-	47.7	-	dB
Isolation, 3F ²	Input=17.5-22.3 GHz Output=52.5-67 GHz	52.5	67	-	54.4	-	dB
Isolation, 4F ³	Input=15-16.8 GHz Output=60-67 GHz	60	67	-	31	-	dB
Output Frequency Range	-	-	-	35	-	80	GHz
Suppression, 1F ⁴	Input=17.5-40 GHz Output=17.5-40 GHz	17.5	40	-	38	-	dBc
Suppression, 3F ⁵	Input=17.5-22.3 GHz Output=52.5-67 GHz	52.5	67	-	44	-	dBc
Suppression, 4F ⁶	Input=15-16.8 GHz Output=60-67 GHz	60	67	-	21	-	dBc




[1][2][3] Isolation is defined as the harmonic power relative to the 1F fundamental input power.

[4][5][6]Suppressions and isolations measured with an input source with >70dBc (relative to fundamental input) harmonic suppression. Suppression is defined as the harmonic power relative to the 2F doubled output power.

Typical Performance Plots

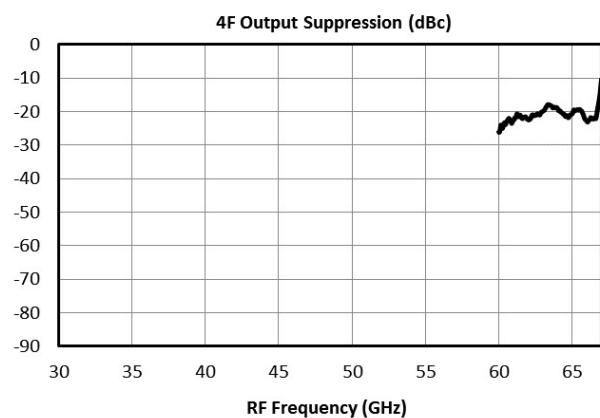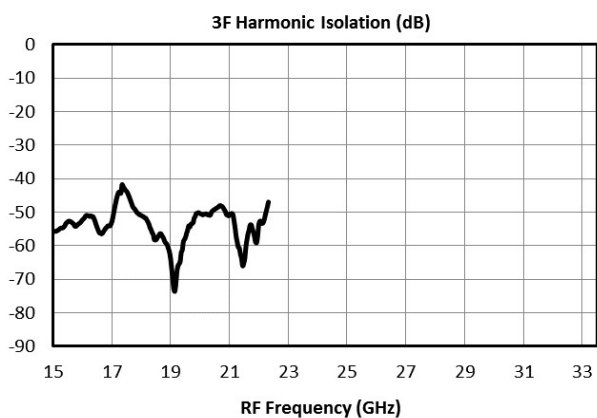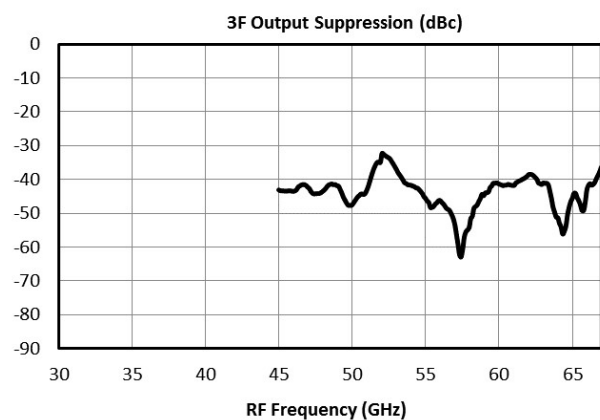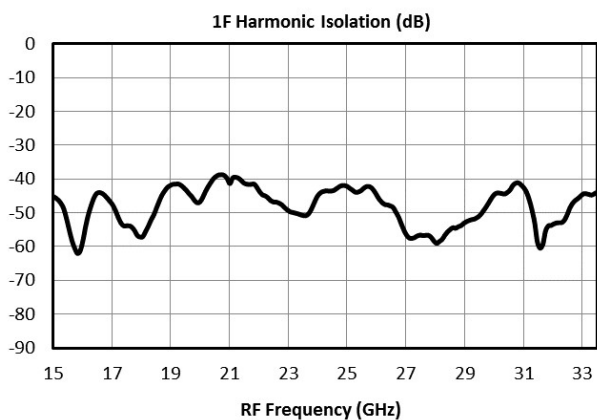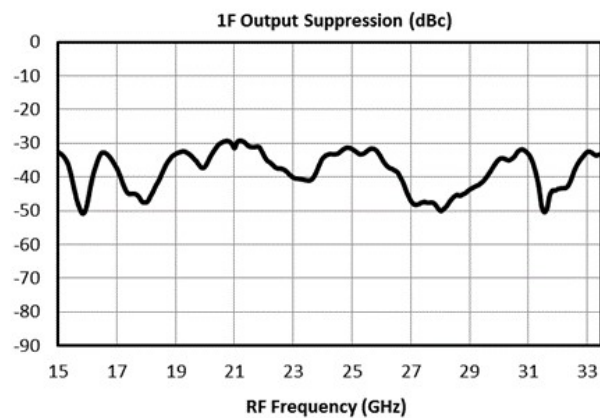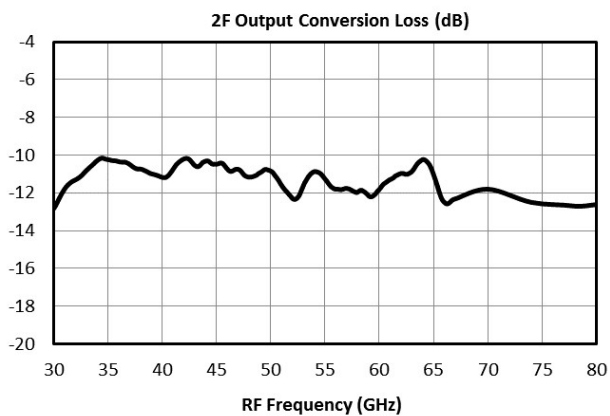

MMD-3580LU-KW GaAs MMIC Millimeter Wave Doubler

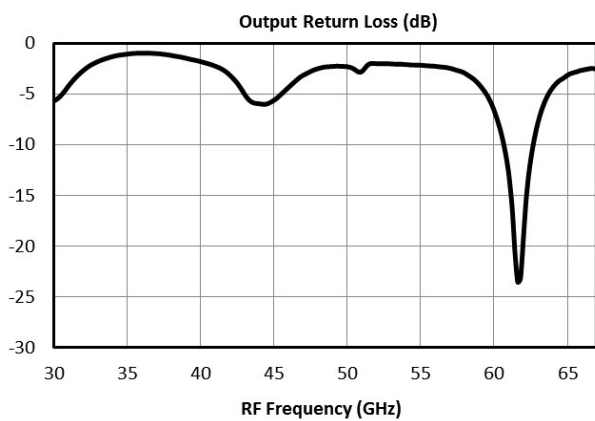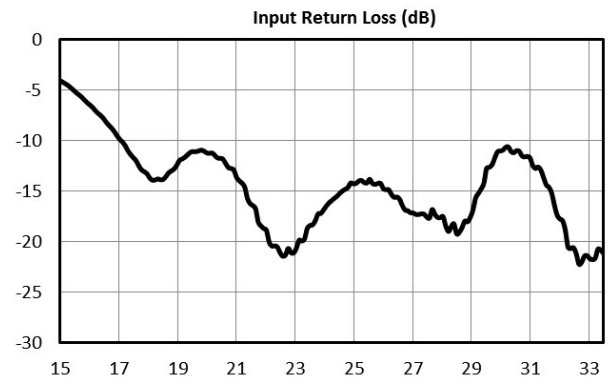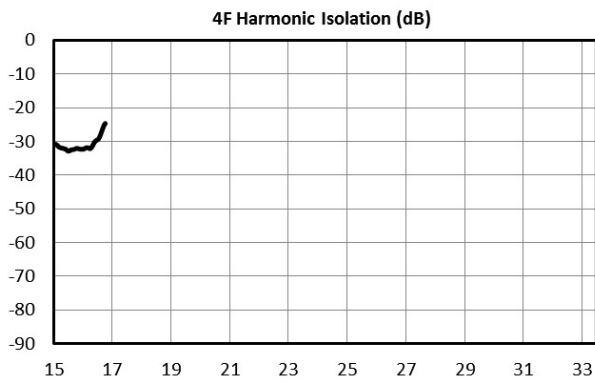

MMD-3580LU-KW



GaAs MMIC Millimeter Wave Doubler

Mechanical Data

Outline Drawing

Port	Connector Type
I	2.92mm Female
O	1.0mm Female

Note: S-Package Connectors are not removeable.

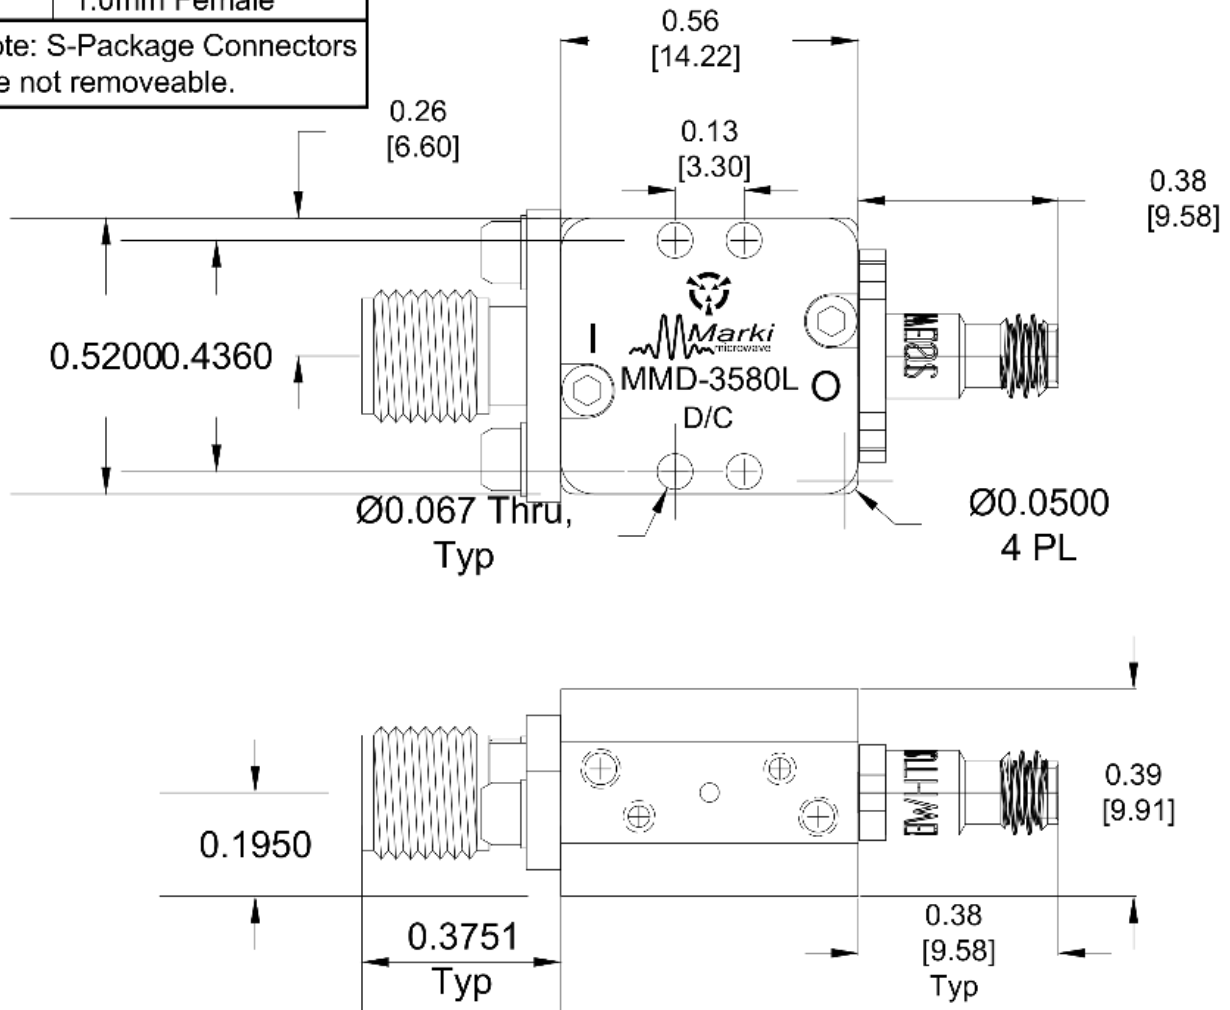

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2018 - 2019, Marki Microwave, Inc