


MPD-0226SM

2-26.5 GHz MMIC 2-way Power Divider/Combiner

DEVICE OVERVIEW

General Description

MPD-0226SM is a MMIC 2-way Wilkinson power divider. Passive GaAs MMIC technology allows production of smaller constructions that replace larger form factor circuit board constructions. Tight fabrication tolerances result in less unit to unit variation than traditional power divider technologies, allowing for accurate simulations using the provided S3P file taken from measured production units. Power dividers are passive reciprocal devices that can be used either as power combiners or as power dividers. Applications include Radar, Satcom, EW and test equipment. The MPD-0226SM is available as a 4 X 4 mm QFN package. Evaluation boards are also available.



[Download s-parameters here](#)


Features

- 2 GHz to 26.5 GHz In-phase Power splitting
- 20 dB Typical Output to Output Isolation
- Outstanding phase and amplitude balance
- RoHS Compliant

Applications

N/A

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
EVAL-MPD-0226	Evaluation Board, 2-26.5 GHz MMIC 2-way Power Divider/Combiner	-	-	RoHS	Released	EAR99
MPD-0226SM	2-26.5 GHz MMIC 2-way Power Divider/Combiner	QFN	-	RoHS	Released	EAR99
MPD-0226-TR	Tape and Reel, 2-26.5 GHz MMIC 2-way Power Divider/Combiner	QFN	7"	RoHS	Released	EAR99

Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Diagram
 - Port Functions
- **Revision History**
- **Specifications**
 - Absolute Maximum Ratings
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing
- **Footprint Image**


Revision History

Revision Code	Revision Date	Comment
-	2020-06-01	Initial Datasheet Release
A	2021-01-01	Specs table update
B	2022-03-01	Power Handling Specs Updated




Port Configuration and Functions

Port Diagram

A bottom-up view of the MPD-0226SM's SM package outline drawing is shown below. The MMIC Power dividers are passive reciprocal devices allowing either power splitting or power combining.

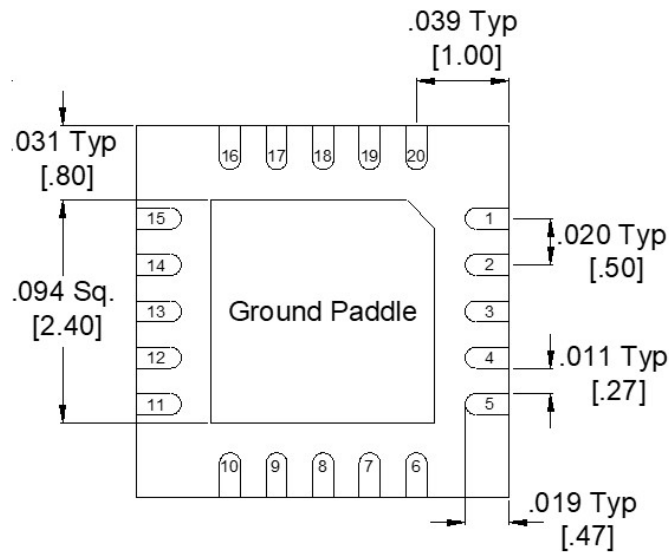

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Pad	Ground	SM package ground path is provided through the ground paddle.	Pad 
Pin 1	Output 1	The output 1 port is DC short to the other two ports and open to ground.	
Pin 13	Input/common	The common port is DC short to the other two ports and open to ground.	
Pin 5	Output 2	The output 2 port is DC short to the other two ports and open to ground.	

MPD-0226SM

2-26.5 GHz MMIC 2-way Power Divider/Combiner

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
DC Current	60	mA
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
RF Power Handling as a Power Combiner	2	W
RF Power Handling as a Power Divider	20	W

Package Information

Parameter	Details	Rating
Dimensions	-	4x4 mm

MPD-0226SM

2-26.5 GHz MMIC 2-way Power Divider/Combiner

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Min and Max limits are guaranteed at TA=+25°C. All measured data is taken from the eval board without de-embedding of the connectors and traces.






Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Nominal Phase Shift	-	2	26.5	-	0	-	°
Phase Balance	-	2	26.5	-	2	8.5	°
Insertion Loss ¹	-	2	20	-	1.5	4	dB
Insertion Loss ²	-	20	26.5	-	3	6	dB
VSWR	-	2	26.5	-	1.25	-	-
Isolation	-	2	26.5	-	20	-	dB
Impedance	-	-	-	-	50	-	Ω
Amplitude Balance	-	2	26.5	-	0.2	0.8	dB
Nominal Power Splitting (dB)	-	2	26.5	-	3	-	dB

[1][2] Excess Insertion Loss = (Input Port to Common Port Insertion Loss) - 6dB

MPD-0226SM

2-26.5 GHz MMIC 2-way Power Divider/Combiner

Typical Performance Plots

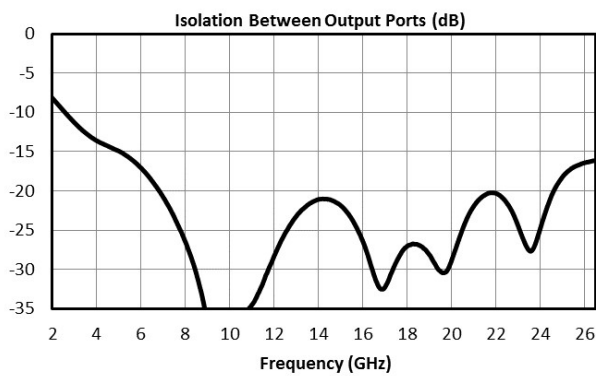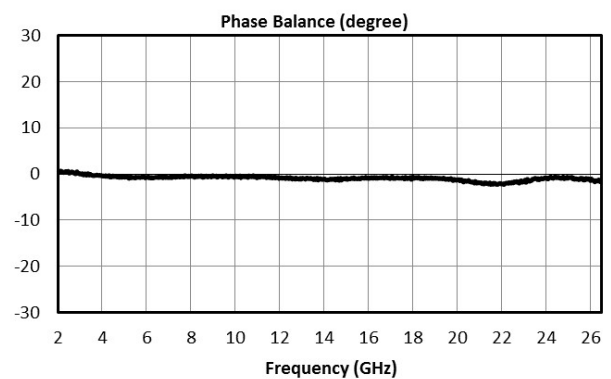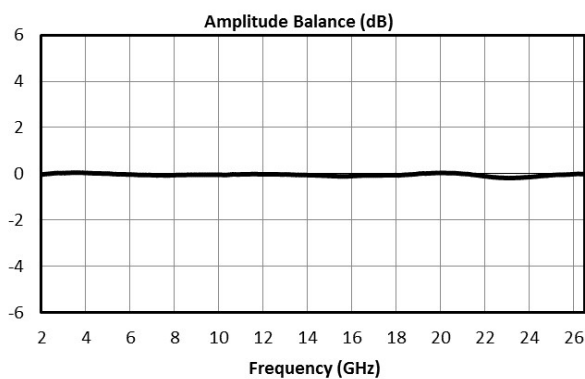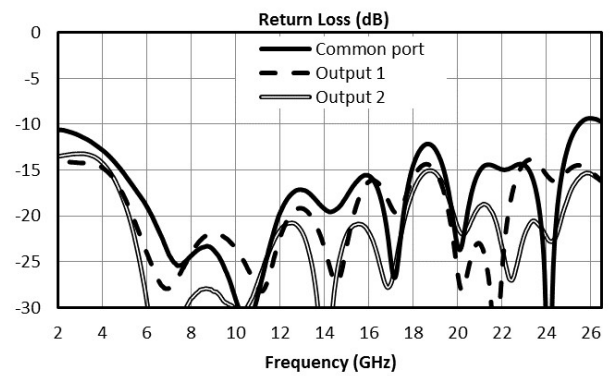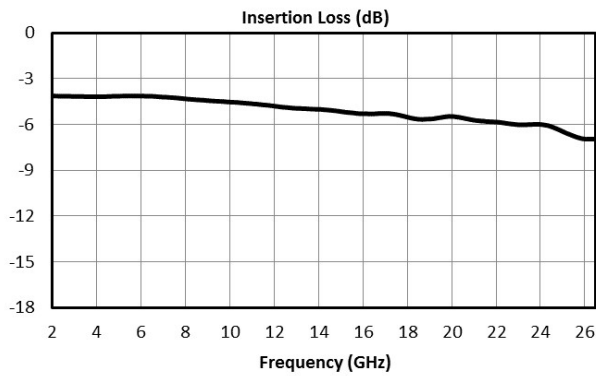


MPD-0226SM

2-26.5 GHz MMIC 2-way Power
Divider/Combiner

Mechanical Data

Outline Drawing

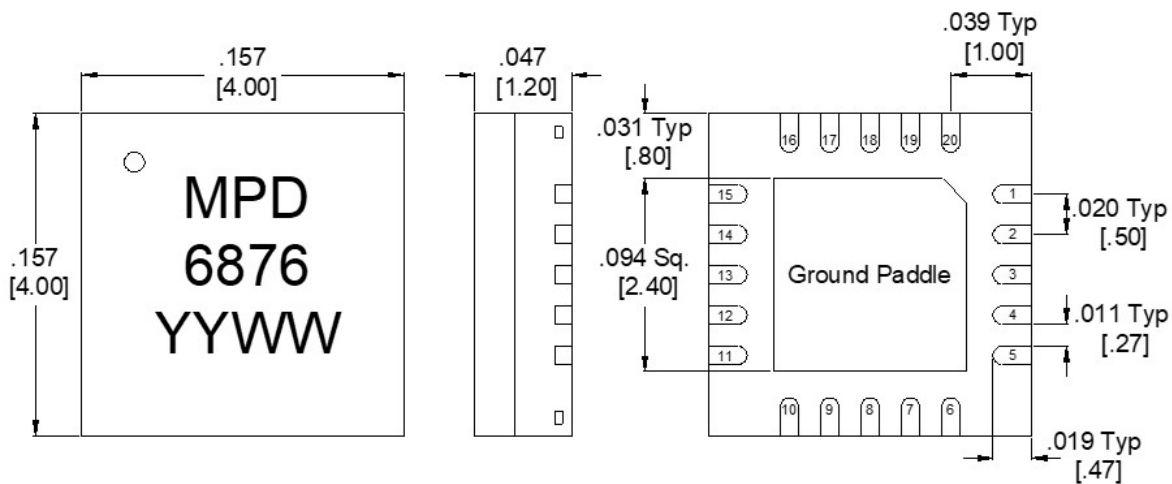

Pad #	Function
1	O1
2	N/C
3	N/C
4	N/C
5	O2
6	N/C
7	N/C
8	N/C
9	N/C
10	N/C
11	N/C
12	N/C
13	IN
14	N/C
15	N/C
16	N/C
17	N/C
18	N/C
19	N/C
20	N/C


Notes:

- Substrate material is LCP.
- I/O Leads and Ground Paddle plating is (from base to finish):
Ni: 0.5um MIN
Pd: 0.02um MIN
Au: 0.05um MAX
- All unconnected pins should be connected to PCB RF ground.

MPD-0226SM

2-26.5 GHz MMIC 2-way Power
Divider/Combiner



Footprint Image

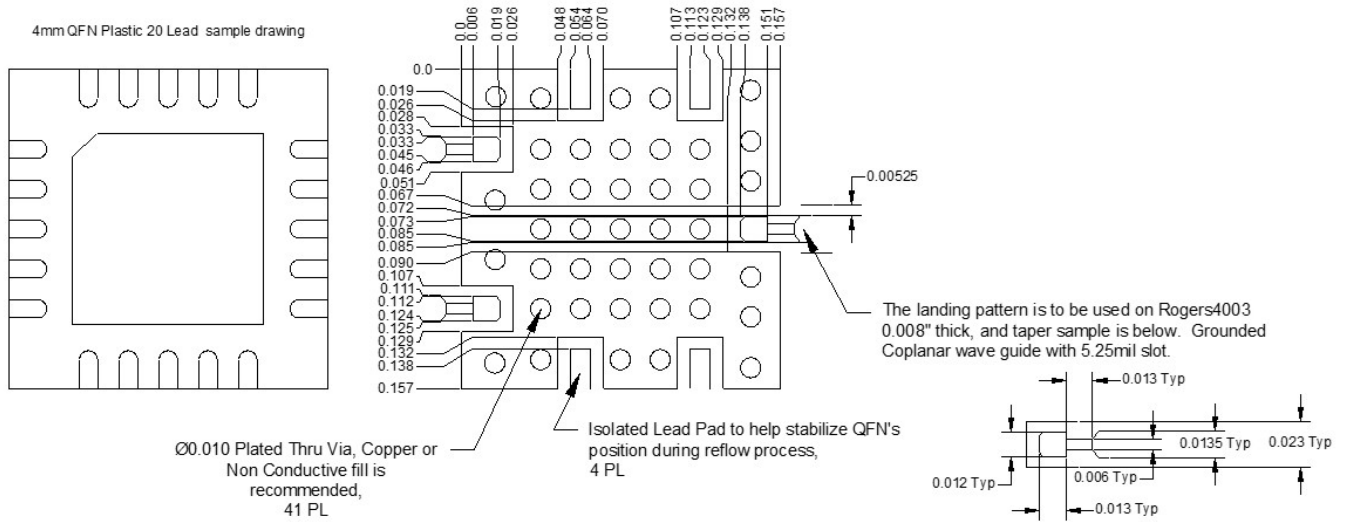

MPD-0226SM

2-26.5 GHz MMIC 2-way Power
Divider/Combiner

All measurements are typical

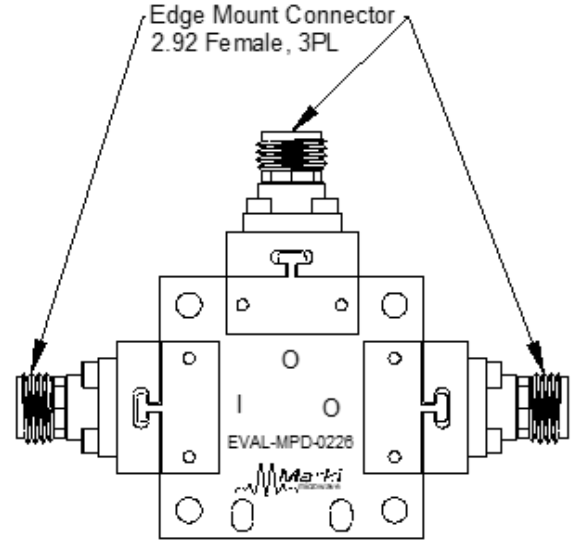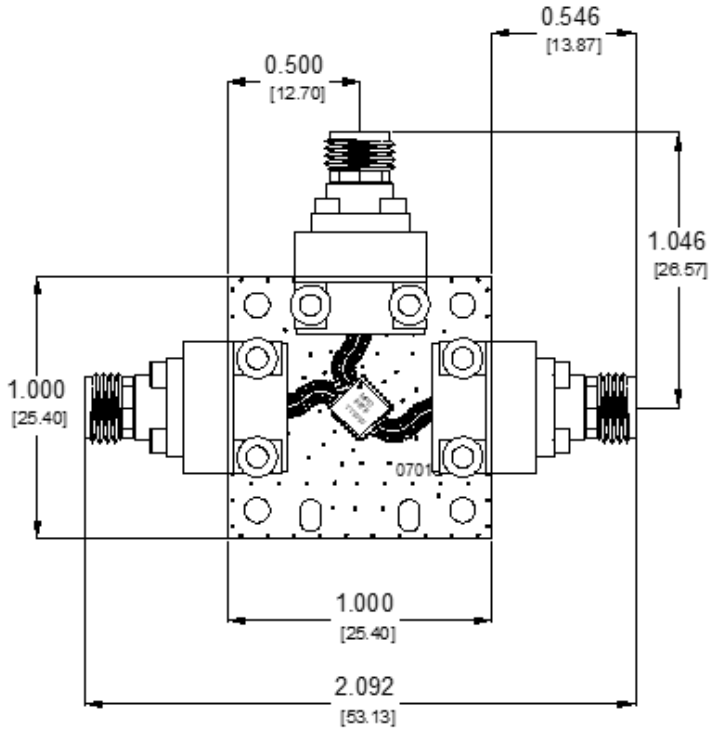

Backside Label

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020 - 2022, Marki Microwave, Inc