



RESISTIVE POWER DIVIDER

PD-0020

Features

- DC to 20 GHz In-phase Power Splitting
- 0.5 dB Typical Insertion Loss
- Outstanding Phase and Amplitude Balance




Electrical Specifications – Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency Range	Min	Typ	Max
Nominal Power Splitting (dB)	DC to 20 GHz		6	
Excess Insertion Loss (dB) ¹			0.5	1.5
Nominal Phase Shift (Degrees)			0	
Amplitude Balance (dB)			±0.2	±0.75
Phase Balance (Degrees)			±2	±10
VSWR			1.25	1.65
Input Power (Watt)				1
Weight (g)			10.5	

¹Excess Insertion Loss = (Common Port to Output Port Insertion Loss) – 6 dB.

Model Number	Description
PD-0020	DC to 20 GHz Power Divider with SMA connectors ¹

¹Default is SMA female connectors. Consult factory for other connector options.

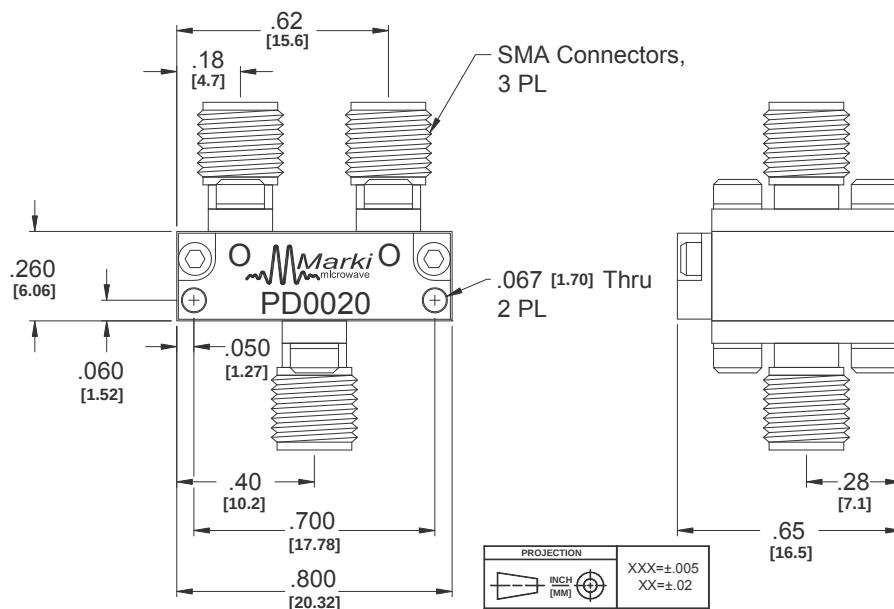




RESISTIVE POWER DIVIDER

PD-0020

Page 2

Circuit Schematic

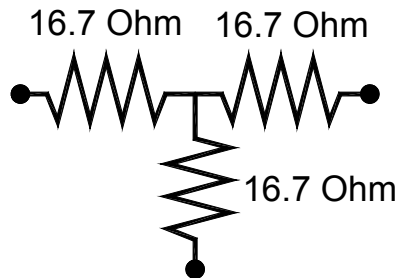

Typical Performance

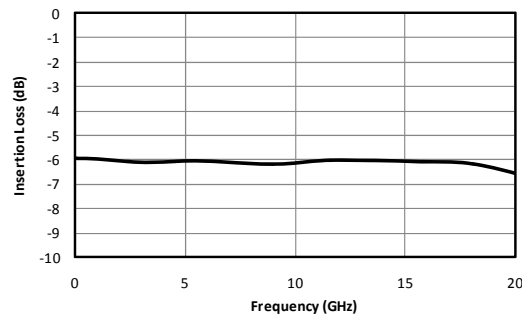


Fig. 1. Common port to output port insertion loss.

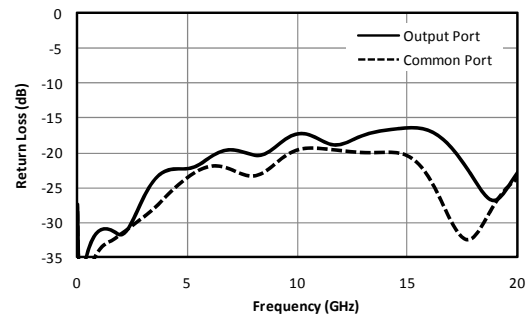


Fig. 2. Return loss for output and common ports.

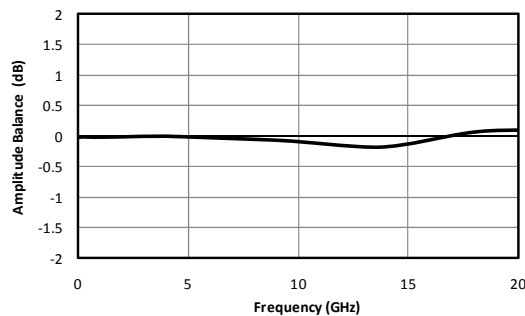


Fig. 3. Amplitude balance between output ports.

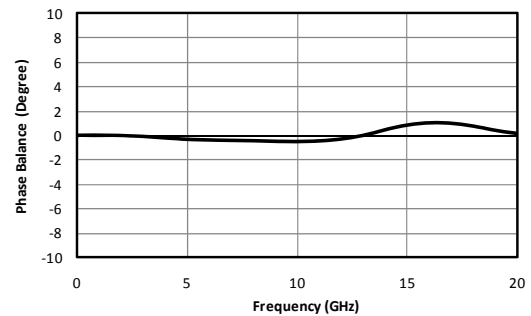


Fig. 4. Phase balance between output ports.

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.