

PD-0030

Resistive Power Divider

DEVICE OVERVIEW

General Description

The PD-0030 is a resistive 2-way power divider that features broadband operation from DC to 30 GHz. Resistive power dividers offer 6 dB nominal insertion loss and excellent amplitude and phase balance. Resistive power dividers are not recommended for use as a power combiner due to the lack of isolation.

[Download s-parameters here](#)


Features

- DC to 30 GHz In-phase Power Splitting
- 0.5 dB Typical Insertion Loss
- Outstanding Phase and Amplitude Balance

Applications

N/A

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Packing Size	Green Status	Product Lifecycle	Export Classification
PD-0030	Resistive Power Divider	-	-	RoHS	Released	EAR99



Table Of Contents

- **Device Overview**
 - General Description
 - Features
 - Applications
 - Functional Block Diagram
- **Port Configuration and Functions**
 - Port Functions
- **Revision History**
- **Specifications**
 - Package Information
 - Electrical Specifications
 - Typical Performance Plots
- **Mechanical Data**
 - Outline Drawing

Revision History

Revision Code	Revision Date	Comment
-	2009-11-01	Datasheet Initial Release
A	2019-09-01	Updated Circuit

Port Configuration and Functions

Port Functions

Port	Function	Description	Equivalent Circuit for Package
Port 1	Out 1	RF output 1 of the combiner	-
Port 2	Out 2	RF output 2 of the combiner	-
Port 3	IN/OUT	RF input/output of the combiner	-

Specifications

Package Information

Parameter	Details	Rating
Weight	-	10.5g
Dimensions	-	20.32x6.06mm





Electrical Specifications

Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
Nominal Phase Shift	DC-30GHz	-	-	-	0	-	°
Phase Balance	DC-30GHz	-	-	-	2	8	°
Insertion Loss ¹	DC-30GHz	-	-	-	0.5	2	dB
VSWR	DC-30GHz	-	-	-	1.2	-	-
Amplitude Balance	DC-30GHz	-	-	-	0.25	0.75	dB
Input Power	DC-30GHz	-	-	-	-	0.5	W
Nominal Power Splitting (dB)	DC-30GHz	-	-	-	6	-	dB
Weight	-	-	-	-	10.5	-	g


^[1] Excess Insertion Loss = (Input Port to Common Port Insertion Loss) - 6dB

Typical Performance Plots

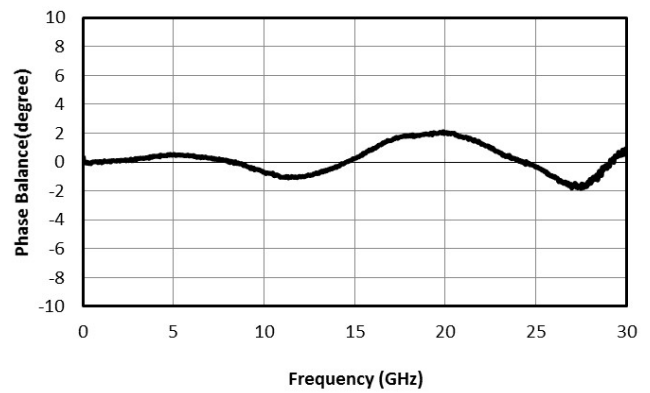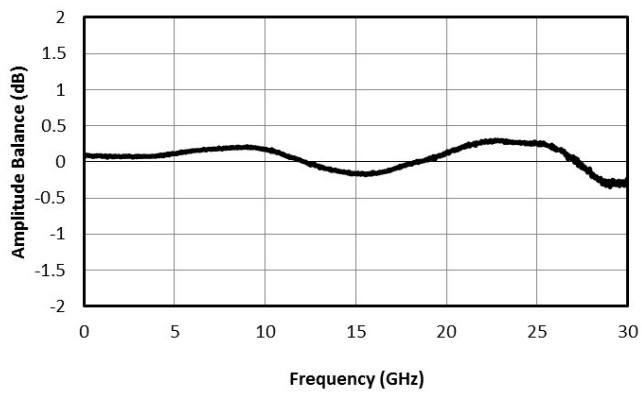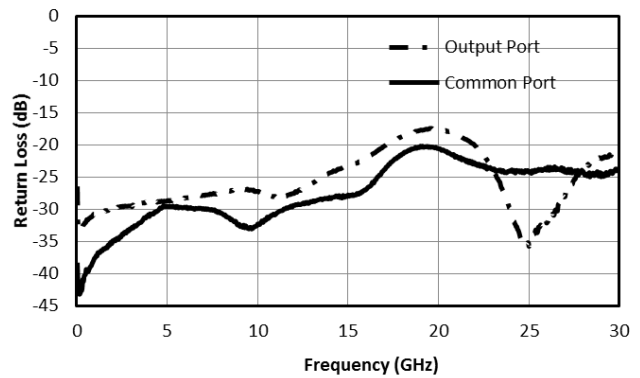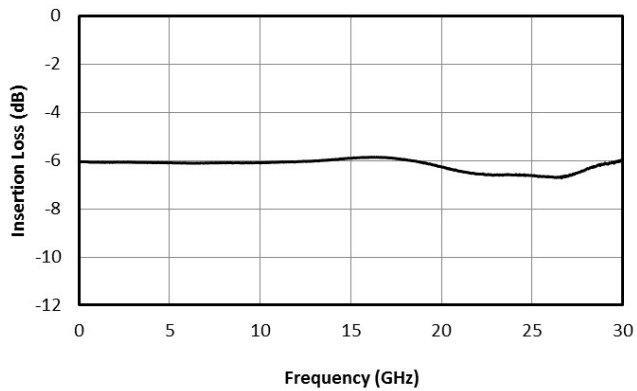

Mechanical Data

Outline Drawing

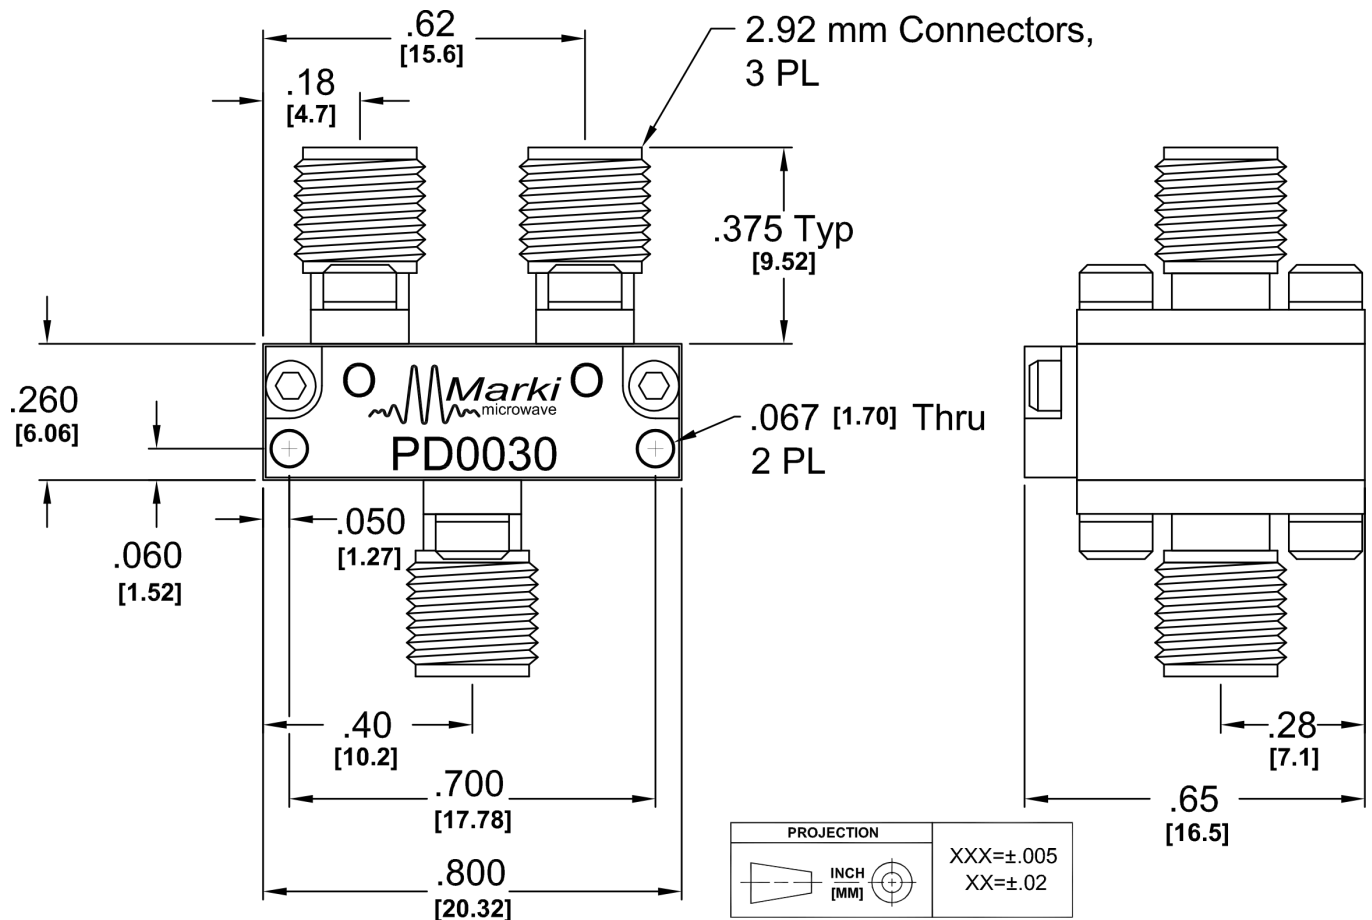

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product.

Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2009, 2019, Marki Microwave, Inc