



REVISIONS				
REV.	DESCRIPTION	DATE	BY	CHK.
-	INITIAL RELEASE			

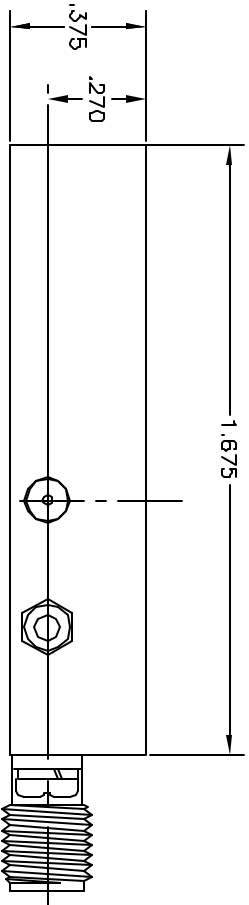

SPECIFICATIONS

FREQUENCY: 2-10 GHz
 ENR: 55 dB MIN.
 FLATNESS: 3 dB P-P MAX.
 IMPEDANCE: 50 OHMS NOMINAL
 DC BIAS: +15 ±1.5 VDC @ 200 mA MAX
 OP. TEMP: -30 TO +85° C

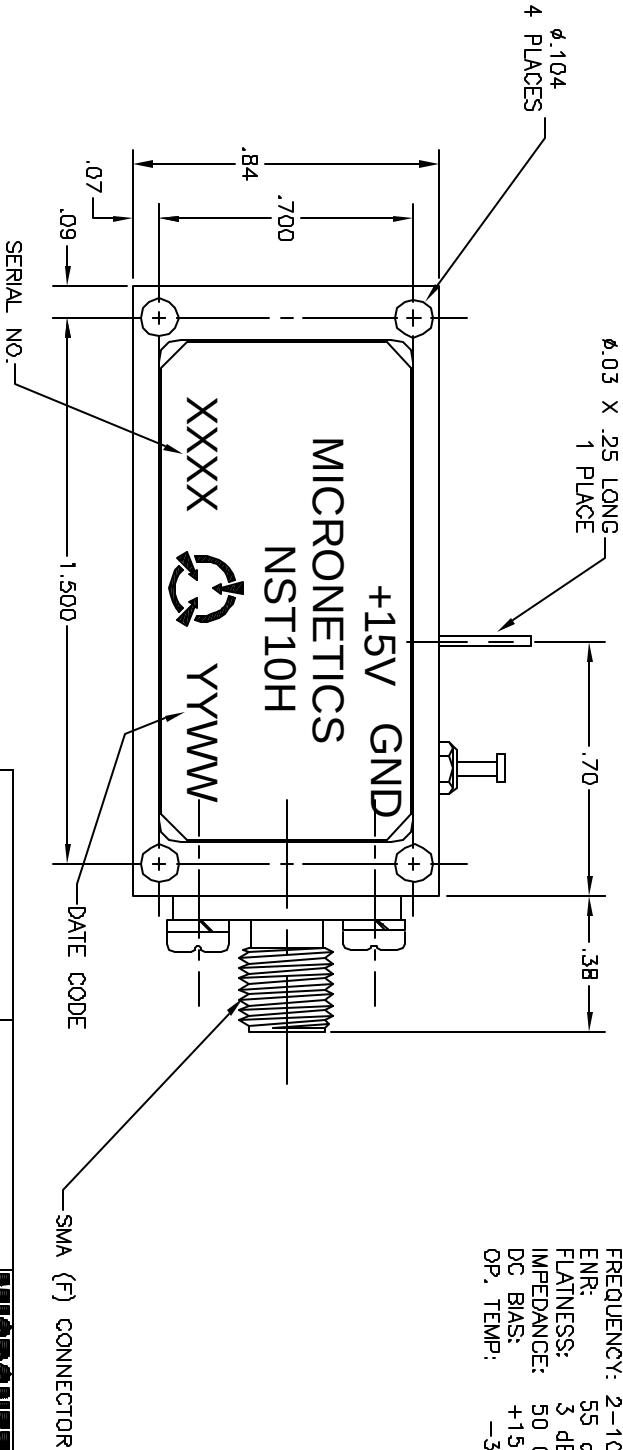

- NOTES:
 1. FINISH: MOUNTING SURFACE IS GOLD PLATE
 2. TOLERANCES:
 XXX = .01
 .XX = .020

DESIGN CONVENTIONS SPECIFIED DIMENSIONS ARE IN DECIMALS FRACTIONS DECIMALS ANGLES ± ± ±				CONTRACTOR NO.		DATE	
MATERIAL	SEE NOTE	TRAVERSE	1.000/1.000	4/10/03	APPROVALS	DATE	
FINISH	SEE NOTE	REWORK					
DO NOT SCALE DRAWING							
SCALE	1:1	SCALE	1:1	SCALE	1:1	SCALE	1:1

NST10H Outline & Specs

MICRONETICS
 38 BAMPFORD DRIVE • BOSTON, MASS. 02116
 TEL: (617) 864-8800 • FAX: (617) 864-8877

REV. 13501 NO. 54487 DWG. NO. NST10H70

SCALE 1:1