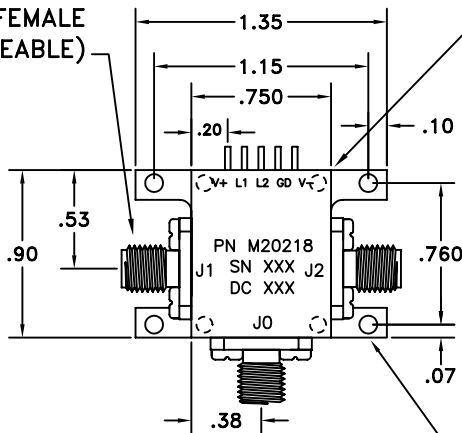


2


1

REVISIONS

ZONE	REV.	ECO NO.	DESCRIPTION	DATE	APPROVED		
					ENG.	QC.	MFG.
	1		ENGINEERING RELEASE				

SMA FEMALE
(FIELD REPLACEABLE)FAR SIDE (4 PL)
#2-56 UNC-2B X .12DP
(USED TO ATTACH MTG PLATE)

FREQ: 2-18Ghz
LOSS: 2dB
ISO: 60dB
VSWR: 2:1
SPEED: 100nS
RF PWR: 27dBm
DC PWR: +5,-12 or -15v

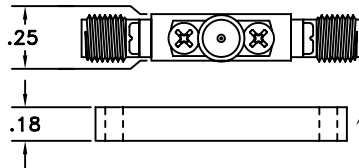MOUNTING PLATE (OPTIONAL)
WITH .096 DIA
THRU HOLES (4 PL)

TRUTH TABLE

L1	L2	SELECTED PATH
0	1	J0-J1
1	0	J0-J2

NOTES:

- MATERIAL: ALUMINUM 6061-T6.
 - BODY: PLATED WITH 200-300uIN SILVER PLATE PER QQ-S-365 TYPE II GRADE B.
 - COVERS: IRRIDITED, CHEMICAL FILM PER MIL-C-5541, CLEAR.
- FINISH
 - GRAY EPOXY PAINT

UNLESS OTHERWISE SPECIFIED	DRAWN BY M. ESPINOZA	DATE 01/15/08	MICRONETICS, INC. 26 HAMPSHIRE DRIVE * HUDSON, N.H. 03051 TEL.: (603) 883-2900 * FAX: (603) 882-8987	
	CHECKED BY	DATE		
	ENGINEER	DATE	TITLE SP2T SWITCH + MOUNTING PLATE	
	THIS DRAWING CONTAINS MATERIAL PROPRIETARY TO MICRONETICS		SIZE A	FSCM NO. 54487
DIMENSIONS ARE IN INCHES TOLERANCES ON FINISH: $\sqrt{}$ ANGLES: $\pm 1/2^\circ$ FRACTIONS: $\pm 1/64$ 4 PLACE DECIMALS: $\pm .0005$ 3 PLACE DECIMALS: $\pm .005$ 2 PLACE DECIMALS: $\pm .01$ COMMERCIAL PUBLISHED TOLERANCES SHALL APPLY TO TUBING, BAR, PLATE ETC. ALL THREADS TO BE CLASS 2A OR 2B. PLATED PARTS MUST FIT GAUGES AND MEET SPECIFIED TOLERANCES AFTER PLATING. CAUTION UNLESS THIS DRAWING BEARS AUTHORIZED SIGNED APPROVAL(S) IT IS PRELIMINARY AND IS NOT TO BE USED FOR MANUFACTURING PURPOSES.	THIRD ANGLE PROJECTION		DWG NO. M20218	
	DO NOT SCALE DRAWING		SCALE 1 TO 1	SHEET 1 OF 1

2

1